MILITARY STANDARD

MIL-STD-1320-15
(NAVY)


3 AUGUST 1976

SUPERSEDING
WR-51/15
30 JULY 1964

TRUCKLOADING
ROCKET MOTOR MK 1 MOD 0 OR MK 37 MOD 0 (ASROC) IN CONTAINER MK 178 MOD 0

CONTAINER DATA

LENGTH	76 7/8
WIDTH	20 1/4
HEIGHT	22 1/8
GROSS WT (APPROX)	613 LBS
TARE WT (APPROX)	219 LBS
CUBE	19 9 CU FT
DWG NO	LD 497696
DOT HAZARD CLASSIFICATION	EXPLOSIVES B

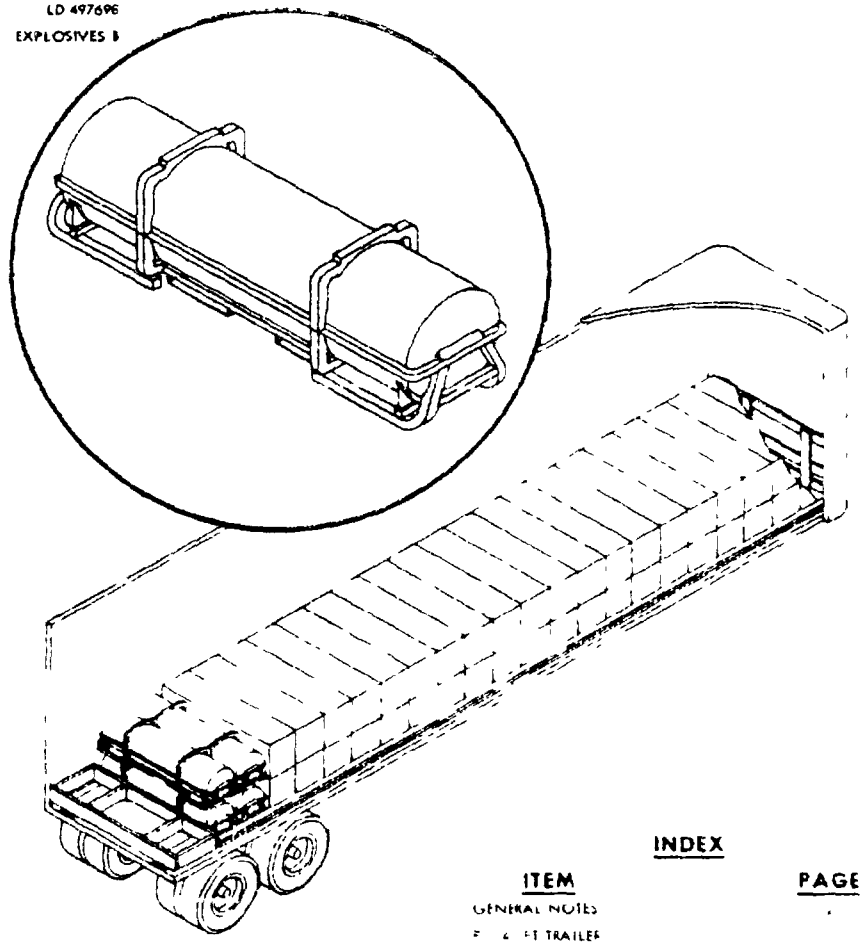

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

INDEX

ITEM	PAGE
GENERAL NOTES	2
4 FT TRAILER	
ALL TRAILERS	4
STACKING & STRAPPING	4

FSC 8140

AUTHORIZED FOR HIGHWAY SHIPMENT ONLY

SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE 7/28/76

SIGNATURE SEASYSCOM BY DIRECTION DATE 8/3/76

ORIGINATOR DATE 7/28/76

NAVAL WEAPONS HANDLING LABORATORY
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

THIS DOCUMENT PROVIDES DETAILED INSTRUCTIONS FOR TRUCKLOADING MK 1 MOD 0 AND MK 37 MOD 0 ROCKET MOTORS WHEN IN THE MOTOR IS IN THE CONTAINER MK 178 MOD 0

2 THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 42 44 AND 45 FT VAN TRAILERS WITH NAILABLE OR NON-NAILABLE FLOORS ALL TRAILERS SHALL HAVE THEIR TANDEM AXLES LOCATED IN THE WESTERN POSITION (AT THE EXTREME REAR OF THE TRAILER

THE CONTAINERS WHEN STACKED TWO HIGH SHALL BE STRAPPED TOGETHER IN UNITS OF FOUR AS SHOWN ON PAGE 5 IF REQUIRED B THE LENGTH OF THE TRAILER TWO CONTAINERS MAY BE STACKED (ONE ON TOP OF THE OTHER) AND STRAPPED TOGETHER DO NOT PLACE THIS UNIT OF TWO AT THE REAR OF THE LOAD IT SHALL BE LOCATED A MINIMUM OF TWO UNITS FORWARD OF THE REAR OF THE UNITS STRAPPED IN FOURS

THE REAR BLOCKING ASSEMBLY DETAIL B SHALL FILL THE VOID BETWEEN THE LADING AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED

WARNING

DO NOT USE TRAILERS WITH ROLL UP DOORS WHEN BLOCKING BY THIS METHOD

5 WHEN A TRAILER HAS NON-NAILABLE FLOORS AND SLEEPERS CANNOT BE NAILED TO THE FLOOR SUBSTITUTE FILLER ASSEMBLY DETAIL C FOR THE SLEEPER. THE FILLER ASSEMBLY SHALL FILL THE VOID BETWEEN THE LADING AND THE TRAILER WALLS ONE-HALF INCH SLACK IS PERMITTED

THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS

7 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA CLOSE AND SEAL TRAILER DOORS AND ATTACH "EXPLOSIVE B" PLACARD TO BOTH SIDES FRONT AND BACK OF TRAILER

8 APPLICABLE MATERIAL SPECIFICATIONS DUNNAGE LUMBER, MM-L-751 NAILS FF-N-105 TYPE II STYLE COMMON BRIGHT STRAPPING QQ-S-781 TYPE I CLASS A


9 FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY)

FTL 40, 42, 44 & 45 FT TRAILERS (VAN)

A FULL TRUCKLOAD FOR A 40 FT TRAILER IS 22 CONTAINERS AND IS SHOWN ON PAGE 3 A FULL TRUCKLOAD FOR OTHER LENGTH TRAILERS IS


TRAILER LENGTH	NO OF CONTAINERS	TRUCKLOAD WT (APPROX)
40	44	26 194 LBS
44	48	29 474 LBS
45	50	30 650 LBS

BLOCK AND BRACE ALL TRAILERS USING THE PRINCIPLES SHOWN ON PAGE 4 SEE GENERAL NOTE 4

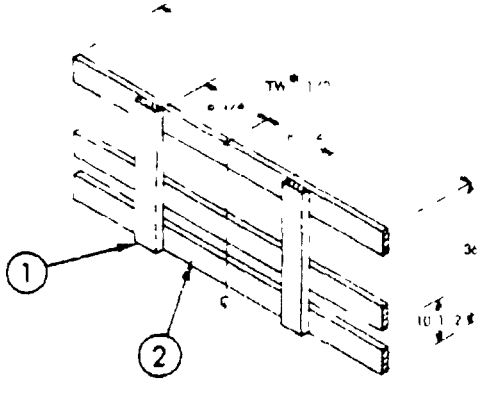

DETAIL A

FRONT BULKHEAD
(1 REQUIRED)

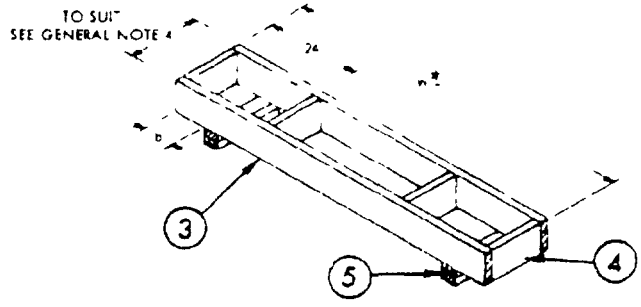


DETAIL B

REAR BLOCKING ASSEMBLY
(1 REQUIRED)


* TW = TRAILER WIDTH

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

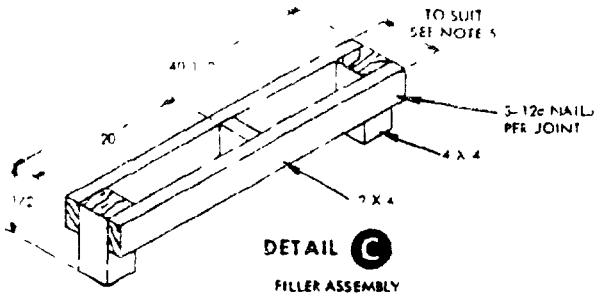


DETAIL C

FILLER ASSEMBLY
(FOR TRAILERS WITH NON-NAILABLE FLOORS)

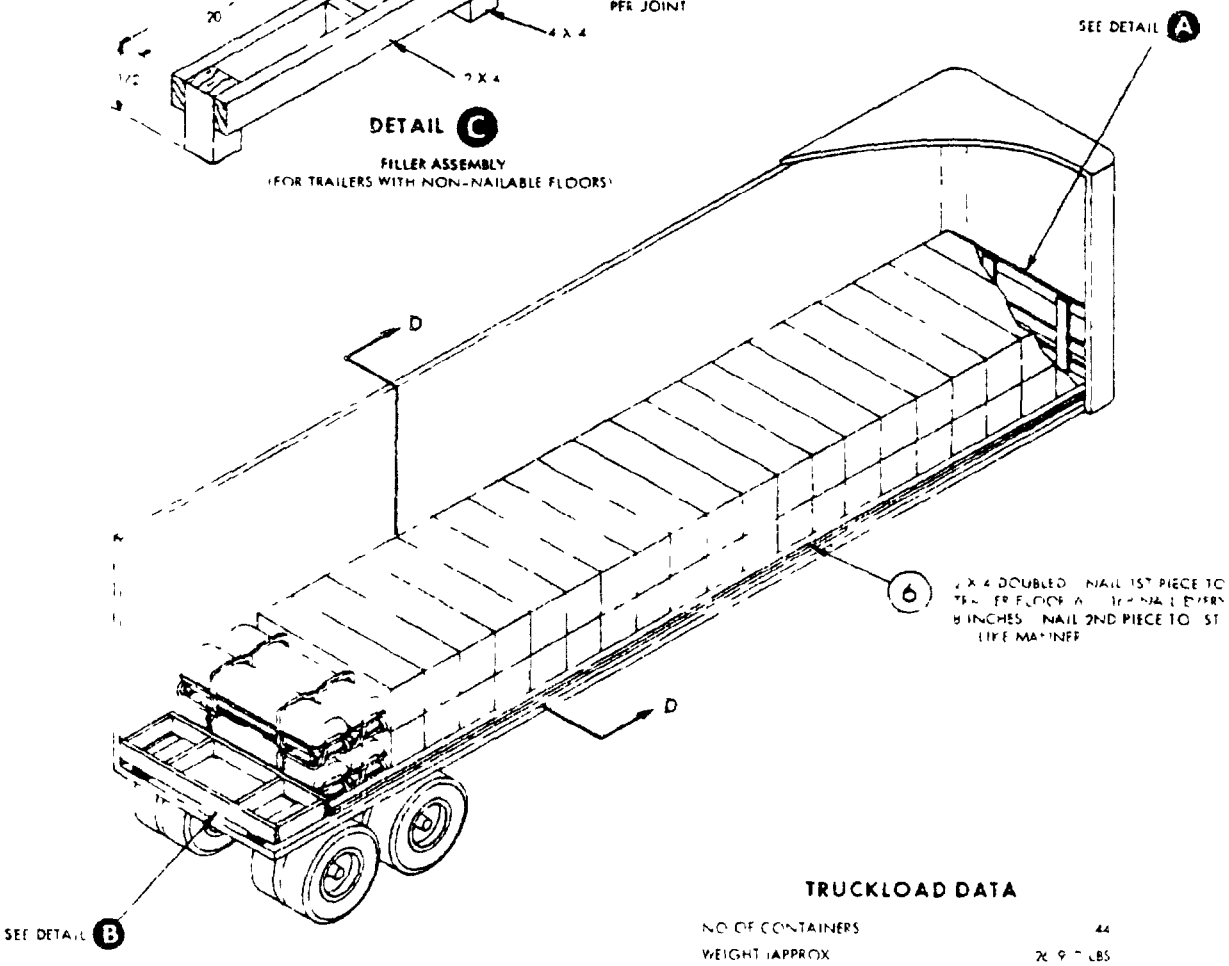

TRUCKLOAD DATA

NO OF CONTAINERS	44
WEIGHT (APPROX	LBS

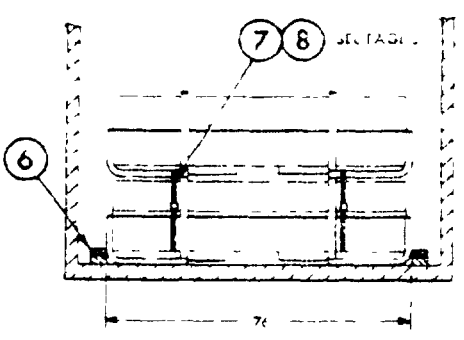

SECTION D-D

PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
8	STRAP SEAL	FOR 2 X 4 STRAP				
7	STEEL STRAP					
6	SLEEPER			SEE FIELD NOTE		
5	SILL					
4	TRUSS		4	SEE 7		
3	HOR 2D INT		4	4 JOINTS TOG		
2	HOR 2D INT		SET			
1	VERTICAL			4 JOINTS TOG		

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.


LTL ALL LENGTH TRAILERS (VAN)

1 WHEN REQUIRED TO SHIP LESS THAN TRUCKLOAD DECREASE THE NUMBER OF CONTAINERS IN THE SECOND LAYER STARTING AT THE REAR OF THE LOAD AND WORKING FORWARD BLOCK AND BRACE USING THE PRINCIPLES SHOWN ON PAGE 3

2 WHEN THE SECOND LAYER HAS BEEN REMOVED DECREASE THE NUMBER OF CONTAINERS STARTING AT THE REAR OF THE LOAD AND WORKING FORWARD BLOCK AND BRACE AS SHOWN FOR THE LTL BELOW


WARNING

DO NOT USE TRAILERS WITH NON-NAILABLE FLOORS WHEN BLOCKING BY THIS METHOD
TRAILERS MUST HAVE NAILABLE FLOORS

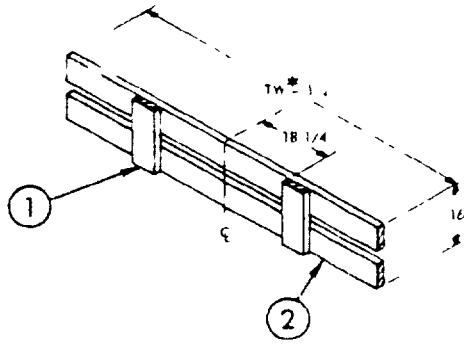

DETAIL E

FRONT BULKHEAD
(1 REQUIRED

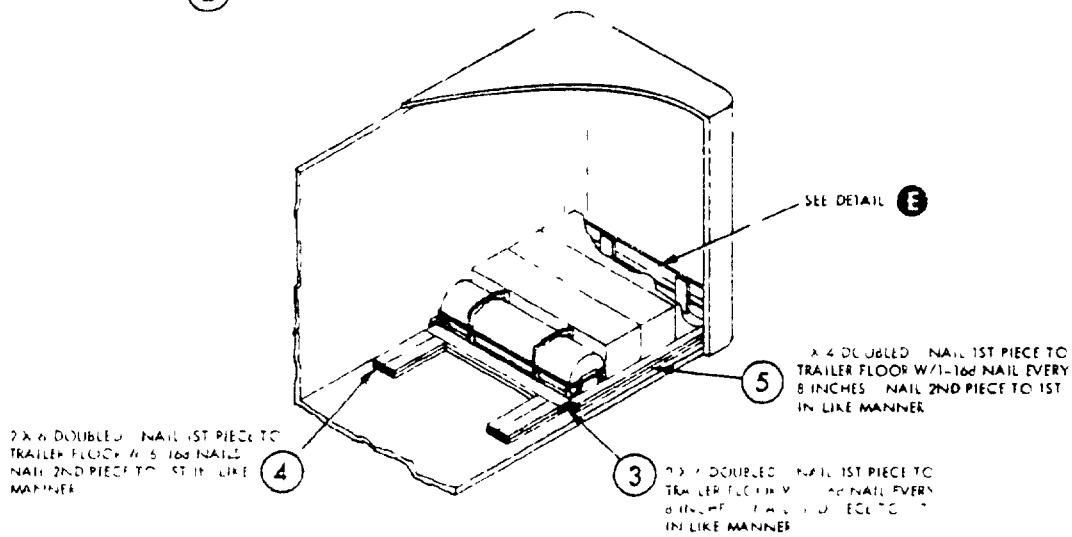

2 X 4 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER

2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER

2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER

* TW = TRAILER WIDTH


PIECE NO	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS	
					NUMBER	SIZE
5	SLEEPER	2 X 4 X 72" (RANDOM LENGTHS		SEE FIELD NOTE		
4	BACKUP CLEAT	2 X 6 X 30	8	SEE FIELD NOTE		
3	CROSSMEMBER	2 X 6 X 70 1/2	2	SEE FIELD NOTE		
2	HORIZONTAL	2 X 6 X TW*	2	SEE 1		
1	VERTICAL	2 X 6 X 10	2	2	4/JOINT	10d

LIST OF MATERIALS & NAILING DATA

TYPICAL LTL (VAN)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

STACKING AND STRAPPING FOR TRUCKLOADING ONLY

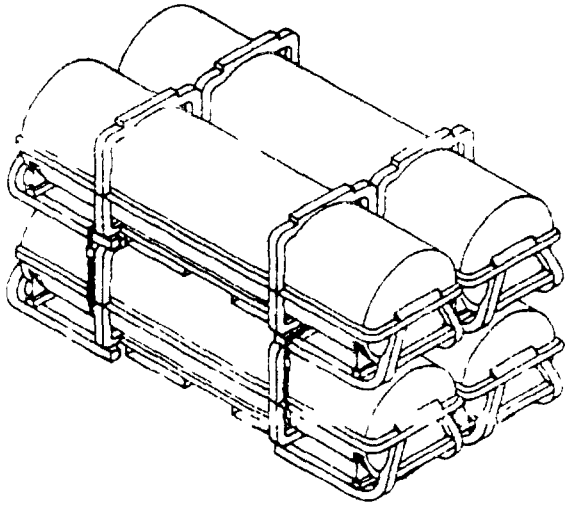

TO EXPEDITE TRUCKLOADING HANDLING AND LOADING OPERATIONS AND TO ASSURE THAT THE STACKING FEATURES REMAIN ENGAGED CONTAINERS SHALL BE STACKED AND STRAPPED TOGETHER IN ACCORDANCE WITH THE FOLLOWING PROCEDURE

1. POSITION BOTTOM CONTAINERS SIDE BY SIDE WITH THE FORE AND AFT ENDS IN THE SAME DIRECTION
2. POSITION THE TOP CONTAINERS ON THE BOTTOM CONTAINERS WITH THE FORE AND AFT ENDS IN THE SAME DIRECTION AS THE BOTTOM CONTAINERS

CAUTION

ALL STACKING FEATURES MUST BE IN ALIGNMENT

3. POSITION TWO 1 1/4 IN x 0.035 IN STEEL STRAPS UNDER THE BODY OF THE BOTTOM TWO CONTAINERS AND OVER THE SKIDS OF THE TOP TWO CONTAINERS AS SHOWN
4. TENSION AND SEAL WITH ONE DOUBLE NOTCHED 3/4 IN SEAL OR TWO DOUBLE CRIMPED 3/4 IN SEALS

WARNING

STRAPPING SHALL BE REMOVED FROM CONTAINERS INDIRECTLY AFTER UNLOADING THE TRAILER

REVIEW ACTIVITY
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO. 8140-N034)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1320-15 (NAVY)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED S/N 0102-014-1802

☆U.S. GOVERNMENT PRINTING OFFICE 1976—603-766/5958

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

DOD 316

Naval Weapons Station Earle (803)
Colts Neck, N.J. 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.