MILITARY STANDARD


MIL-STD-1320-219 (NAVY)

25 SEPTEMBER 1985


TRUCKLOADING MINE, UNDERWATER MK 67, SERVICE OR EXERCISE AND TRAINING IN CONTAINER MK 704 MOD 0

CONTAINER DATA

WEIGHT, EMPTY	625 LBS
WEIGHT, LOADED	2385 LBS
DIMENSIONS	170 7/16 L X 29 3/8 W X 31 7/8 H
CUBE	92.4 CU FT
SERVICE MINE	
DOT HAZARD CLASSIFICATION	EXPLOSIVE A
C.G. HAZARD CLASS	X-B
UNC	
SERVICE MINE	A-0137
EXERCISE & TRAINING MINE	C-0137

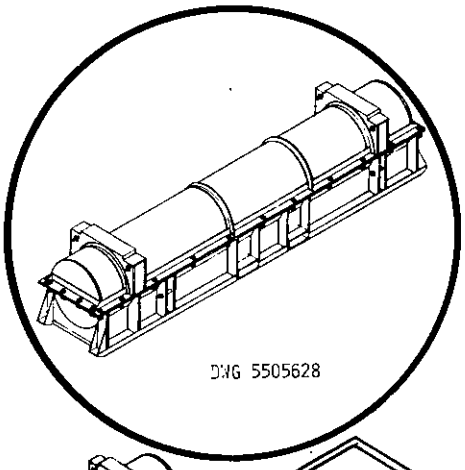

DWG 5505628

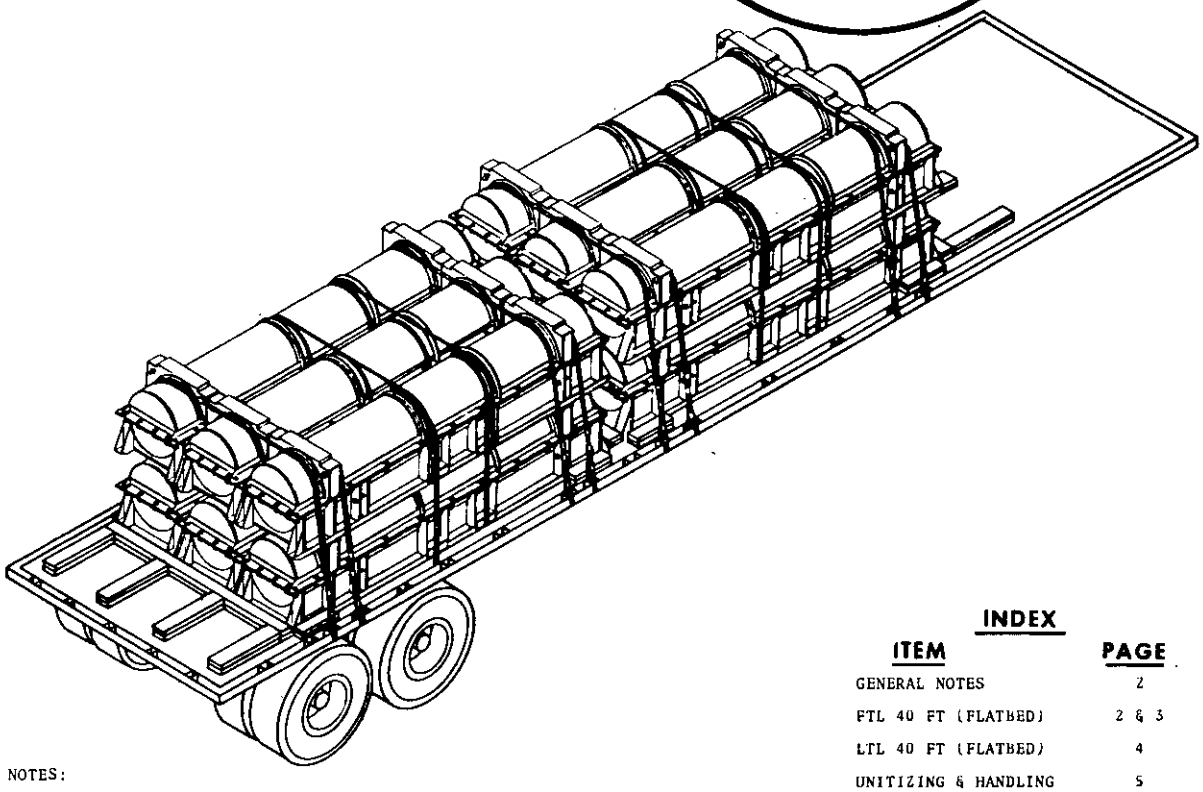

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40 FT (FLATBED)	2 & 3
LTL 40 FT (FLATBED)	4
UNITIZING & HANDLING	5

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

W.S. Gray NWHC 9/19/85
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

9/24/85
SIGNATURE SEASYSCOM BY DIRECTION DATE

ORIGINATOR 9/19/85
DATE

NAVAL WEAPONS HANDLING CENTER
WRNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil - Downloaded: 2026-10-25T20:45Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE UNDERWATER MINE, MK 67 (SLMM) IN THE CONTAINER MK 687 MOD 0.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT FLATBED TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH METAL FLOORS.
3. WHEN THE CONTAINERS ARE TWO HIGH, THEY SHALL BE UNITIZED AS SHOWN ON PAGE 6.

WARNING

TO AVOID TOPPLING SPECIAL CARE SHOULD BE TAKEN WHEN MOVING UNITIZED CONTAINERS. THE UNITIZING OF THE CONTAINERS IS AUTHORIZED AS PART OF THE TRUCKLOADING PROCEDURE ONLY. UNITIZING IS TO ENSURE CONTINUOUS ENGAGEMENT OF THE STACKING FEATURES AND MOVEMENT OF UNITIZED CONTAINERS SHOULD BE LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER.

4. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
5. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA AND ATTACH APPROPRIATE EXPLOSIVES PLACARD AS SPECIFIED IN TABLE I TO BOTH SIDES, FRONT AND BACK OF THE TRAILER.
6. UNLESS OTHERWISE SPECIFIED, ALL MATERIAL SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.
7. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.

FTL 40 FT. TRAILER (FLATBED)


1. EACH STACK OF CONTAINER SHALL BE SECURED TOGETHER WITH TWO 1 1/4 X .035 CROSS STRAPS. THE STRAPS PASS OVER THE COVERS OF THE CONTAINERS IN THE TOP LAYER AND RETURN PASSING THROUGH THE FORKLIFT POCKETS OF THESE CONTAINERS, BINDING THE TOP LAYER TOGETHER.
2. LOAD BINDERS AND CHAINS MAY BE USED AS AN ALTERNATE FOR THE 2 INCH STRAPPING SUBSTITUTE ONE CHAIN AND LOAD BINDER FOR EACH 2 INCH STRAP. LAMINATED DOUBLED 2 X 6'S SHALL BE USED OVER THE TOP OF THE CONTAINERS TO PREVENT DAMAGE BY THE CHAIN AND THE CHAIN SHALL BE SECURED TO THE BOARDS WITH FOUR 20d NAILS BY DRIVING THE NAIL THROUGH THE CHAIN LINK INTO THE BOARD AND CLINCHING THE NAIL OVER THE CHAIN.
3. CHAINS AND LOAD BINDERS SHALL MEET THE REQUIREMENTS OF THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 AND BE APPLIED AS SHOWN IN THIS DOCUMENT.


   PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY NAVWEPS OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626, ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

TRUCKLOAD DATA

NUMBER OF UNITS 12
WEIGHT 31920

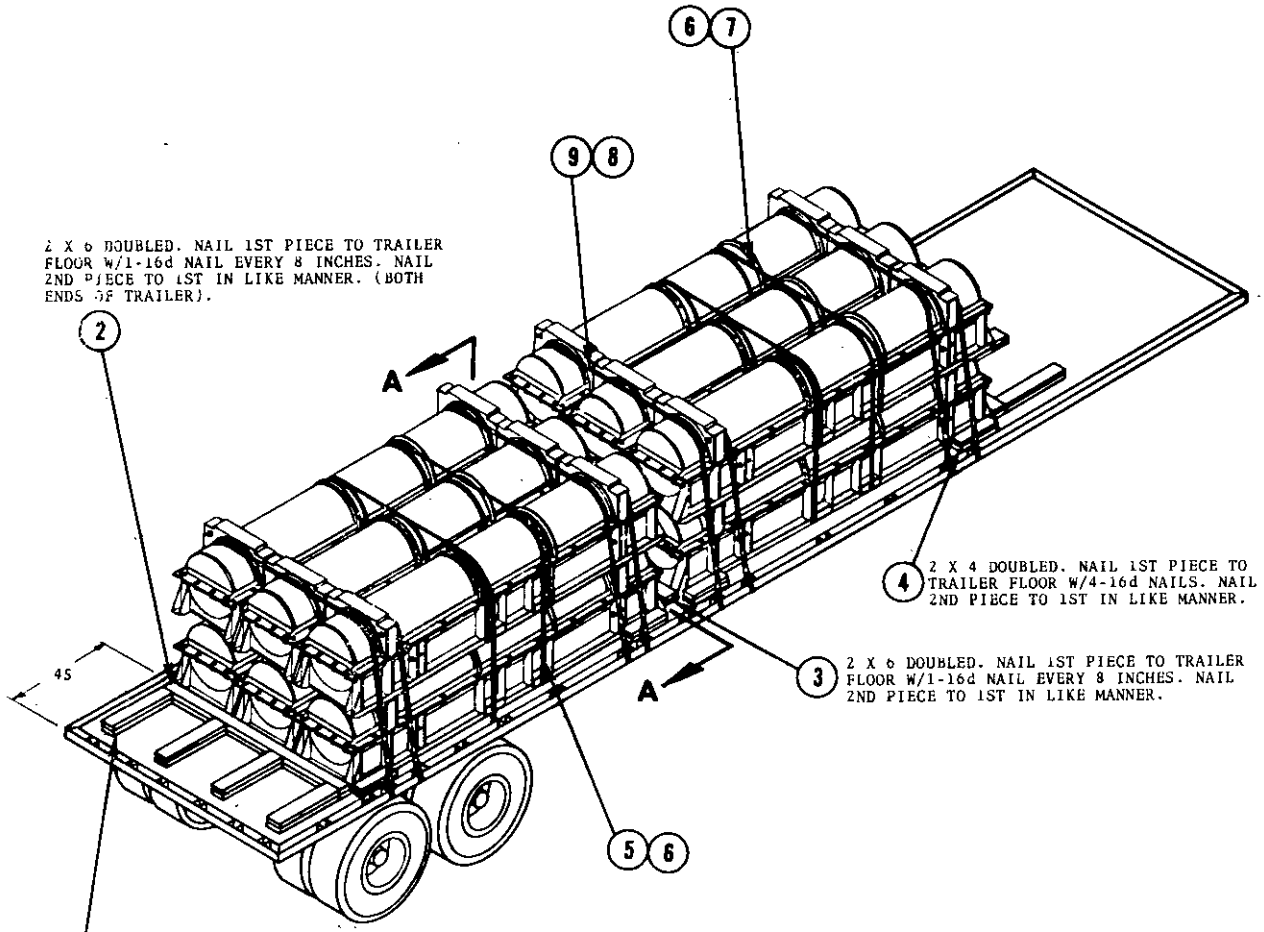

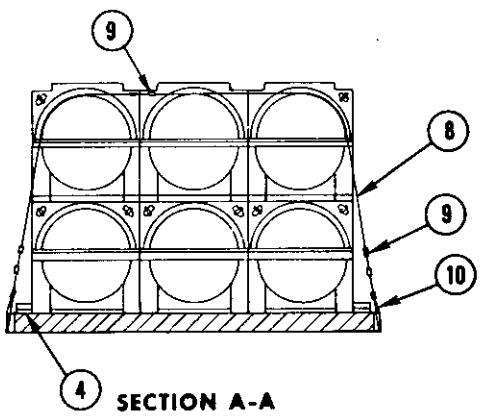

SECTION A-A

PIECE NO.	DESCRIPTION	SIZE	NO. PCS. REQ'D	NAIL TO	NUMBER NAILS	SIZE
10	STAKE POCKET PAD (STRAPPING)	2 X .050 X 24	16	SEE LOAD STRAPPING, PAGE 7		
9	SEAL	FOR 2 IN. STRAP	64	-	-	-
8	TIE DOWN STRAP	2 X .050 X 26 FT.	8	SEE LOAD STRAPPING, PAGE 7		
7	CROSS STRAP	1 1/4 X .035 X 21 FT 8 IN.	4	-	-	-
6	SEAL	FOR 1 1/4 STRAP	16	-	-	-
5	UNITIZING STRAP	1 1/4X.035X16 FT	12	SEE PAGE 6		
4	SLEEPER	2 X 4 X 24	16	SEE FIELD NOTE		
3	CROSS MEMBER	2 X 6 X 90	2	SEE FIELD NOTE		
2	CROSS MEMBER	2 X 6 X 90	4	SEE FIELD NOTE		
1	END CLEAT	2 X 6 X 28	16	SEE FIELD NOTE		

LIST OF MATERIAL & NAILING DATA

FTL 40 FT TRAILER (FLATBED)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LTL 40 FT TRAILER (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE I AND POSITION CONTAINERS ON THE TRAILER ACCORDINGLY.
2. ALL STACKS OF TWO (2) HIGH BY THREE (3) WIDE CONTAINERS SHALL BE SECURED TO THE TRAILER WITH FOUR (4) STRAPS. THOSE STACKS OF TWO (2) HIGH BY TWO (2) WIDE CONTAINERS SHALL BE SECURED WITH THREE (3) STRAPS. ALL OTHER STACKS REQUIRE TWO (2) STRAPS. CHAINS AND PROTECTOR BOARDS MAY BE SUBSTITUTED FOR TIE DOWN STRAPS ON A ONE-FOR-ONE BASIS.
3. THE LTL SHOWN ON PAGE 5 IS FOR EIGHT CONTAINERS AND SHOWS CORRECT BLOCKING, BRACING AND TIE DOWNS FOR A TRUCKLOAD OF THIS QUANTITY.
4. THE LTL PLAN SHOWN ON PAGE 5 DOES NOT LIMIT SHIPMENTS TO THIS QUANTITY. IT IS INTENDED TO EXPLAIN THE CORRECT METHODS OF LOADING LTL SHIPMENTS.


TABLE I


* LOAD PATTERN

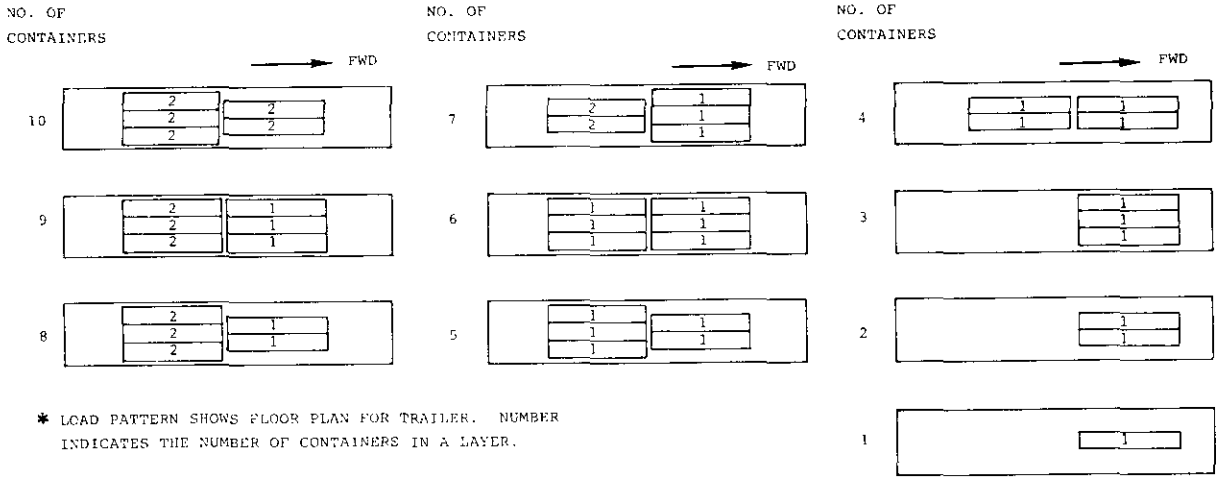

* LOAD PATTERN SHOWS FLOOR PLAN FOR TRAILER. NUMBER INDICATES THE NUMBER OF CONTAINERS IN A LAYER.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

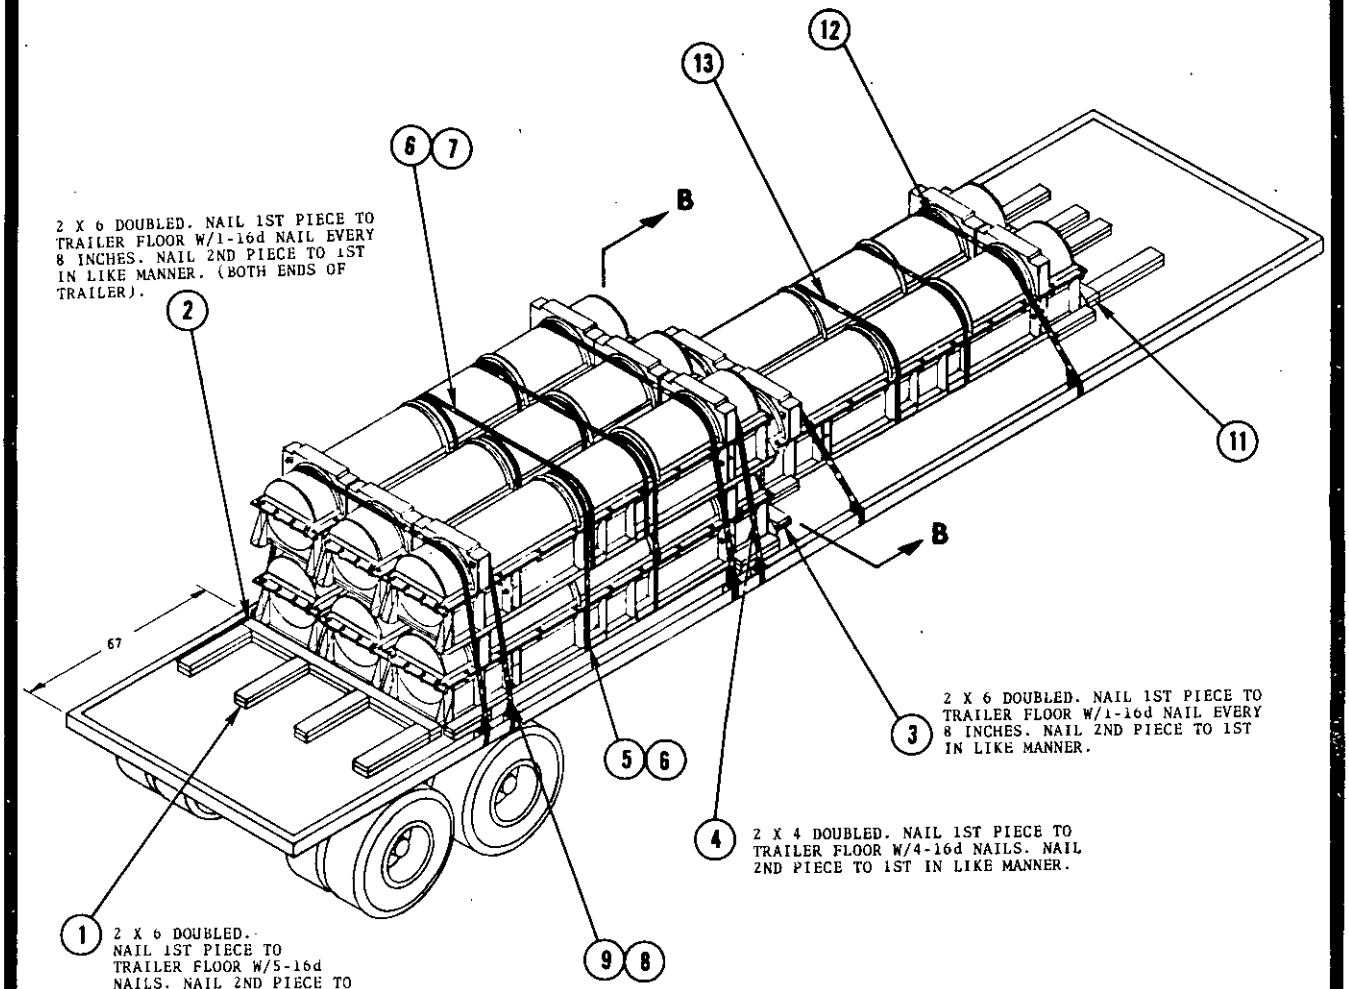

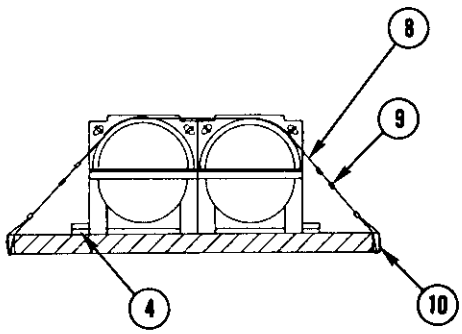

SECTION B-B


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
2	13	CROSS STRAP		1 1/4X .035X 14FT6
2	12	TIE DOWN STRAP	SEE LOAD STRAPPING PG 7	2 X .050 X 17FT
2	11	CROSS MEMBER	SEE FIELD NOTE	2 X 6 X 60
12	10	STAKE POCKET PAD (STRAPPING)	SEE LOAD STRAPPING PG 7	2 X .050 X 24
48	9	SEAL		FOR 2 IN STRAP
4	8	TIE DOWN STRAP	SEE LOAD STRAPPING PG 7	2X .050 X 29 FT
2	7	CROSS STRAP		1 1/4X.035X 20FT6
10	6	SEAL		FOR 1 1/4 STRAP
6	5	UNITIZING STRAP	SEE PG 6	1 1/4X .035 X 16FT
16	4	SLEEPER	SEE FIELD NOTE	2 X 4 X 24
2	3	CROSS MEMBER	SEE FIELD NOTE	2 X 6 X 90
2	2	CROSS MEMBER	SEE FIELD NOTE	2 X 6 X 90
16	1	END CLEAT	SEE FIELD NOTE	2 X 6 X 28

LIST OF MATERIALS

LTL 40 FT TRAILER (FLATBED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

UNITIZING AND HANDLING

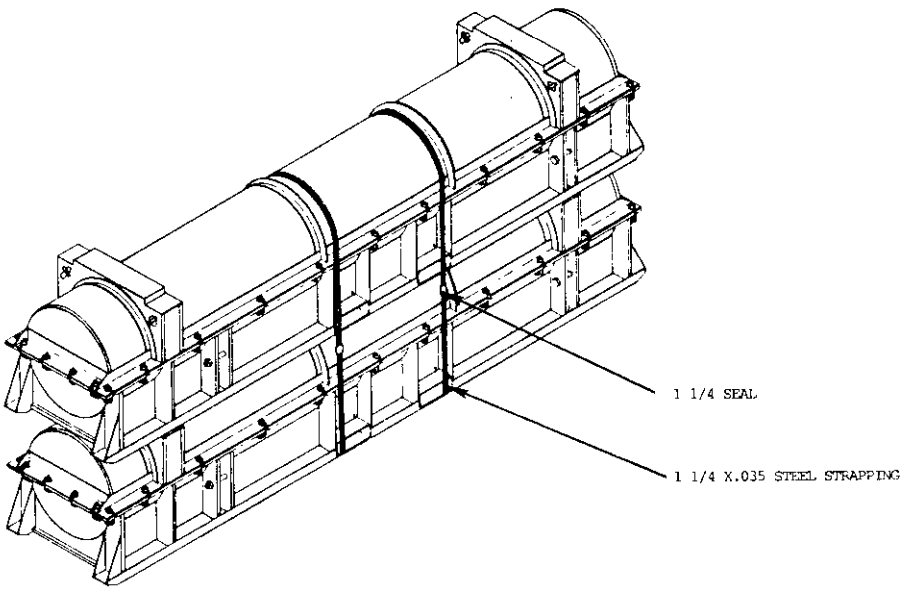

CONTAINER UNITIZING AND BANDING PROCEDURE:

1. PLACE TWO OR MORE PIECES OF LUMBER CROSSWISE ON FLOOR OR GROUND NEXT TO MISSILE CONTAINER.
2. USING FORK LIFT TRUCK OR AN APPROPRIATE HOISTING DEVICE EQUIPPED WITH MK 77 MOD 3 HOISTING SLING, STACK TWO CONTAINERS ON THE LUMBER PIECES.
3. BE CERTAIN THAT NESTING FEATURES AND BEARING SURFACES ARE PROPERLY POSITIONED TO PREVENT SHIFTING IN LATERAL AND LONGITUDINAL DIRECTIONS.
4. SECURE BOTTOM CONTAINERS TO TOP CONTAINER WITH TWO STRAPS POSITIONED AS INDICATED ABOVE.
5. TENSION AND DOUBLE NOTCH THE SEALS.

CONTAINER HANDLING PROCEDURE:


1. UNITIZED CONTAINER MK 687 MOD 0 FOR MK 67 MINE ARE HANDLED AND POSITIONED ON FLATBED TRAILERS WITH A SUITABLE FORK LIFT TRUCK. IF NECESSARY CONTAINERS CAN BE LOADED ONE AT A TIME USING AN APPROPRIATE HOISTING DEVICE EQUIPPED WITH MK 77 MOD 3 HOISTING SLING, AND UNITIZED IN POSITION.


WARNING

TO AVOID TOPPLING, SPECIAL CARE SHOULD BE TAKEN WHEN MOVING STACKS OF CONTAINERS. THE UNITIZING OF THE CONTAINERS IS AUTHORIZED AS PART OF THE TRUCKLOADING PROCEDURE ONLY. UNITIZING IS TO ENSURE CONTINUOUS ENGAGEMENT OF THE STACKING FEATURES AND MOVEMENT OF UNITIZED CONTAINERS SHOULD BE LIMITED TO THAT NECESSARY TO LOAD AND UNLOAD THE FLATBED TRAILER. CONTAINERS SHALL BE DEUNITIZED AFTER UNLOADING THE VEHICLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LOAD STRAPPING

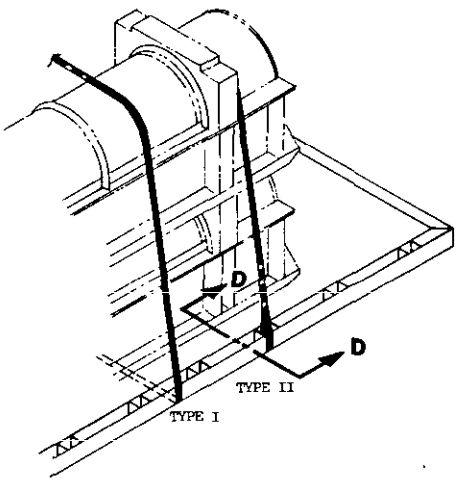

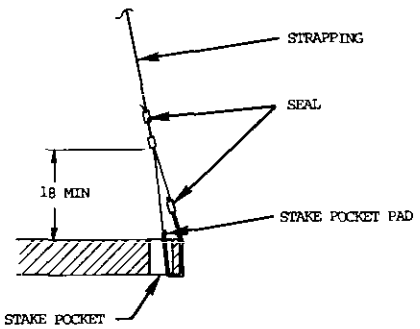

SECTION D-D

THE FOLLOWING TWO METHODS OF TIE-DOWN STRAPPING ARE APPROVED FOR USE WITH THE SHIPMENT OF LOADS ON FLATBED TRAILERS. STEEL STRAPPING SHALL BE IN *ACCORDANCE WITH MIL-STD-1320. STRAPPING SEALS SHALL HAVE A MINIMUM* TENSILE STRENGTH EQUAL TO 75 PERCENT OF THE STRAP STRENGTH. FOR EACH OF THE TYPES ILLUSTRATED ABOVE IT IS PREFERRED TO POSITION, TENSION AND DOUBLE CRIMP THE STRAP SEALS AT THE TOP OF THE LOAD.

TYPE I - CONTINUOUS STRAPPING AROUND THE FLATBED AND THE LOAD.

TYPE II- THE STRAPPING IS SECURED TO THE STAKE POCKETS, ONE PIECE ON EACH SIDE OF THE TRAILER, AND IS BROUGHT UP OVER THE LOAD, TENSIONED, AND SEALED WITH THE DOUBLE-CRIMPED SEALS ON THE TOP. METHOD OF SECURING STRAPPING TO STAKE POCKET IS SHOWN IN SECTION D-D. *THE SHORT END IS ON THE INSIDE AND IS SECURED* WITH TWO DOUBLE-CRIMPED SEALS AT A MINIMUM OF 18 INCHES ABOVE THE TRAILER BED. A STAKE POCKET PAD (A SHORT PIECE OF THE SAME STRAPPING 18 INCHES LONG) IS INSERTED BETWEEN THE MAIN STRAP AND THE STAKE POCKET AND IS SECURED TO THE MAIN STRAP WITH A SEAL AS SHOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.