MIL-STD-1320-220
(NAVY)

31 JANUARY 1986


MILITARY STANDARD


TRUCKLOADING
MINE UNDERWATER MK 67 MOD 2 (SLMM)
BODY, MAIN ASSEMBLY, MK 4 MOD 0
IN CONTAINER MK 640 MOD 0

UNIT LOAD DATA

DIMENSIONS ..... 120 3/8 L X 29 5/16 W X 30 1/4 H
STACKING HEIGHT 29 1/4
GROSS WT ..... 1504 LBS △
DOT HAZARD CLASSIFICATION ..... NONE
CONTAINER DRAWING NO. ..... PL 5003260

△ DO NOT USE FOR SHIPPING WEIGHT

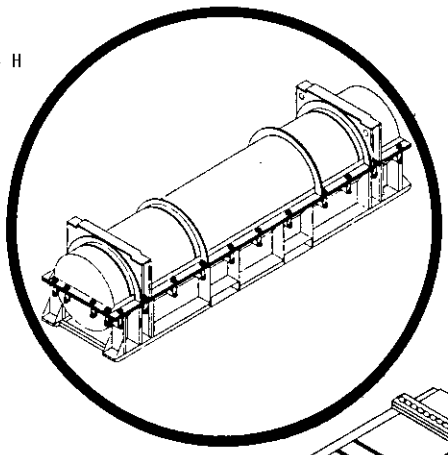

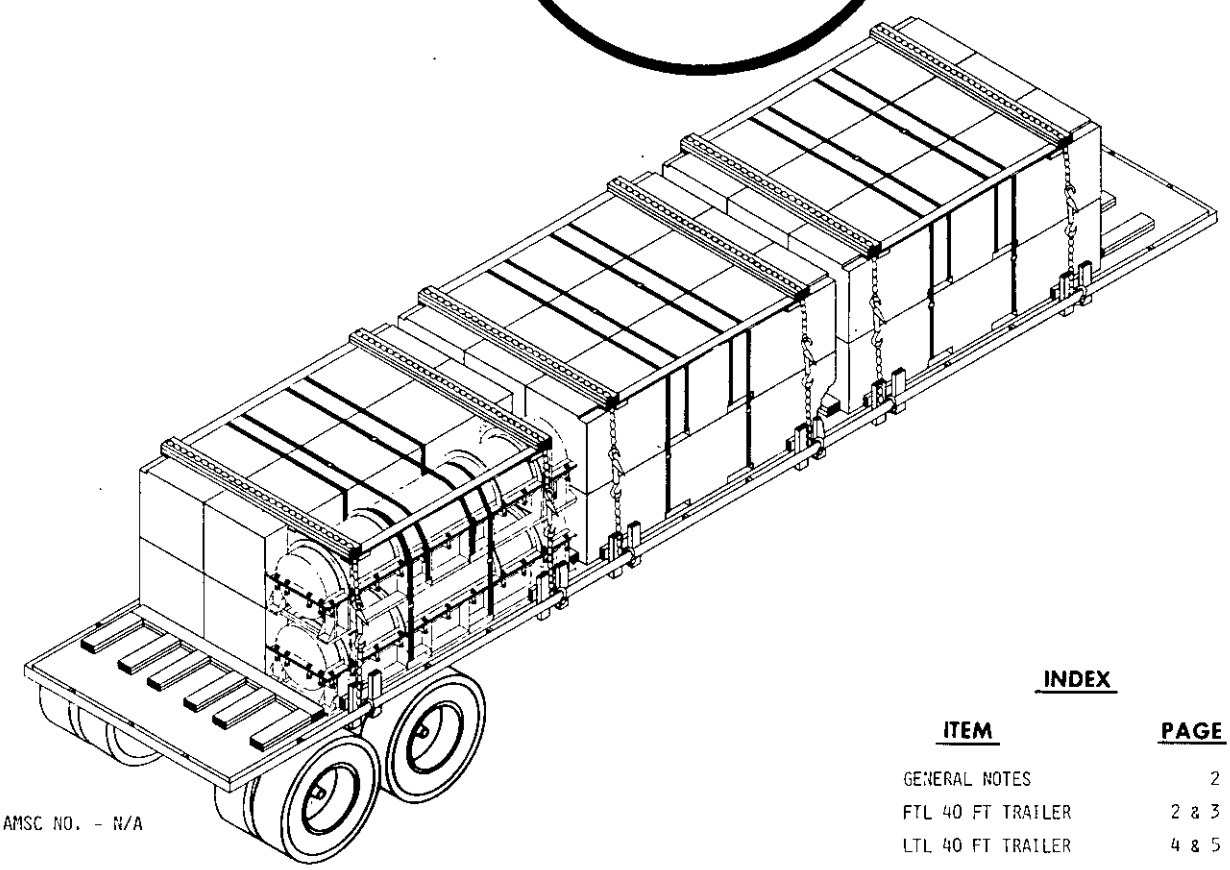

AMSC NO. - N/A

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40 FT TRAILER	2 & 3
LTL 40 FT TRAILER	4 & 5
DETAILS	6

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK 236(NAVY).

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

W B Gray NWHC 1/31/86
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J E O'Kelly 2/21/86
SIGNATURE SEASYCOM / BY DIRECTION DATE

ORIGINATOR William A. Schneider 1/31/86
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:48Z
Check the source to verify that this is the current version before use.


GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING BODY, MAIN ASSEMBLY FOR MK 67 MINE IN MK 640 CONTAINER.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT FLATBED TRAILERS. THE TRAILER AXLES SHALL BE LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER).
3. WHEN REQUIRED TO SHIP CONTAINERS TWO HIGH, THEY SHALL BE STACKED AND STRAPPED TOGETHER AS SPECIFIED IN THE CONTAINER UNITIZING DETAIL ON PAGE 7.
4. CHAINS AND STEEL STRAPS MAY BE USED INTERCHANGEABLY FOR TIEDOWNS ON A 1 TO 1 BASIS.
5. STEEL STRAPS USED FOR TIEDOWNS SHALL BE 2 X .050 AND SHALL BE APPLIED AS SPECIFIED AS SHOWN IN THIS DOCUMENT AND THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).
6. CHAINS, FITTINGS AND LOAD BINDERS SHALL MEET THE REQUIREMENTS OF AND BE APPLIED AS SPECIFIED BY THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY) AND THE REQUIREMENTS OF THIS DOCUMENT.
7. PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOADBINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOADBINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOADBINDER.
8. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
9. APPLICABLE MATERIAL SPECIFICATIONS: DUNNAGE LUMBER, MM-L-75; NAILS, FF-N-105, TYPE II STYLE 10, COMMON BRIGHT.
10. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

FTL 40 FT AND LONGER TRAILER (FLATBED)

1. A FULL TRUCKLOAD CONSISTS OF 18 CONTAINERS, SHIPMENT OF CONTAINERS OF MINES IS LIMITED TO TWO HIGH DUE TO THE STACKING CHARACTERISTICS OF THE MK 640 CONTAINER. SEE DETAIL **A**
2. THE SUGGESTED LOADING SEQUENCE IS:
   - A. LOAD REAR STACK OF CONTAINERS APPROXIMATELY 50* INCHES FROM THE AFT END OF TRAILER.
   - B. INSTALL REAR CROSSMEMBER
   - C. LOAD MIDDLE STACK OF CONTAINERS
   - D. INSTALL FRONT CROSSMEMBER
   - E. LOAD FRONT STACK OF CONTAINERS
   - F. INSTALL FORWARD AND REAR FLOOR BLOCKING, SLEEPERS AND TIEDOWNS.
   - G. APPLY AND SECURE TARPAULINS.

* 50 INCHES FOR 40 FT TRAILER
62 INCHES FOR 42 FT TRAILER
74 INCHES FOR 44 FT TRAILER
80 INCHES FOR 45 FT TRAILER
96 INCHES FOR 48 FT TRAILER

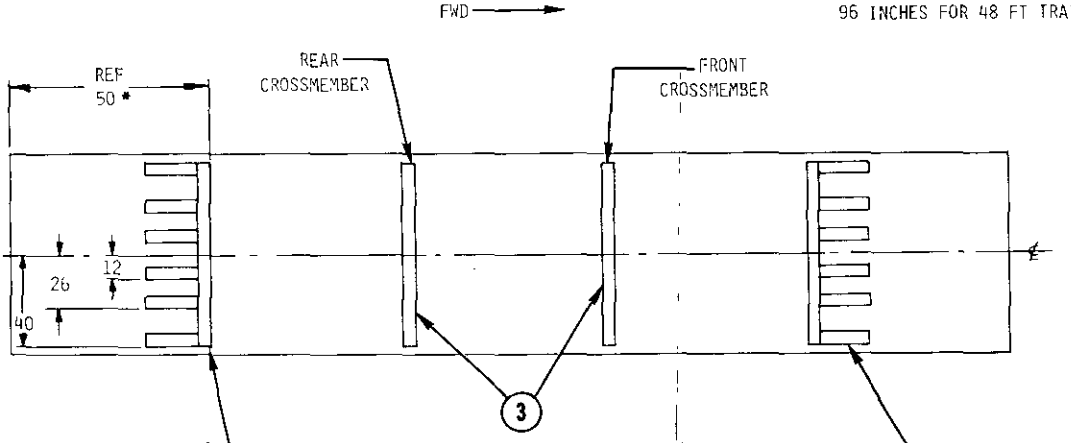


2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST IN LIKE MANNER. (1)

2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST IN LIKE MANNER. (3)

2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/4-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER (2)

DETAIL A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

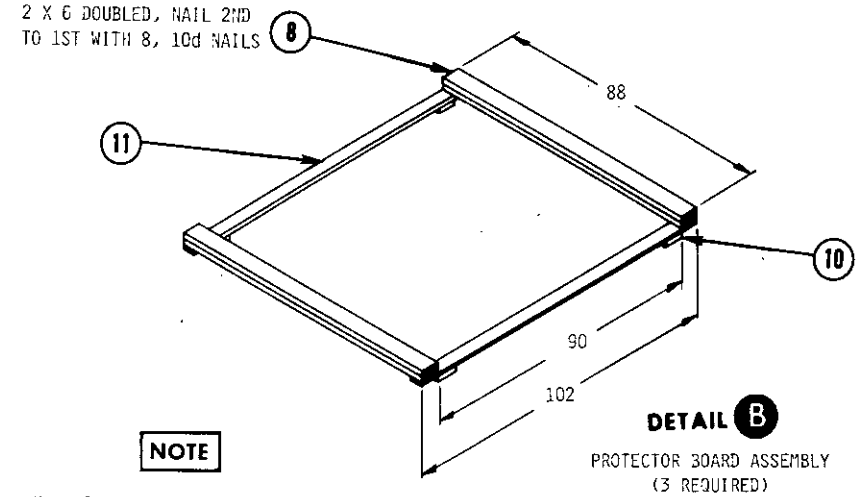

NOTE

NAIL 2 X 4 X 6 TO JOINT 1 X 4 X 102 W/3-6d NAILS. THEN NAIL ASSEMBLY TO 2 X 6 X 88 W/3-8d NAILS PER JOINT.

DETAIL B


PROTECTOR BOARD ASSEMBLY
(3 REQUIRED)

NOTE

THIS FTL ILLUSTRATES THE USE OF CHAINS AS TIEDOWNS. 2 X .050 STEEL STRAPS ARE AN AUTHORIZED ALTERNATE.

NOTE:


TARPAULINS OMITTED FOR CLARITY

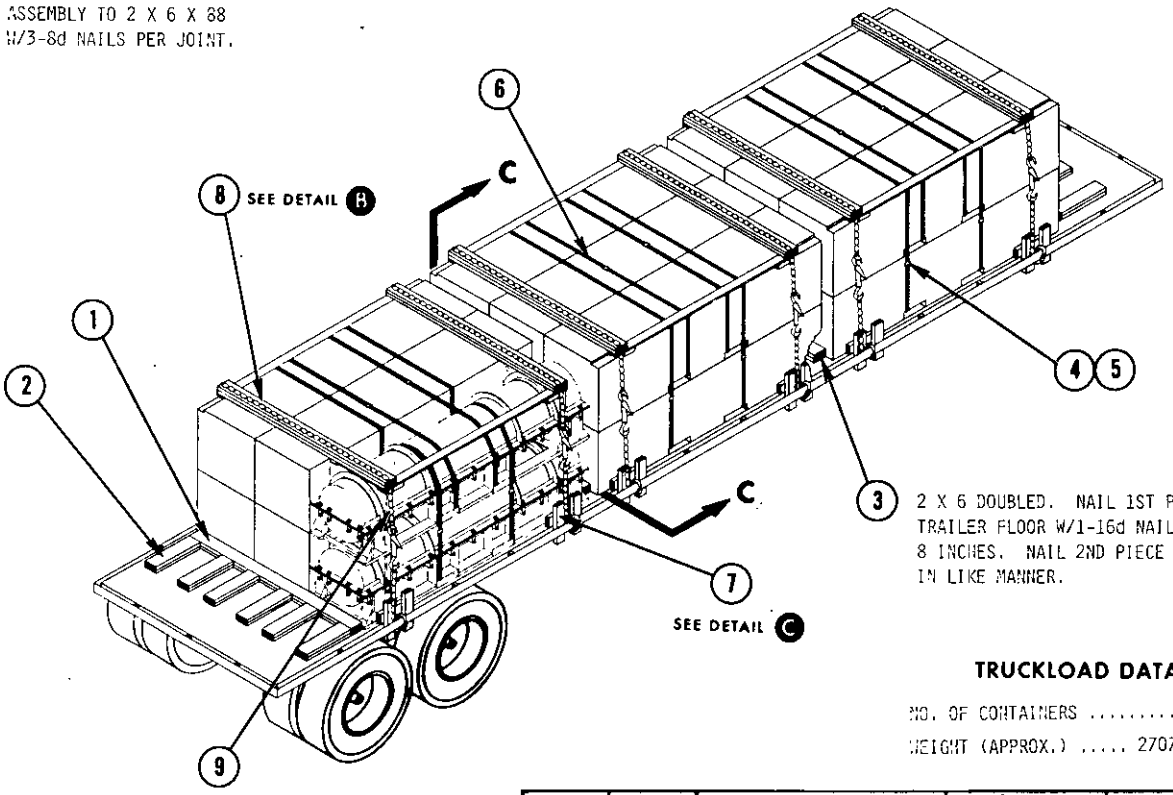

3 — 2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

TRUCKLOAD DATA

NO. OF CONTAINERS 18
WEIGHT (APPROX.) ..... 27072 LBS.

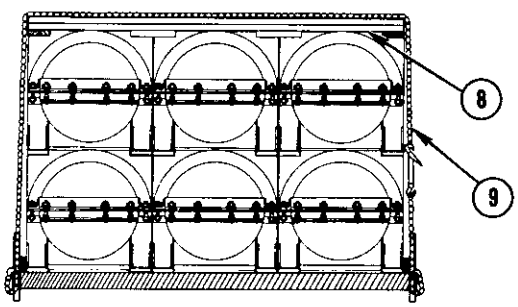

SECTION C-C

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
6	11	TIE PIECE	SEE DETAIL B	1 X 4 X 102
12	10	RETAINING BLOCK	SEE DETAIL B	2 X 4 X 6
6	9	CHAIN & BINDER	-	5/16 OR 3/8
12	8	PROTECTOR BOARD	-	2 X 6 X 88
4 PER STK	7	SLEEPER	SEE DETAIL C	-
6	6	CROSS STRAP	-	1 1/4X .035X 21 FT
24	5	SEAL	-	FOR 1 1/4 STRAP
18	4	UNITIZING STRAP	-	1 1/4X .035X 16 FT
4	3	CROSSMEMBER	SEE FIELD NOTE	2 X 6 X 88
24	2	BACKUP CLEAT	SEE DETAIL A	2 X 6 X 24
4	1	CROSSMEMBER	SEE DETAIL A	2 X 6 X 88


LIST OF MATERIALS

Source: https://assist.dla.mil/online/revalidate/ 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LTL 40 FT TRAILER (FLATBED)

1. WHEN REQUIRED TO SHIP LESS THAN A FULL TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FROM TABLE 1. POSITION THE CONTAINERS ON THE TRAILER USING THIS PATTERN.
2. THE LTL PATTERNS SHOWN FOR 11, 13, 14, 15, AND 16 CONTAINERS REQUIRE BLOCKING AS SHOWN IN DETAIL A, PAGE 2. WHEN CONTAINERS ARE TWO ACROSS, MODIFY BLOCKING ACCORDINGLY. BLOCK AND TIEDOWN CONTAINERS USING THE PRINCIPLES SHOWN ON PAGE 3 AND FTL NOTES ON PAGE 2.
3. THE LTL PATTERN SHOWN FOR 12, 10, 9, 8 & 7 CONTAINERS REQUIRES THE FORWARD STACK TO BE POSITIONED 15 INCHES FROM THE FRONT OF THE TRAILER. BLOCK AND TIEDOWN CONTAINERS USING THE PRINCIPLES SHOWN ON PAGE 3 AND 5.
4. THE LTL PATTERN SHOWN FOR 6 OR LESS CONTAINERS REQUIRES THE FORWARD STACK TO BE POSITIONED 48 INCHES FROM THE FRONT OF THE TRAILER. BLOCK AND TIEDOWN CONTAINERS USING THE PRINCIPLES SHOWN ON PAGE 5.
5. THE LTL ON PAGE 5 IS FOR 5 CONTAINERS. LTL SHIPMENTS ARE NOT LIMITED TO THIS QUANTITY. ACTUAL SHIPPING REQUIREMENTS WILL DETERMINE THE NUMBER OF CONTAINERS TO BE SHIPPED ON A TRAILER AND THEY SHOULD BE BLOCKED AND TIED DOWN IN ACCORDANCE WITH APPROPRIATE PARTS OF THIS STANDARD.

TABLE I
LOAD PATTERN *

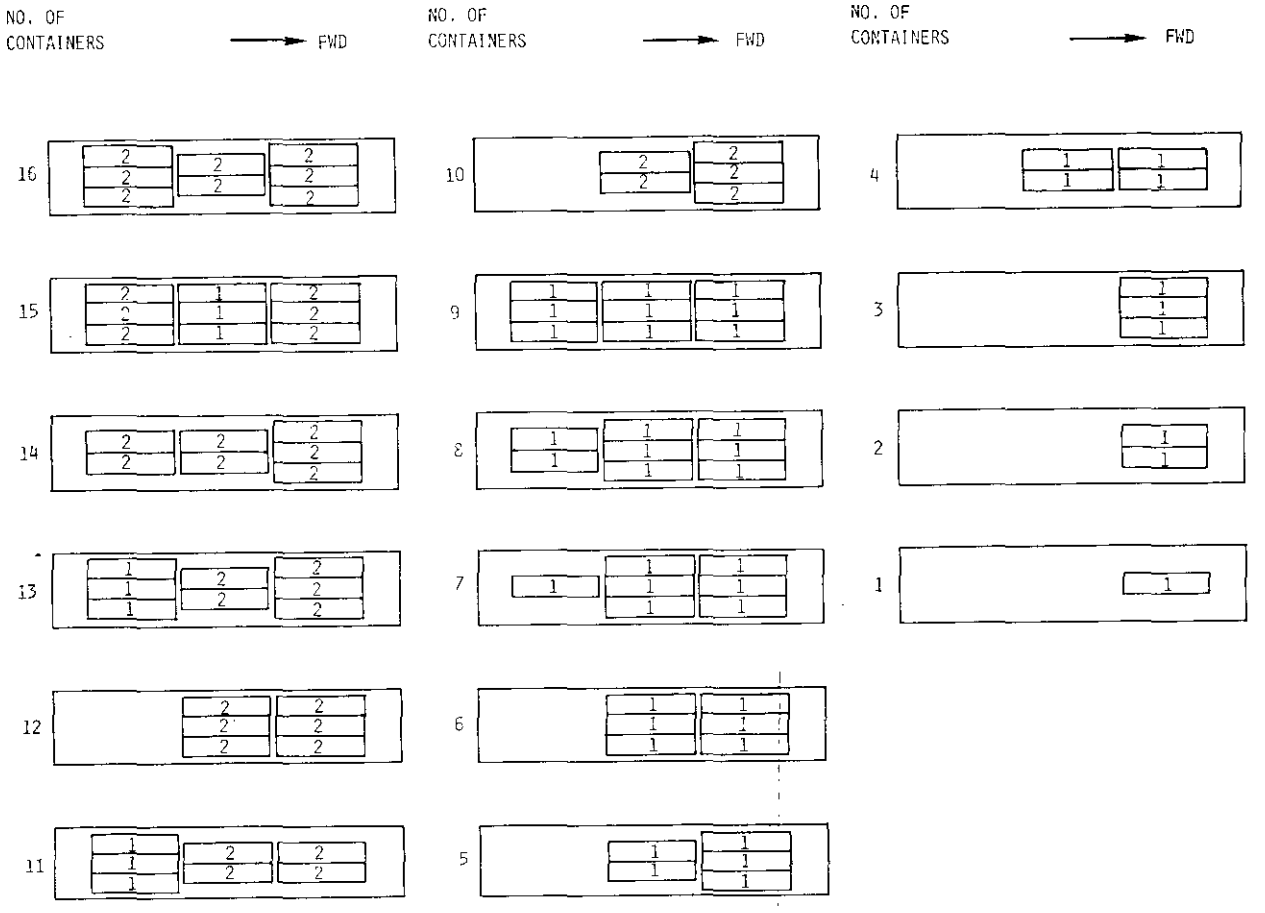


* LOAD PATTERN IS THE FLOOR PLAN FOR THE LOAD. THE NUMBER IN THE BLOCKS IS THE NUMBER OF CONTAINERS IN THE LAYER OF THE STACK.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

1. STUB STAKE IS SIZED TO FIT STAKE POCKET AND CUT TO EXTEND APPROXIMATELY 9 INCHES ABOVE TRAILER FLOOR AND 3 INCHES BELOW STAKE POCKET. DRIVE ONE 20d NAIL BELOW STAKE POCKET ALLOWING ONE INCH TO PROTRUDE TO PREVENT STAKE FROM WORKING OUT OF PLACE.
2. THICKNESS OF FILLER SHALL BE SUFFICIENT TO FILL SPACE BETWEEN STAKE AND CONTAINER SKIDS. IT MAY BE COMPOSED OF ONE OR MORE PIECES. WHEN TWO OR MORE PIECES ARE USED, THEY SHALL BE LAMINATED TOGETHER.


NOTE

THIS LOAD ILLUSTRATES THE USE OF 2 X .050 STEEL STRAPS AS TIEDOWNS. CHAIN AND LOADBINDERS ARE AN AUTHORIZED ALTERNATE.

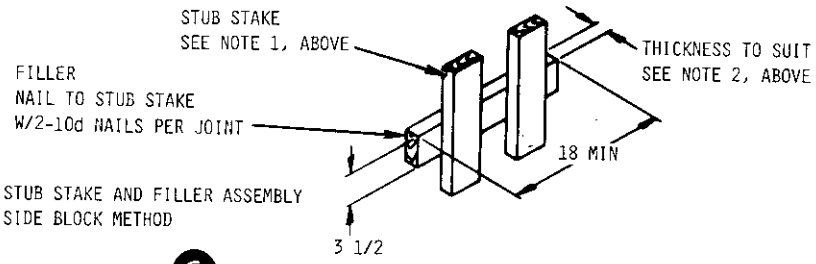

STUB STAKE AND FILLER ASSEMBLY
SIDE BLOCK METHOD


DETAIL C

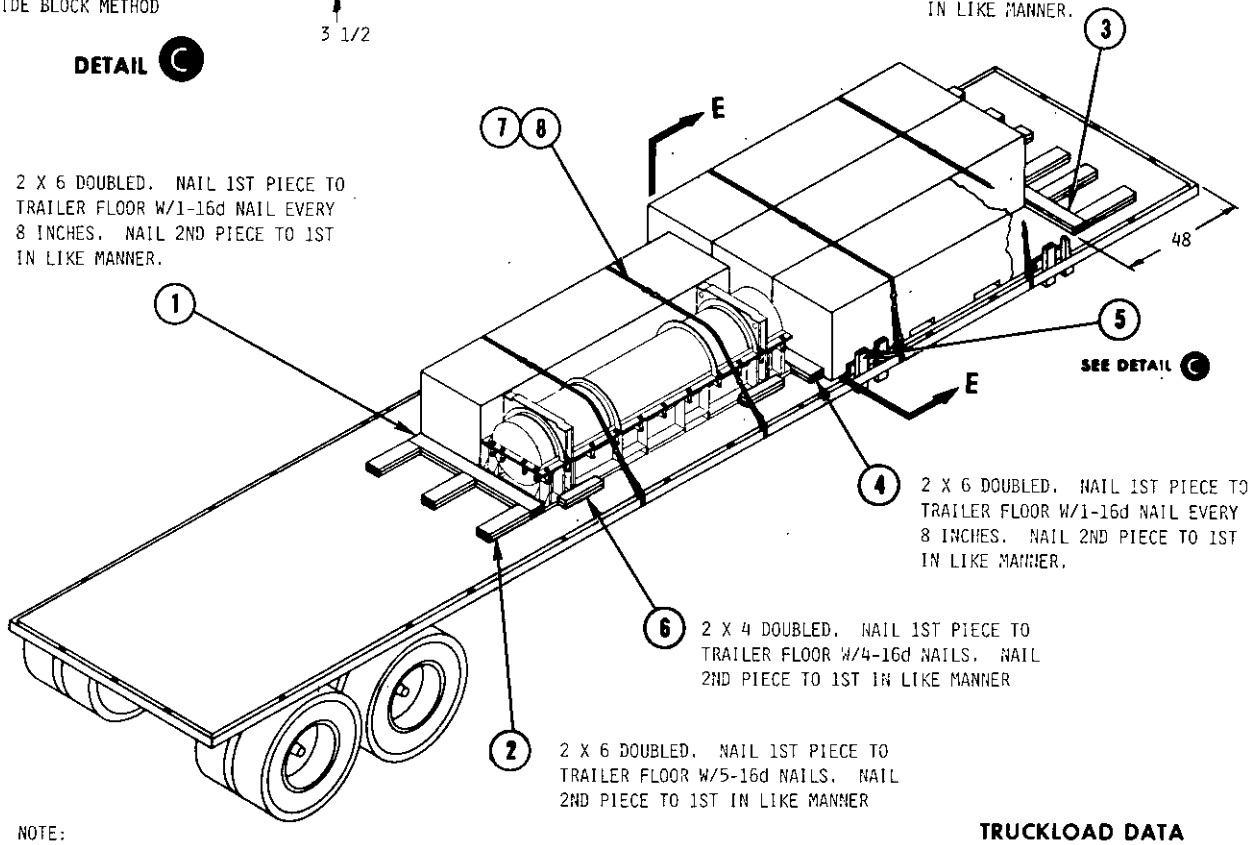

NOTE:
TARPAULINS OMITTED FOR CLARITY

TRUCKLOAD DATA

NUMBER OF CONTAINERS 5
WEIGHT (APPROX) ..... 7520 LBS.

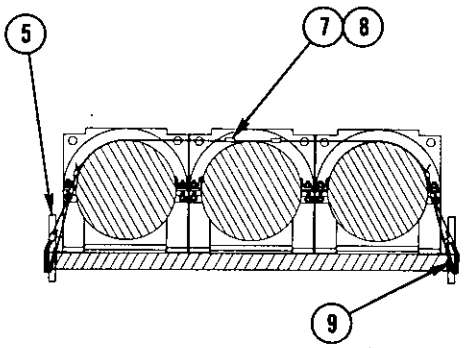

SECTION E-E


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
8	9	PAD (STRAP)	-	2 X .050 X 18
32	8	SEAL	-	FOR 2 INCH STRAP
4	7	STRAP	-	2X .050 X 18 FT 6
8	6	SLEEPER	SEE FIELD NOTE	2 X 4 X 18
4 PER STK	5	SLEEPER	SEE DETAIL C	-
2	4	CROSSMEMBER	SEE FIELD NOTE	2 X 6 X 88
2	3	CROSSMEMBER	SEE FIELD NOTE	2 X 6 X 88
18	2	BACKUP CLEAT	SEE FIELD NOTE	2 X 6 X 20
2	1	CROSSMEMBER	SEE FIELD NOTE	2 X 6 X 60

LIST OF MATERIALS

TYPICAL LTL (SINGLE LAYER) 40 FT AND LONGER TRAILER (FLATBED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

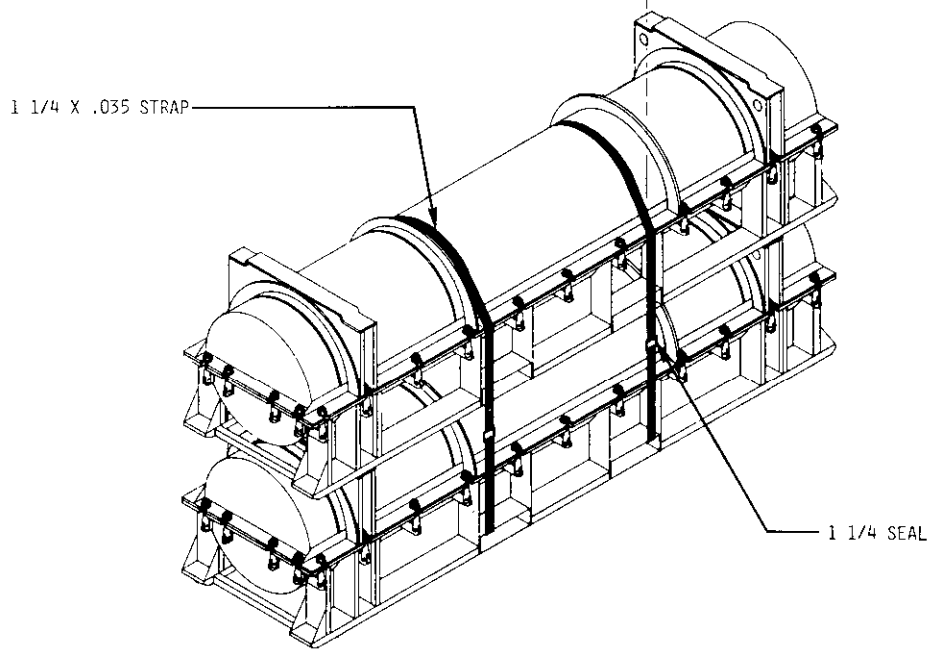

CONTAINER UNITIZING PROCEDURE

1. STACK TWO CONTAINERS USING A FORK LIFT TRUCK.
2. BE CERTAIN THAT THE NESTING FEATURES AND BEARING SURFACES ARE PROPERLY POSITIONED TO PREVENT SHIFTING IN LATERAL AND LONGITUDINAL DIRECTIONS.
3. SECURE BOTTOM CONTAINER TO TOP CONTAINER WITH TWO 1 1/4 X .035 STEEL STRAPS POSITIONED AS INDICATED ABOVE.
4. AFTER TENSIONING STRAPS, SEAL WITH ONE DOUBLE NOTCHED SEAL.

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED CONTAINERS, EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD CONTAINERS AND CONTAINERS IN THE OUTER ROWS. CONTAINERS SHALL BE DEUNITIZED AFTER UNLOADING THE VEHICLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.