MILITARY STANDARD


MIL-STD-1320-231
(NAVY)
24 August 1990

TRUCKLOADING


GUIDED MISSILE, AGM-136A (TACIT RAINBOW)
IN SHIPPING AND STORAGE CONTAINER, CNU-432/E
UNIT LOAD FOR UNDERWAY REPLENISHMENT

UNIT LOAD DATA

UNIT LOAD DOCUMENT MIL-STD-1323-342
DIMENSIONS . . . . 111 1/4 L X 25 1/4 W X 59 1/4 H
GROSS WEIGHT . . . . . 1705 LBS Δ
CUBE . . . . . 96.3 CU FT
Δ DO NOT USE FOR SHIPPING WEIGHT

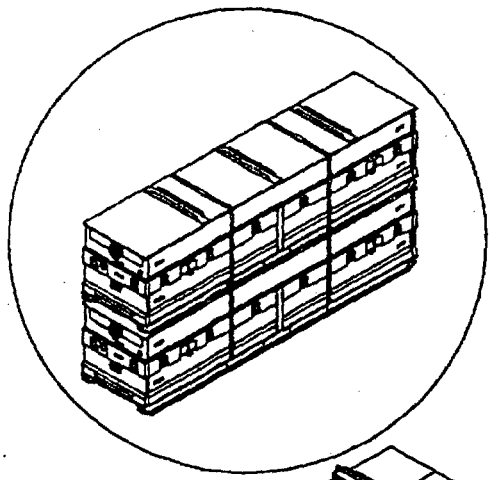

HAZARD CLASSIFICATION		
DODIC/NALC	ITEM NAME	DOT
PE37	AGM-136A	CLASS A

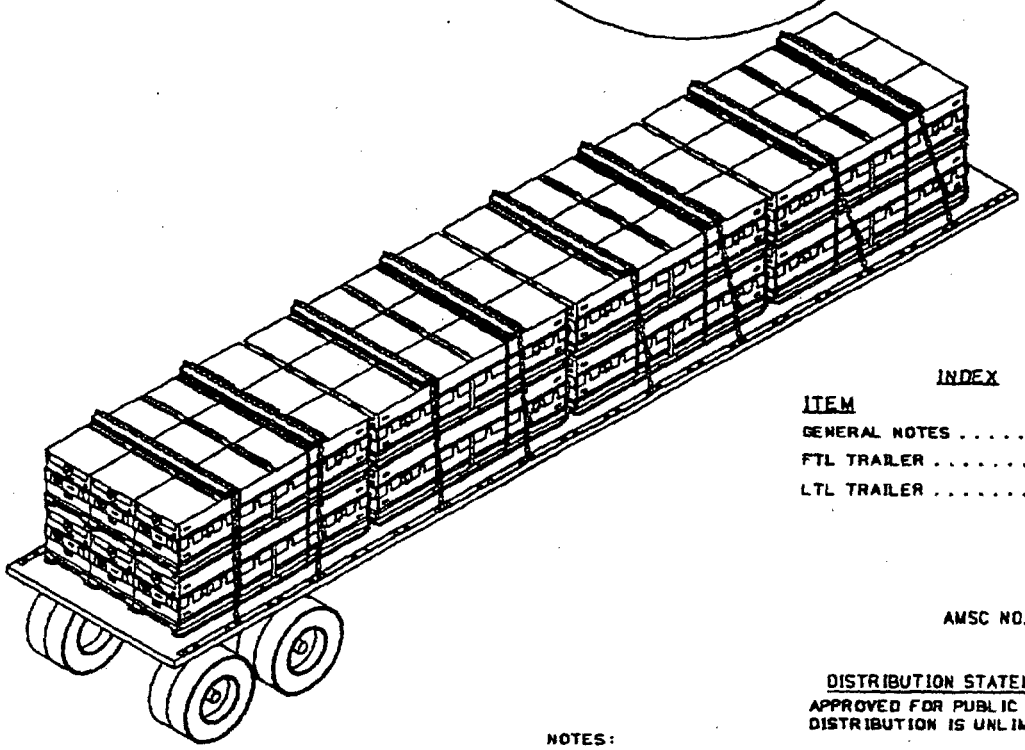

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	2 & 3
LTL TRAILER	4 & 5

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY.

E. Linder — 8/22/90
SIGNATURE — TDA, WPNSTA EARLE — DATE

K. Valenza — 8/24/90
SIGNATURE — AIRSYSCOM BY DIRECTION — DATE

ORIGINATOR — A Bender — 8/15/90 DATE


WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING UNIT LOADS FOR UNDERWAY REPLENISHMENT OF GUIDED MISSILE, AGM-136A (TACIT RAINBOW) IN CONTAINER, CNU-432/E, WHEN THE CONTAINERS ARE UNITIZED IN ACCORDANCE WITH MIL-STD-1323-342 (NAVY).
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 FT THROUGH 48 FT FLATBED TRAILERS. DO NOT USE TRAILERS WITH METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE TO ONE BASIS FOR TIE DOWNS.
4. STEEL STRAPPING USED AS TIE DOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY) EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIE DOWNS. WHEN USING STEEL STRAPPING, THE STRAPS SHALL BE STAPLED TO THE PROTECTOR BOARD USING 2 INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10 d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIE DOWN.
7. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION, REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
8. UNLESS OTHERWISE SPECIFIED DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
9. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
10. AFTER THE BLOCKING, BRACING AND TIE DOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT WATERPROOF TARPAULINS. THE TARPAULINS MAY BE UNDER THE TIE DOWNS.
11. AFTER THE TARPAULINS ARE IN PLACE, ATTACH "EXPLOSIVES A" PLACARDS TO BOTH SIDES, FRONT AND BACK OF THE TRAILER AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSABLE AREA ON THE BACK DECK OF THE TRAILER.
12. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

FTL 40 FT THROUGH 48 FT TRAILER (FLATBED)

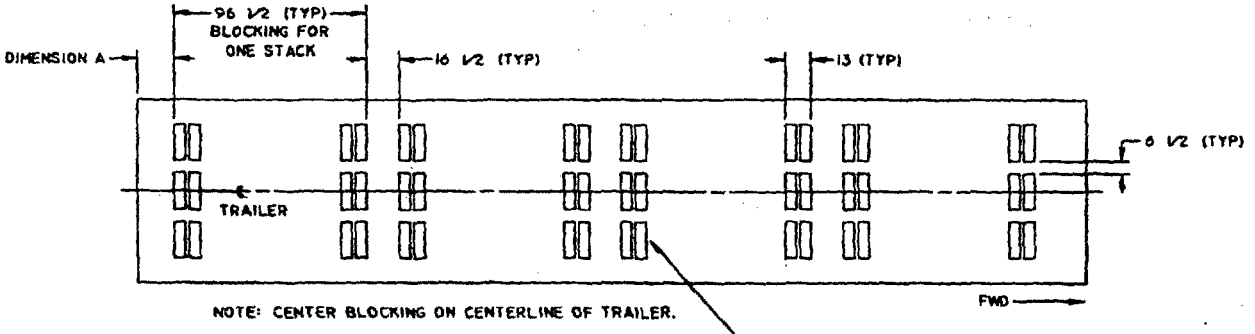

TRAILER LENGTH	DIMENSION A
40 FT	20
42 FT	36
44 FT	48
45 FT	54
48 FT	74

(1) 2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/4-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

DETAIL (A)

PREPOSITIONED FLOOR BLOCKING FOR 40 FT THROUGH 48 FT TRAILERS (40 FT TRAILER SHOWN)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

NOTE

TARPAULINS OVER CONTAINERS OMITTED FOR CLARITY.

NOTE

DIRECTION OF ARROW INDICATES FORWARD END OF CONTAINER

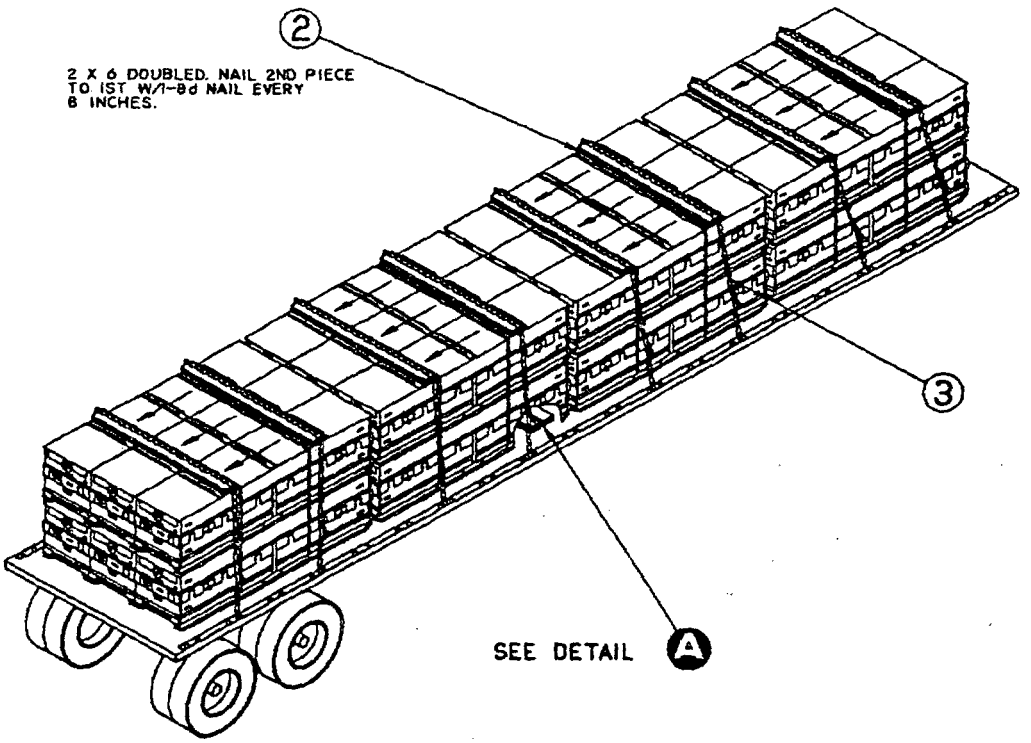

TRUCKLOAD DATA

NUMBER OF UNIT LOADS 12

WEIGHT . . . . . 20460 LBS Δ

Δ DO NOT USE FOR SHIPPING WEIGHT

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
8	3	CHAIN AND LOAD BINDER	SEE NOTE 5 ON PAGE 2	5/16 OR 3/8
16	2	PROTECTOR BOARD	SEE NOTE 6 ON PAGE 2	2 X 6 X 75 3/4
96	1	PREPOSITIONED CROSSMEMBER	SEE NOTE 8 ON PAGE 2	2 X 6 X 19

LIST OF MATERIALS

FTL 40 FT THROUGH 48 FT TRAILER (FLATBED)
(40 FT TRAILER SHOWN)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LTL 40 FT THROUGH 48 FT TRAILERS (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN, FOR THE NUMBER OF UNIT LOADS TO BE SHIPPED, FROM TABLE I.
2. POSITION UNIT LOADS ON THE TRAILER AS SHOWN IN TABLE I. BLOCK AND TIE DOWN USING THE PRINCIPLES SHOWN ON PAGES 3 AND 5 AND THE GENERAL DOCUMENT MIL-STD-1320 (NAVY).
3. THE LTL PLAN ON PAGE 5 SHOWS THE LESS-THAN-TRUCKLOAD METHODS FOR STACKS OF ONE AND TWO UNIT LOADS. FOR STACKS OF THREE UNIT LOADS, SEE PAGE 3.
4. WHEN USING LOAD PATTERNS WITH 1 OR 2 UNIT LOADS WIDE, CENTER THE PREPOSITIONED BLOCKING AND UNIT LOADS ON THE CENTER LINE OF THE TRAILER.

TABLE I

LOAD PATTERN *

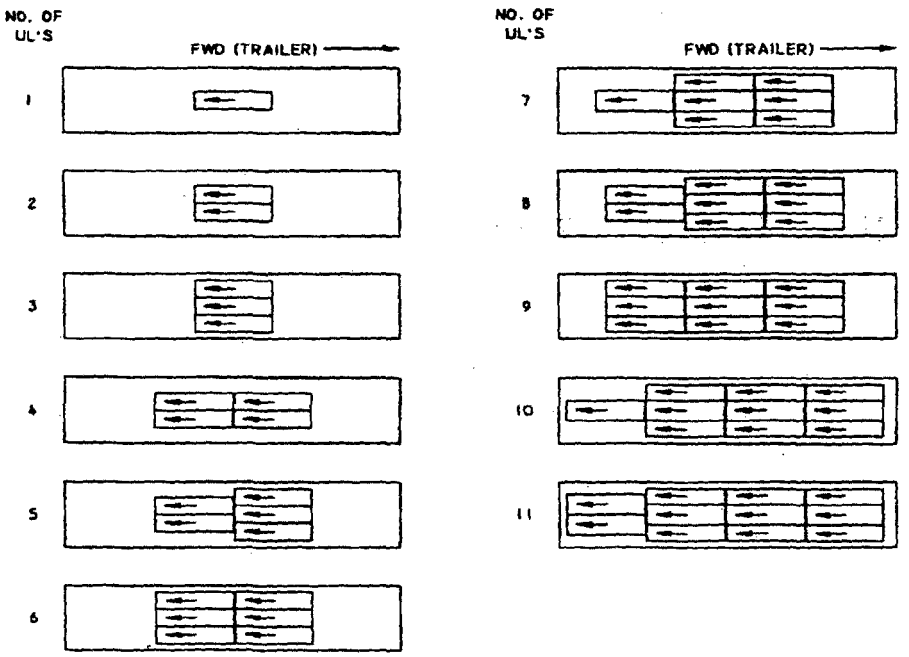

* LOAD PLAN SHOWS FLOOR PLAN FOR TRAILER.
ARROWS INDICATE FORWARD END OF CONTAINER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.


TYPICAL CONSTRUCTION FOR STACKS OF ONE AND TWO UNIT LOADS

NOTE

TARPAULINS OVER CONTAINER OMITTED FOR CLARITY

NOTE

DIRECTION OF ARROW INDICATES FORWARD END OF CONTAINER

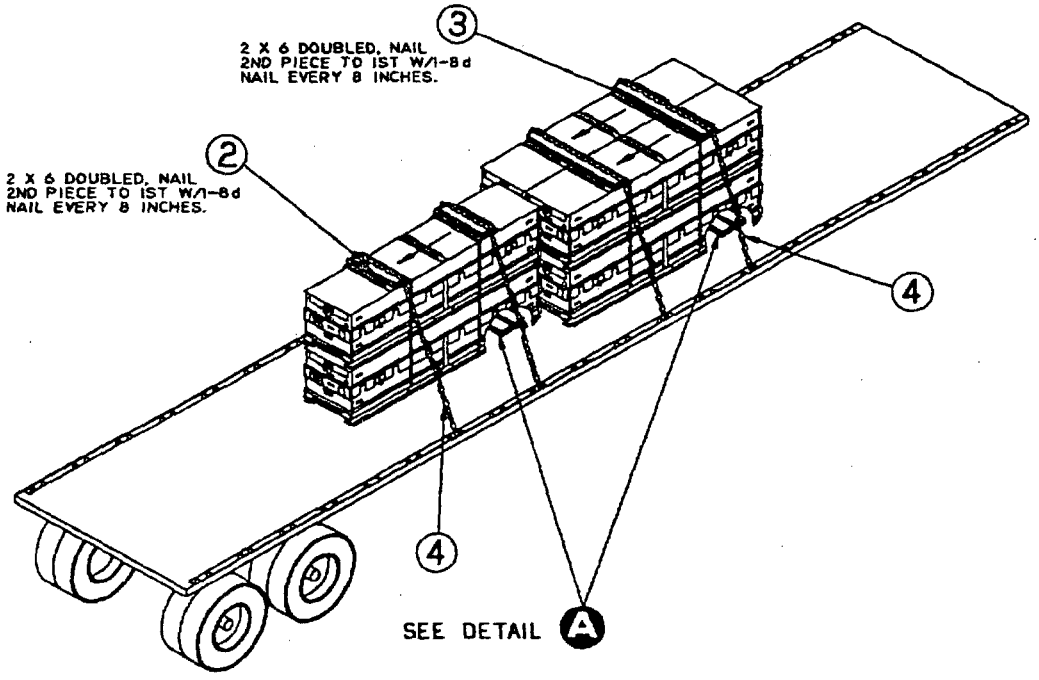

LIST OF MATERIALS

2 UL'S REQ'D	1 UL REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
2	2	4	CHAIN AND LOAD BINDER	SEE NOTE 5 PAGE 2	5/16 OR 3/8
4	--	3	PROTECTOR BOARD	SEE NOTE 6 PAGE 2	2 X 6 X 50 1/2
--	4	2	PROTECTOR BOARD	SEE NOTE 6 PAGE 2	2 X 6 X 25 1/4
16	8	1	PREPOSITIONED CROSSMEMBER	SEE NOTE 8 PAGE 2	2 X 6 X 19

REVIEW ACTIVITY:
NAVY-OS, AS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N760)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.