MILITARY STANDARD

MIL-STD-1320-242
(NAVY)
8 JUNE 1989


TRUCKLOADING
STANDARD MISSILE EXTENDED RANGE (ER)
IN SHIPPING AND STORAGE CONTAINER MK 721 MOD 0

CONTAINER DATA


DODIC/NALC (SEE MIL-HDBK-236)
CONTAINER DATA LIST..... DL 5167728
DIMENSIONS..... 178-1/2 L X 26 W X 31 H
GROSS WEIGHT (MAXIMUM)..... 1925 LBS△
TARE WEIGHT..... 750 LBS△
CUBE..... 83.2 CU FT

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
6 CONTAINERS HIGH IN STORAGE.

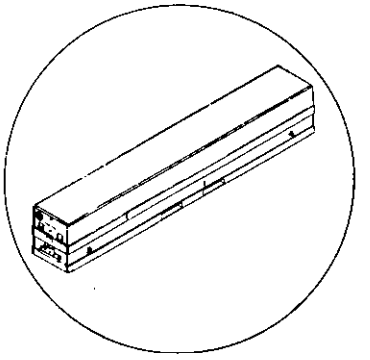

DWG NO. 53711-5167728

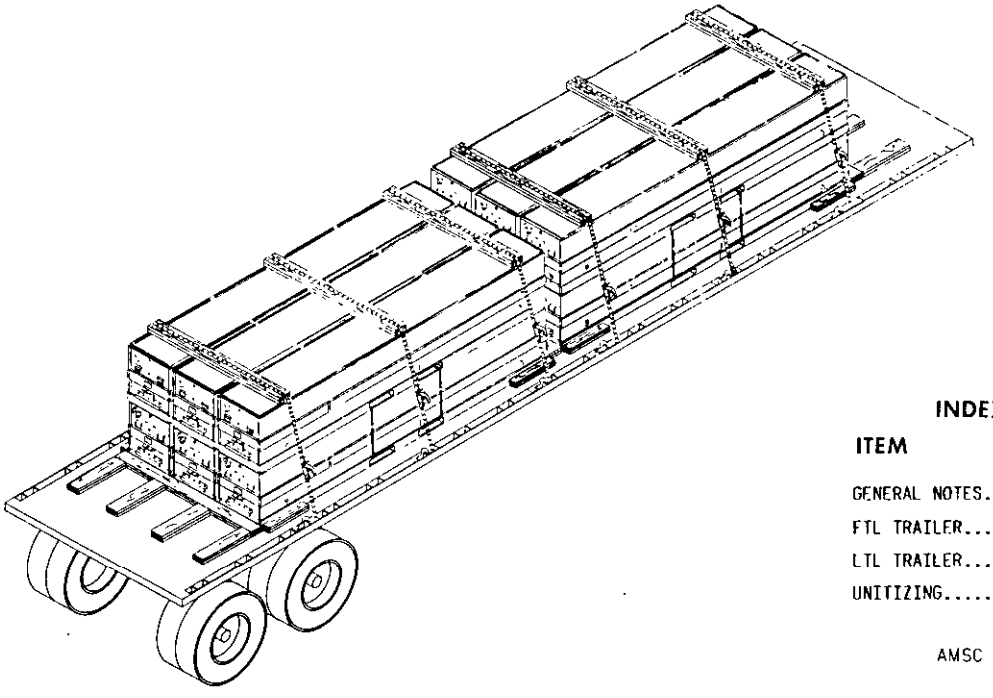

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	3
LTL TRAILER	4
UNITIZING	6

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY.

C Lewis 6/7/89
SIGNATURE TDA, WPNSTA EARLE DATE

SIGNATURE NAVSEASYSCOM BY DIRECTION 6-8-89 DATE

ORIGINATOR A W Kuchno 7 JUNE 89
DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23123:49Z
Check the source to verify that this is the current version before use.


GENERAL NOTES


1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING STANDARD MISSILE (EXTENDED RANGE) IN SHIPPING AND STORAGE CONTAINER, MK 721 MOD 0.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 FT THROUGH 48 FT FLATBED TRAILERS WITH THE TRAILER'S TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE-TO-ONE BASIS FOR TIE DOWNS.
4. STEEL STRAPPING USED AS TIE DOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS, AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY) EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIE DOWNS WHEN USING STEEL STRAPPING. THE STRAPS SHALL BE STAPLED TO THE PROTECTOR BOARD USING 2-INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIE DOWN.
7. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS, AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS, AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
8. UNLESS OTHERWISE SPECIFIED, DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS, AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
9. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR TRAILER WILL NOT EXCEED THESE LIMITATIONS.
10. AFTER THE BLOCKING, BRACING, AND TIE DOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT, WATERPROOF TARPAULINS. THE TARPAULINS MAY BE UNDER THE TIE DOWNS.
11. AFTER THE TARPAULINS ARE IN PLACE, ATTACH "EXPLOSIVES" PLACARDS AS APPLICABLE TO BOTH SIDES, FRONT, AND BACK OF THE TRAILER AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.
12. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

NOTE

TARPAULINS OVER CONTAINERS OMITTED FOR CLARITY.

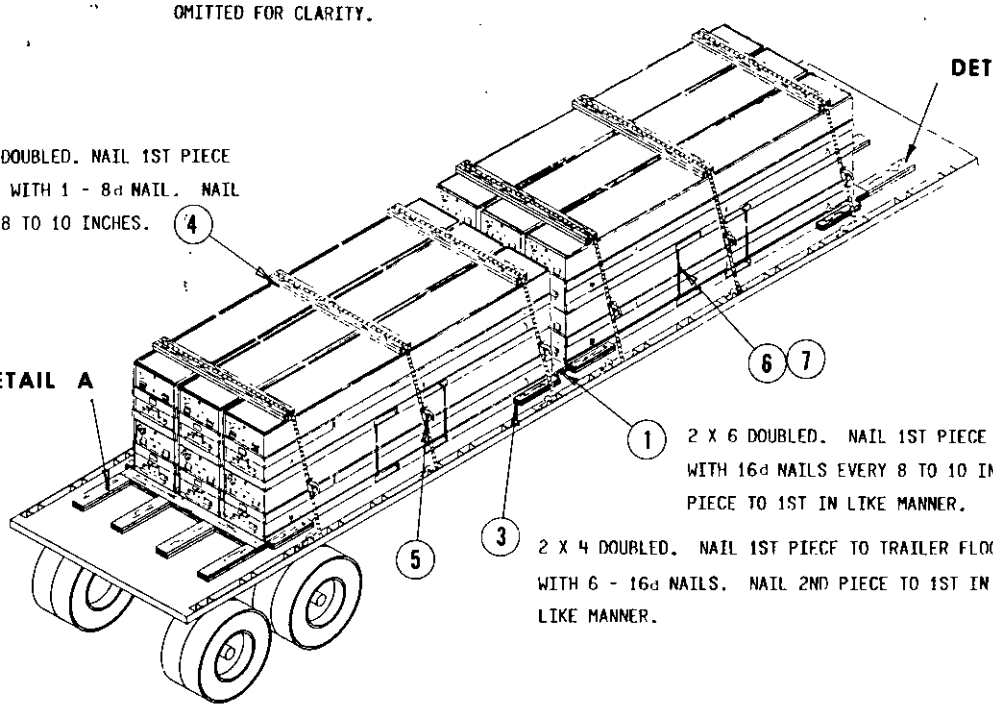

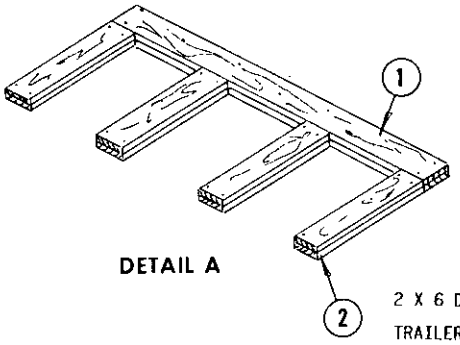

TRUCK LOAD DATA

40 THROUGH 48 FT TRAILER

NUMBER OF CONTAINERS..... 12

FTL WEIGHT..... 22,200 LBS

DO NOT USE FOR SHIPPING WEIGHT

FTL 40 FT THROUGH 48 FT TRAILER (FLATBED)
(40 FT TRAILER SHOWN)

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
12	7	SEAL	SEE NOTE 8, PAGE 2	1-1/4
12	6	STEEL STRAP	SEE NOTE 8, PAGE 2	1-1/4 X .035 X 11 FT
6	5	CHAIN & LOAD BINDER	SEE NOTE 5, PAGE 2	5/16 OR 3/8
12	4	PROTECTOR BOARD	SEE NOTE 6 & 8, PAGE 2	2 X 6 X 78
16	3	SLEEPER	SEE NOTE 8, PAGE 2	2 X 4 X 24
16	2	BACKUP CLEAT	SEE NOTE 8, PAGE 2	2 X 6 X 30
6	1	CROSSMEMBER	SEE NOTE 8, PAGE 2	2 X 6 X 84


LIST OF MATERIALS


Source: https://assist.dla.mil - Downloaded: 2025-11-28 16:34:02
Check the source to verify that this is the current version before use.

LTL 40 FT LONGER TRAILERS (FLATBED)


1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF UNIT LOADS TO BE SHIPPED FROM TABLE I.
2. POSITION UNIT LOADS ON THE TRAILER AS SHOWN IN TABLE I. BLOCK AND TIE DOWN USING THE PRINCIPLES SHOWN ON THIS PAGE AND PAGES 3 AND 5 AND THE GENERAL DOCUMENT, MIL-STD-1320 (NAVY).
3. THE NUMBERS IN EACH ROW OF A STACK IS THE NUMBER OF CONTAINERS STACKED IN THE ROW. LOAD PATTERN 11 REQUIRES THE USE OF DETAIL C AS SHOWN IN DETAIL B.
4. SEE DETAIL D FOR BLOCKING AND BRACING VARIATIONS FOR LTL.
5. FOR UNITIZING, SEE DETAIL E, PAGE 6.

TABLE I

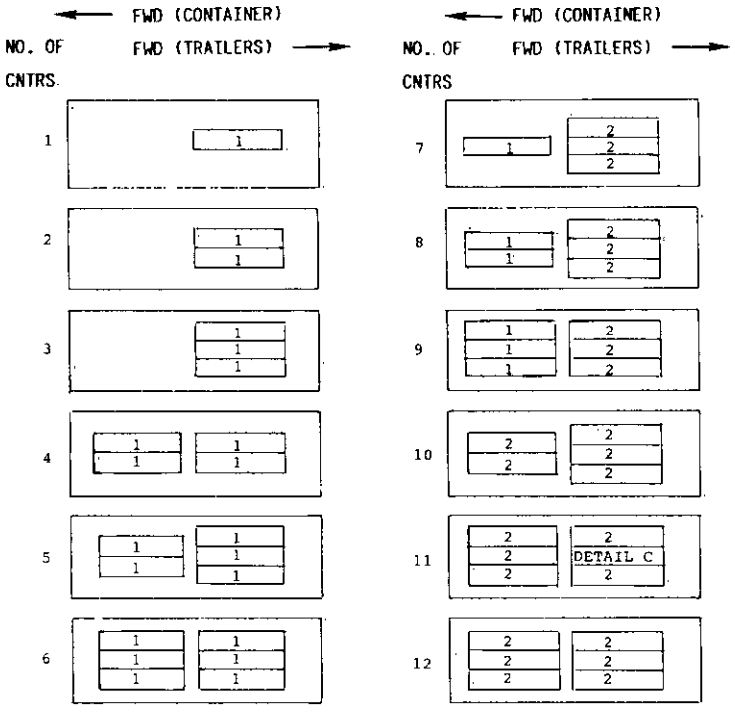

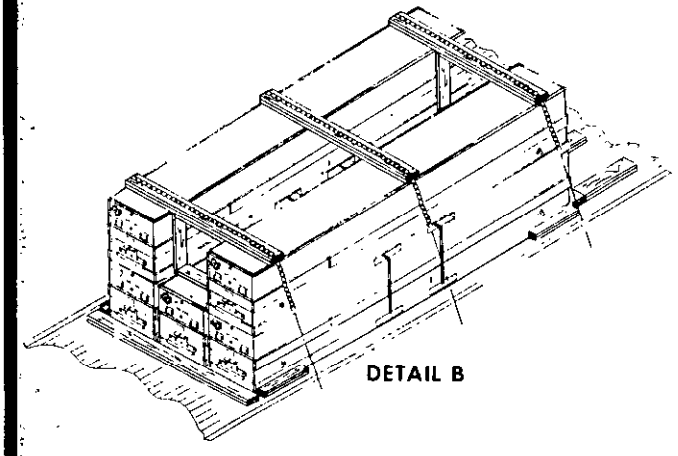

DETAIL B



DETAIL C

NAIL 1ST PIECE TO 2ND PIECE WITH 8d NAILS EVERY 8 TO 10 INCHES.

NAIL TOP PIECE TO ITEM 10 WITH 7 - 10d NAILS.

NAIL TO ITEM 8 WITH 3 - 8d NAILS PER JOINT.

FWD END SHOWN (5 CONTAINERS) USE SPACER DETAIL C. BLOCKING AND BRACING UNCHANGED.

LIST OF MATERIALS


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	10	PROTECTOR BOARD	SEE NOTE 8, PAGE 2	2 X 6 X 78
4	9	VERTICAL	SEE NOTE 8, PAGE 2	2 X 6 X 31
4	8	HORIZONTAL	SEE NOTE 8, PAGE 2	2 X 6 X 22-7/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

DETAIL D


BLOCKING AND BRACING

VARIATIONS FOR LTL

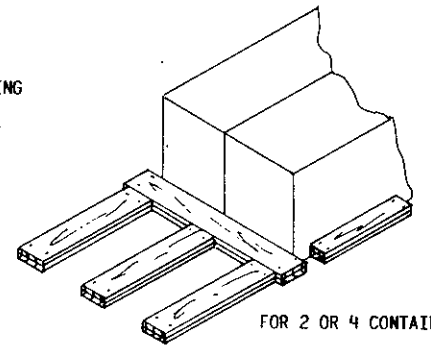


FOR 2 OR 4 CONTAINERS


USED ON FWD OR AFT ENDS

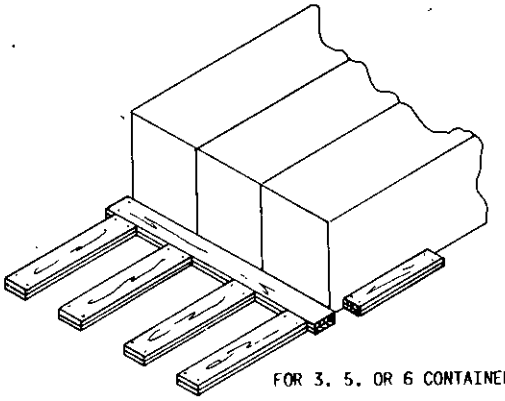


FOR 3, 5, OR 6 CONTAINERS

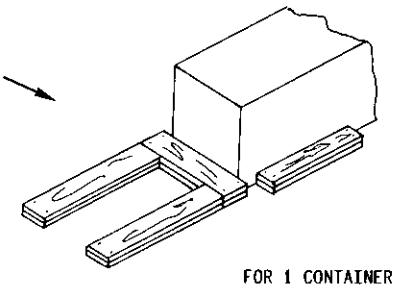

FOR 1 CONTAINER

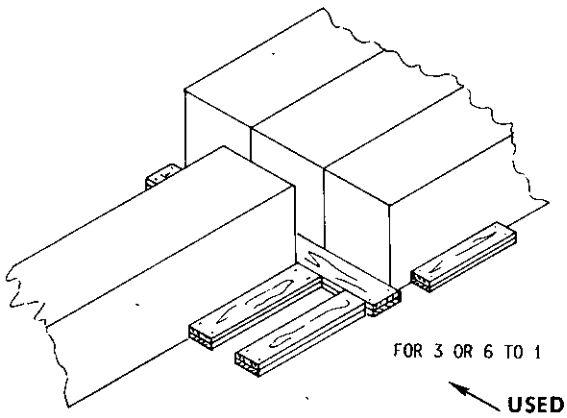

FOR 3 OR 6 TO 1

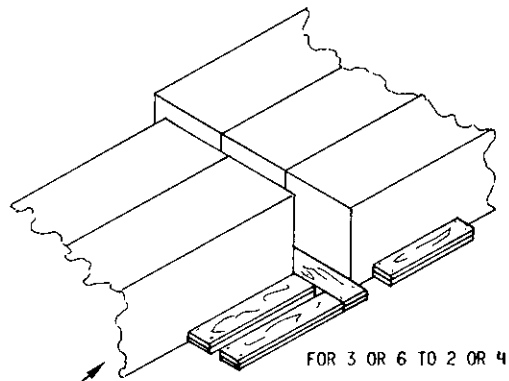

FOR 3 OR 6 TO 2 OR 4

USED ON CENTER OR BETWEEN CONTAINER ROWS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.


UNITIZING PROCEDURE

1. USING A FORK TRUCK, STACK ONE CONTAINER ON TOP OF THE FIRST CONTAINER. BE SURE TO ALIGN THE STACKING FEATURES.
2. POSITION TWO 1-1/4 X .035 STEEL STRAPS THROUGH THE FORK POCKETS OF THE CONTAINERS, AT THE ENDS OF THE POCKETS, AS SHOWN. TENSION AND DOUBLE NOTCH SEAL. (SEE NOTE 8 ON PAGE 2.)

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED CONTAINERS, EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD CONTAINERS.

THE STRAPPING TOGETHER OF CONTAINERS TO FORM A UNIT LOAD OF CONTAINERS TWO (2) HIGH IS AUTHORIZED FOR LOADING AND UNLOADING OF TRAILERS ONLY. ANY MOVEMENT OF THESE LOADS IS LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER.

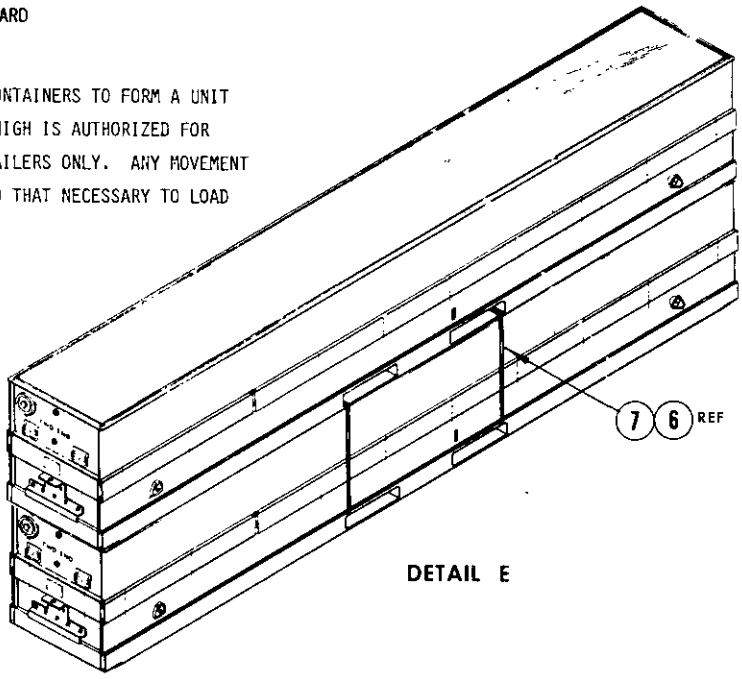

DETAIL E

DEUNITIZING PROCEDURE

1. CUT AND REMOVE STRAPPING HOLDING TOP CONTAINER.
2. REMOVE TOP CONTAINER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE 1989: - 604-033/13844