MILITARY STANDARD

MIL-STD-1320-8 (NAVY)

15 APRIL 1980


TRUCKLOADING

TALOS MISSILE WARHEAD ASSEMBLIES IN CONTAINER MX 286

SUPERSEDING MIL-STD-1320-8 (NAVY) 30 JULY 1964 AND CHANGE 1 22 NOVEMBER 1971

CONTAINER DATA

DIMENSIONS	[illegible] X 12 H
CUBE	[illegible] CU FT
TARE WEIGHT (APPROX)	[illegible] LBS
GROSS WEIGHT (APPROX)	[illegible] LBS
CONTAINER DWG NO	SC 172917
DOT HAZARD CLASSIFICATION	EXPLOSIVES

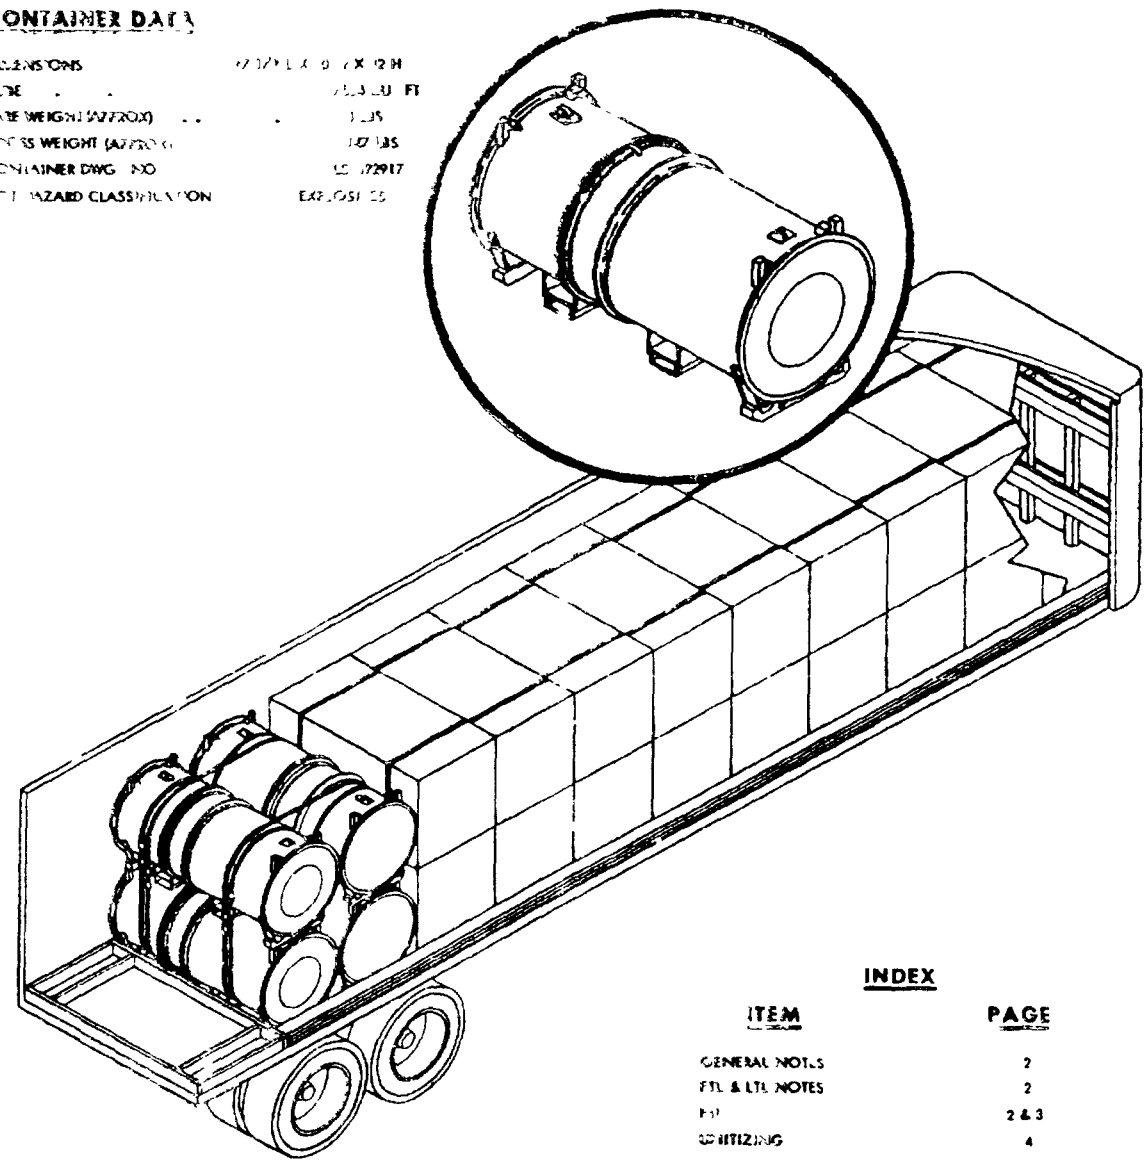

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL & LTL NOTES	2
FTL	2 & 3
PALLETIZING	4

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-[illegible]

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

M.S. Ross NAVHC 3/5/80
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

SIGNATURE NAVSEASYSCOM BY DIRECTION DATE

ORIGINATOR [signature] 3/5/80
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE TALOS WARHEAD ASSEMBLIES IN CONTAINER MK 286
2. PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40, 42, AND 45 FT VAN TRAILERS WITH NAILABLE FLOORS THE TRAILER AXLES SHALL BE LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER)
3. WHEN THE SPACE BETWEEN THE REAR OF THE LADING AND THE TRAILER DOOR IS LESS THAN 36 INCHES, USE THE REAR BLOCKING METHOD SHOWN ON PAGE 3. THE BLOCKING ASSEMBLY MUST BEAR AGAINST LADING AND TRAILER DOORS WHEN DOORS ARE CLOSED


WARNING

DO NOT USE TRAILERS WITH ROLL UP DOORS
WHEN BLOCKING BY THIS METHOD


4. WHEN THE SPACE BETWEEN THE REAR OF THE LADING AND THE TRAILER DOOR IS GREATER THAN 36 INCHES SUBSTITUTE THE REAR BLOCKING, DETAIL D, PAGE 4, FOR THE REAR BLOCKING ASSEMBLY, DETAIL C
5. WHEN CONTAINERS ARE STACKED TWO HIGH THEY SHALL BE UNITIZED AS SHOWN ON PAGE 4
6. WHEN THE CONTAINERS ARE TWO HIGH AT THE REAR OF THE TRAILER (AS SHOWN ON PAGE 3) OR THE LOAD CHANGES FROM CONTAINERS TWO HIGH TO ONE HIGH, (A PARTIAL LAYER) THE REAR TWO STACKS OF TWO HIGH CONTAINERS SHALL BE STRAPPED TOGETHER USING THE PRINCIPLES SHOWN ON PAGE 3
7. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILTY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS
8. AFTER THE BLOCKING AND BRACING HAS BEEN INSPECTED, CLOSE AND SEAL TRAILER DOORS AND ATTACH "EXPLOSIVES A" PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER
9. UNLESS OTHERWISE SPECIFIED, ALL MATERIAL SHALL BE IN ACCORDANCE WITH THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320
10. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320

FTL & LTL 40, 42, & 45 FT TRAILERS (VAN)

1. A FTL FOR A 40 FT TRAILER CONSISTS OF 11 STACKS OF 2 UNITIZED CONTAINERS AS SHOWN ON PAGE 3 A 42 FT TRAILER WILL CONTAIN 12 STACKS (24 CONTAINERS) AND A 45 FT TRAILER 13 STACKS (26 CONTAINERS) BLOCK AND BRACE ALL TRAILERS USING THE PRINCIPLES SHOWN ON PAGE 3
2. WHEN SHIPPING LTL, DECREASE THE NUMBER OF CONTAINERS IN THE SECOND LAYER BEFORE DECREASING THE CONTAINERS IN THE FIRST LAYER BLOCK LTL'S USING THE PRINCIPLES OF THE FTL ON PAGE 3 AND MODIFIED AS REQUIRED BY GENERAL NOTES 4 AND 6
3. "DOUBLES" MAY BE USED IN THOSE STATES PERMITTING DOUBLES BLOCKING SHALL BE IN ACCORDANCE WITH THE PRINCIPLES OF THIS DOCUMENT

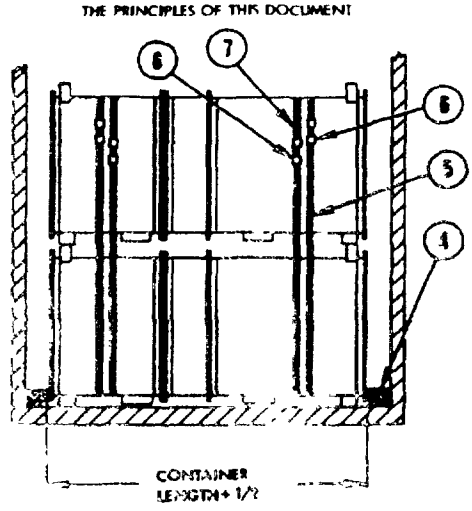


SECTION A-A

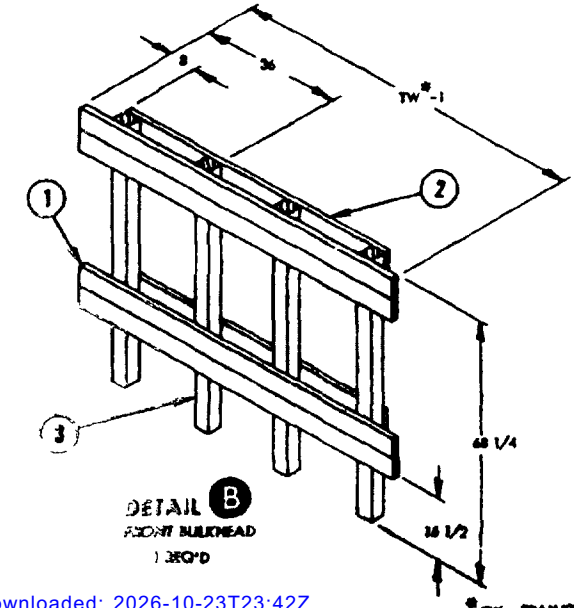

DETAIL B
FRONT BULKHEAD
REQ'D


* TW = TRAILER WIDTH

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.

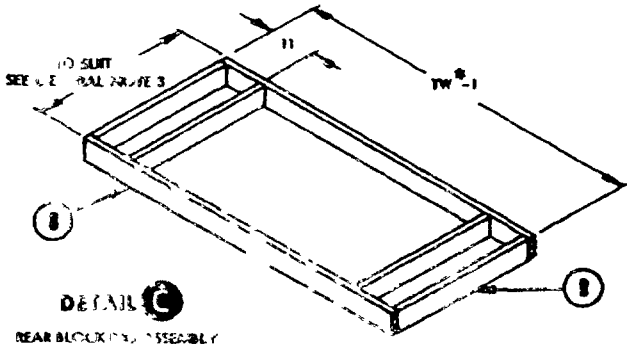

DETAIL C
REAR BLOCKING ASSEMBLY

ARROWS INDICATE
DESICCANT RECEPTACLE
END OF CONTAINERS

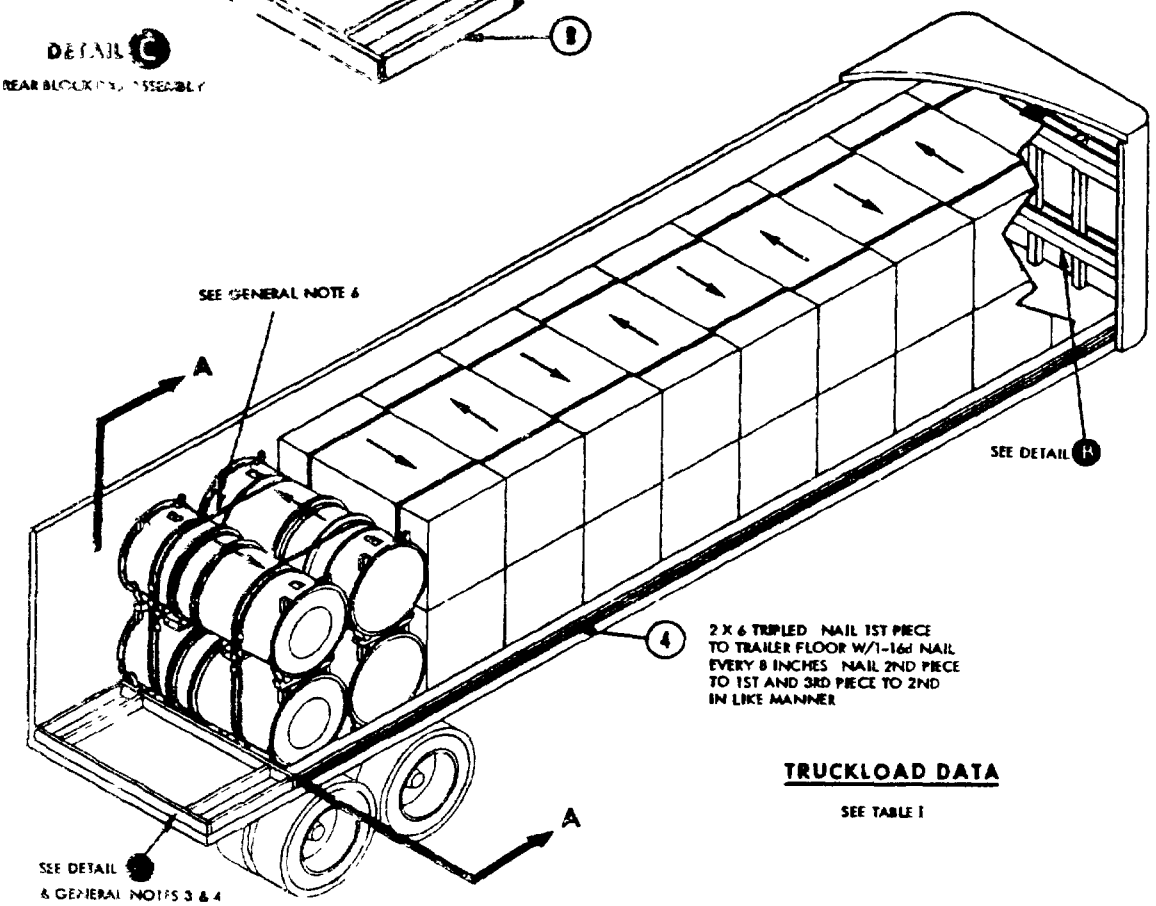

TRUCKLOAD DATA

SEE TABLE I

*TW = TRAILER WIDTH


PIECE NO.	DESCRIPTION	SIZE	NO PCS REQD.	NAIL TO	NUMBER	SIZE
	LIST OF MATERIALS & NAILING DATA				NAILS	
9	STRUT	2 X 6 TO SUIT	4	SEE 8	-	-
8	CROSSMEMBER	2 X 6 X TW*-1	2	9	3/JOINT	16d
7	BEAR STRAP	1 1/4 X .035 X 26 FT	2	-	-	-
6	SEAL	FOR 1 1/4 STRAP	48	-	-	-
5	UNITIZING STRAP	1 1/4 X .035 X 19 FT	22	-	-	-
4	SLEEPER	2 X 6 X RANDOM LENGTHS	240 FT	SEE FIELD NOTE		
3	VERTICAL	4 X 4 X 48 1/4	4	SEE 1 & 2	-	-
2	FWD HORIZONTAL	2 X 6 TO SUIT	4	3	3/JOINT	12d
1	AFT HORIZONTAL	2 X 6 X TW*-1	4	3	3/JOINT	12d

TABLE I

TRAILER LENGTH (FT)	NO. OF CONTAINERS	NET WEIGHT (LBS)
40	32	45,234
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T23:42Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

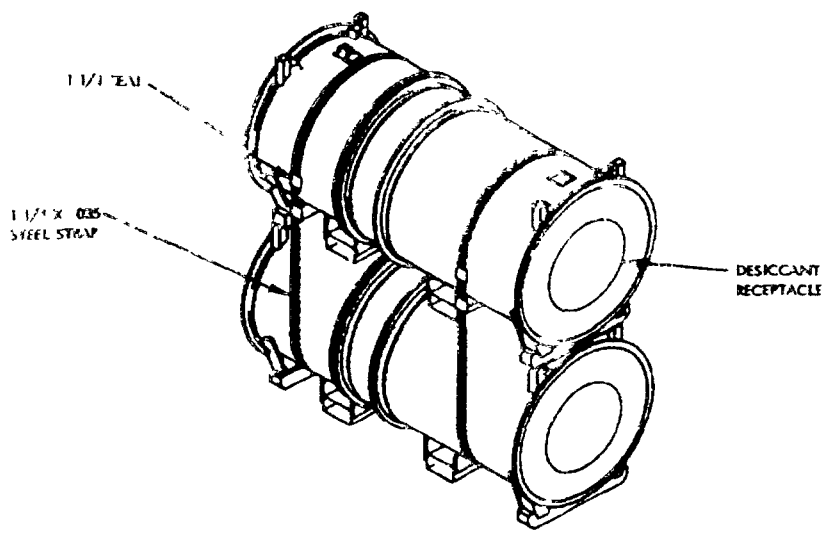


1. STACK TWO CONTAINERS USING A FORKLIFT TRUCK. ORIENT CONTAINERS WITH BOTH DESICCANT RECEPTACLES AT ONE END
2. BE CERTAIN THAT THE STACKING FEATURES ARE MATED TO PREVENT SHIFTING IN THE LATERAL AND LONGITUDINAL DIRECTIONS
3. SECURE TOP CONTAINER TO BOTTOM CONTAINER WITH TWO 1 1/4 X .035 STEEL STRAPS POSITIONED AS INDICATED ABOVE
4. AFTER TENSIONING STRAPS, SEAL WITH TWO DOUBLE CRIMPED SEALS OR ONE DOUBLE NOTCHED SEAL

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED CONTAINERS, EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. CONTAINERS SHALL BE DEUNITIZED AFTER UNLOADING THE VEHICLE

* W = TRAILER WIDTH

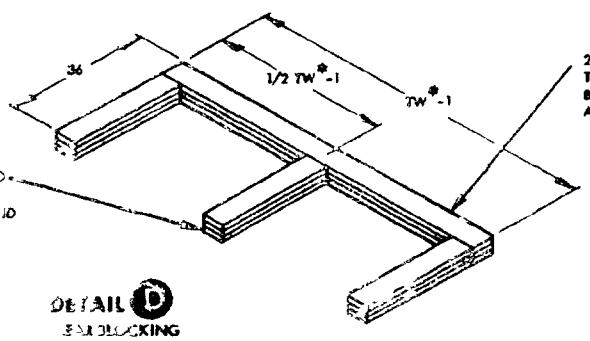

DETAIL D
END BLOCKING
(SEE OPTIONAL NOTE 4)

PREPARING ACTIVITY
NAVY - OS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-STD-1300 8 (NAVY)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

NAME OF PREPARING ACTIVITY (Typed name and address of activity)

TELEPHONE NO.

DATE

DD FORM 1426 (EG) 85

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Weapons Station Earle
NWHC (R Harris)
Colts Neck, NJ 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.