MILITARY STANDARD

UNIT LOAD
FOR DOMESTIC AND OVERSEAS SHIPMENT
MK 23 MODS JATO ROCKET MOTORS
IN WOOD ADAPTER

MIL-STD-1322-808
(NAVY)

30 APRIL 1993

SUPERSEDING
WR-53/808
14 MAY 1971

UNIT LOAD DATA

NUMBER OF ROCKET MOTORS PER UNIT LOAD _____ 6

GROSS WEIGHT OF ONE ROCKET MOTOR _____ 272 LBS.

WEIGHT OF PALLET _____ 90 LBS.

WEIGHT OF WOOD ADAPTER _____ 150 LBS.

WEIGHT OF STEEL STRAPPING _____ 12.6 LBS.

GROSS WEIGHT OF UNIT LOAD _____ 1,884 LBS. Δ


CUBE _____ 44.2 CU. FT.

Δ DO NOT USE FOR SHIPPING WEIGHT


DO NOT STACK MORE THAN
5 UNIT LOADS HIGH IN STORAGE

FOR HAZARD CLASSIFICATION SEE SW020-AC-SAF-010/020/030

FOR UNIT LOAD QUALIFICATION
SEE NWSE TEST REPORT #TE AIR 03-05-71

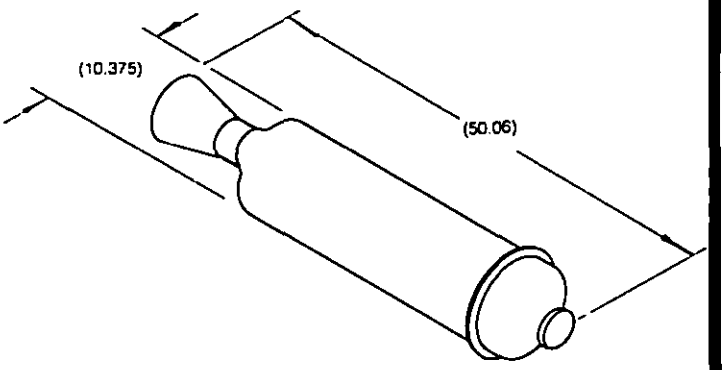

MK 23 MODS JATO ROCKET MOTOR

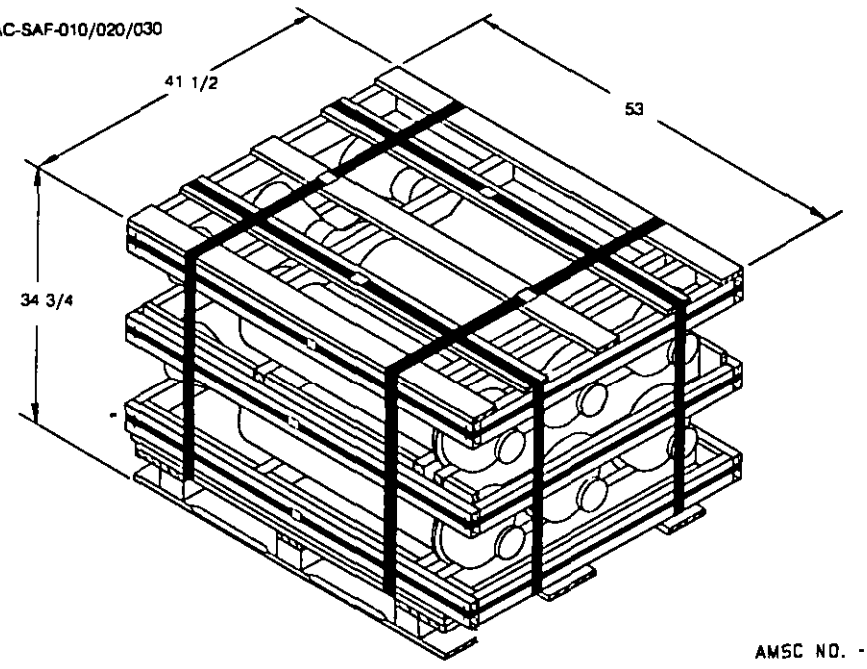

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

SIGNATURE, TDA, WPNSTA EARLE — DATE 12/5/97

SIGNATURE NAVAIRSYSCOM BY DIRECTION — DATE 12/5/97

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1322 (NAVY).

ORIGINATOR — DATE 1-12-97

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 20260-23T23:55Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD STRAPPING, ITEM 2, THROUGH SLOTS IN PALLET DECK, ITEM 1, AS SHOWN IN DETAIL A.

(B) POSITION GIRTHWISE STRAPPING, ITEM 5, AROUND THE PREFABRICATED FRAME ASSEMBLIES, TENSION AND DOUBLE NOTCH SEAL, ITEM 6. SECURE STRAPPING WITH STAPLES, ITEM 7.

(C) ALIGN DECK BOARD OF THE BOTTOM FRAME ASSEMBLY WITH ENDS OF THE PALLET DECK AND WITH EQUAL OVERHANG ON BOTH SIDES. SECURE THE DECK BOARD OF THE BOTTOM FRAME TO THE PALLET W/1-6d NAIL IN EACH POST ON THE POST TYPE PALLET OR 2-6d NAILS IN EACH STRINGER ON THE STRINGER TYPE PALLETS.

(D) POSITION THREE MOTORS ON THE YOKES OF THE BOTTOM FRAME AS SHOWN.

(E) PLACE THE PREFABRICATED INTERMEDIATE FRAME ASSEMBLY OVER THE MOTORS. ASCERTAIN THE PRESENCE OF THE GIRTHWISE STRAPPING.

(F) POSITION THREE MOTORS ON THE YOKES OF THE INTERMEDIATE FRAME AS SHOWN.


(G) PLACE THE PREFABRICATED TOP FRAME ASSEMBLY OVER THE MOTORS. ASCERTAIN PRESENCE OF GIRTHWISE STRAPPING.


(H) POSITION STRAPPING, ITEM 2, AROUND THE UNIT LOAD AS SHOWN. TENSION AND DOUBLE NOTCH SEAL, ITEM 4.

(I) POSITION STRAPPING, ITEM 3, UNDER THE PALLET DECK AND AROUND THE UNIT LOAD AS SHOWN. TENSION AND DOUBLE NOTCH SEAL, ITEM 4.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

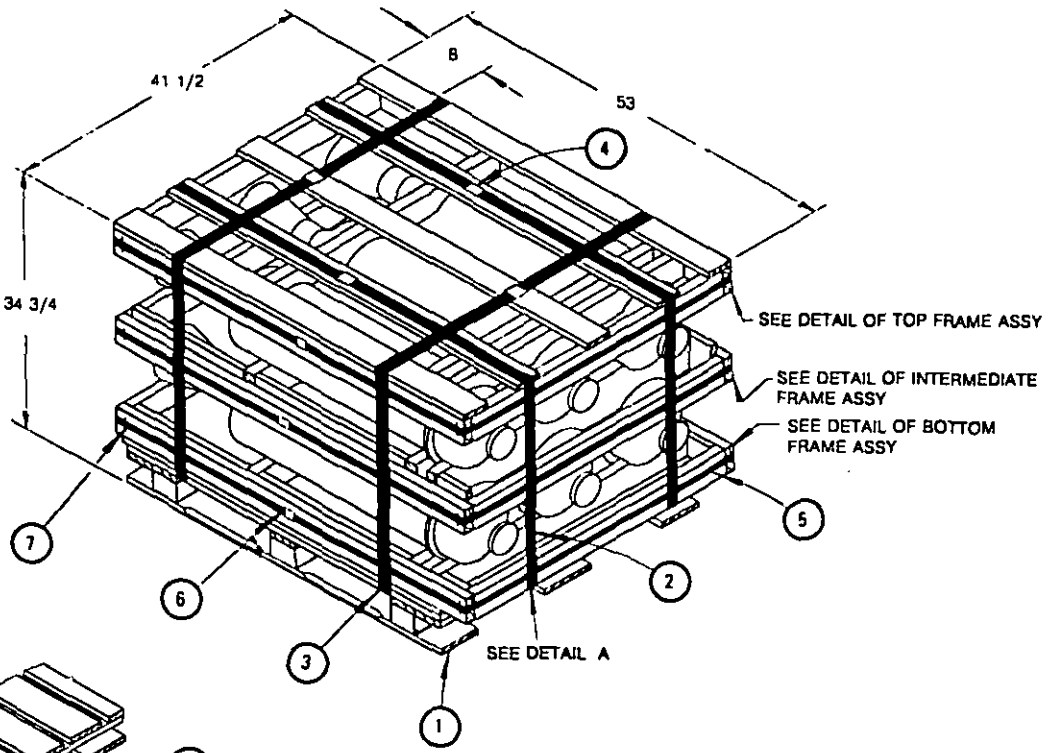

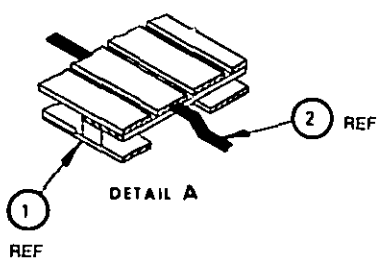

UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IAW MIL-STD-1322

REQ	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
12	7	STAPLE	STEEL	3/4
3	6	SEAL	STEEL	FOR 3/4 STRAPPING
3	5	STRAPPING, GIRTHWISE	STEEL	3/4 X .035 X 16 FT 6
4	4	SEAL	STEEL	FOR 1 1/4 STRAPPING
2	3	STRAPPING, LATERAL	STEEL	1 1/4 X .035 X 12 FT 6
2	2	STRAPPING, LONGITUDINAL	STEEL	1 1/4 X .035 X 14 FT 6
1	1	*PALLET MIL-P-15011*	WOOD	*40 X 48 X 5 1/2*


LIST OF MATERIALS


DEPALLETIZING PROCEDURE

(a) CUT AND REMOVE LONGITUDINAL & LATERAL STRAPPING.
(b) REMOVE TOP FRAME.
(c) REMOVE THE TOP LAYER OF MOTORS.
(d) REMOVE INTERMEDIATE FRAME.
(e) REMOVE THE BOTTOM LAYER OF MOTORS.
(f) REMOVE NAILS USED TO SECURE BOTTOM FRAME TO PALLET.
(g) REMOVE BOTTOM FRAME FROM PALLET.

Source: https://assist.dla.mil -- Downloaded: 20260123T23:55Z
Check the source to verify that this is the current version before use.


TOP FRAME ASSEMBLY

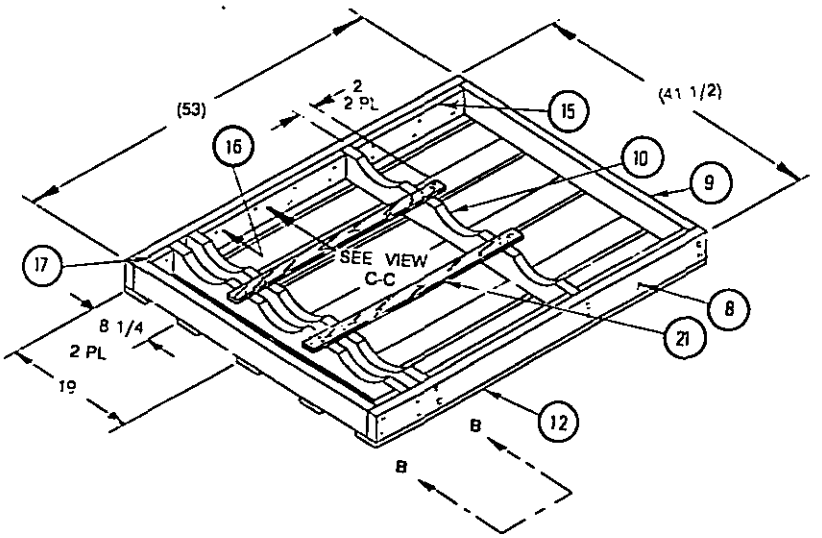

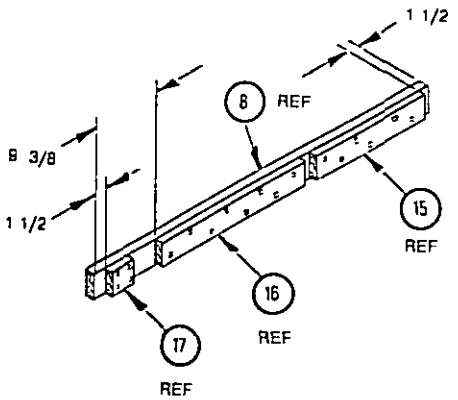

VIEW C-C

(2 REQUIRED)

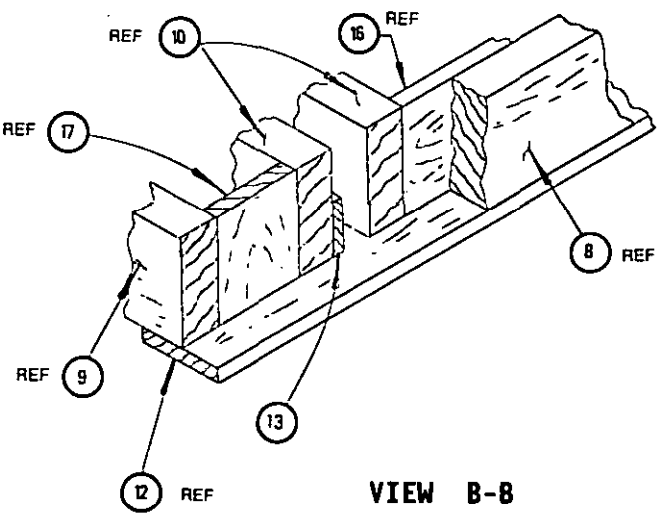

VIEW B-B

FRAME CONSTRUCTION

NAIL THE FOLLOWING ITEMS AS FOLLOWS:

1. ITEM 17 TO ITEM 8 WITH 4-6d NAILS.
   ITEM 16 TO ITEM 8 WITH 8-6d NAILS STAGGERED.
   ITEM 15 TO ITEM 8 WITH 6-6d NAILS STAGGERED.
   ABOVE NAILING PROCEDURES TO BE DONE IN 2 PLACES USING LOCATING DIMENSIONS AS SHOWN IN VIEW C-C.

2. ITEM 8 TO ITEM 9 WITH 2-16d NAILS/JOINT 4PL.

3. ITEM 13 TO 1 PIECE OF ITEM 10 WITH 12-6d NAILS STAGGERED. LOCATE ITEM 13 AS SHOWN IN VIEW B-B.


4. PLACE ITEM 10 WITH ATTACHED ITEM 13 ADJACENT TO ITEM 17 AND THE OTHER TWO ITEM 10'S ADJACENT TO ITEMS 15 & 16 AS SHOWN. SECURE IN PLACE BY NAILING ITEM 8 TO ITEM 10 WITH 2-16d NAILS/JOINT 6PL.


5. ITEM 12 TO ITEMS 9 & 10 WITH 2-8d NAILS/JOINT.

6. ITEM 21 TO ITEM 10 WITH 2-6d NAILS/JOINT IN LOCATION AS SHOWN 3 PL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:55Z
Check the source to verify that this is the current version before use.


INTERMEDIATE FRAME ASSEMBLY

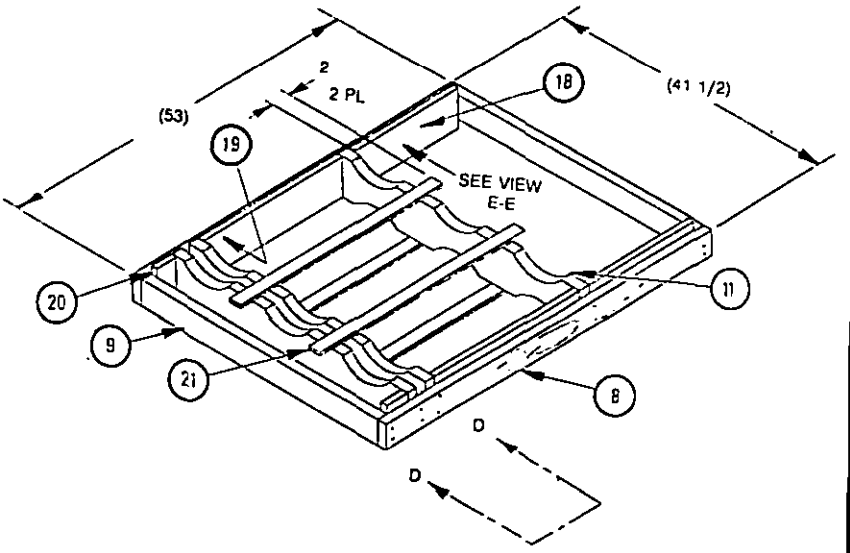

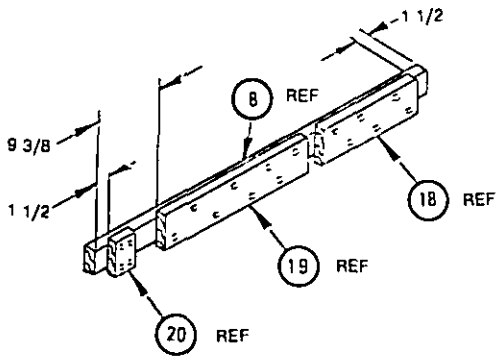

VIEW E-E

(2 REQUIRED)

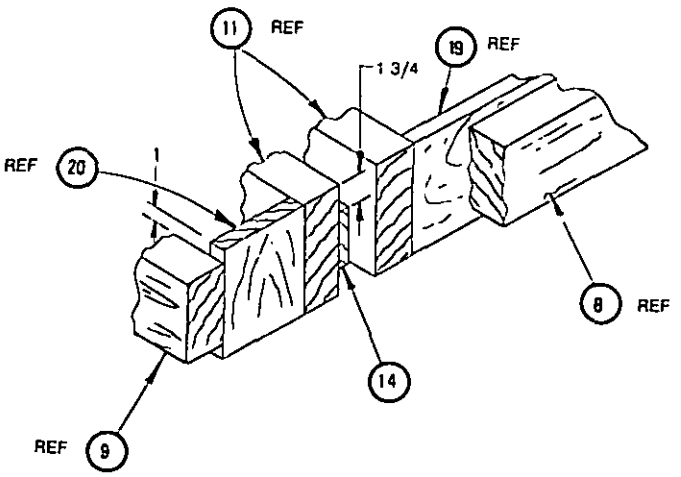

VIEW D-D


FRAME CONSTRUCTION


NAIL THE FOLLOWING ITEMS AS FOLLOWS:

1. ITEM 20 TO ITEM 8 WITH 4-6d NAILS.
   ITEM 19 TO ITEM 8 WITH 8-6d NAILS STAGGERED.
   ITEM 18 TO ITEM 8 WITH 8-6d NAILS STAGGERED.
   ABOVE NAILING PROCEDURES TO BE DONE IN 2 PLACES USING LOCATING DIMENSIONS AS SHOWN IN VIEW E-E
2. ITEM 8 TO ITEM 9 WITH 2-16d NAILS/JOINT 4PL.
3. ITEM 14 TO 1 PIECE OF ITEM 11 WITH 12-6d NAILS STAGGERED. LOCATE ITEM 14 AS SHOWN IN VIEW D-D.
4. PLACE ITEM 11 WITH ATTACHED ITEM 14 ADJACENT TO ITEM 20 AND THE OTHER TWO ITEM 11'S ADJACENT TO ITEMS 19 & 18 AS SHOWN. SECURE IN PLACE BY NAILING ITEM 8 TO ITEM 11 WITH 2-16d NAILS/JOINT 6PL.
5. ITEM 21 TO ITEM 11 WITH 2-6d NAILS/JOINT IN LOCATION AS SHOWN 3 PL.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T23:55Z
Check the source to verify that this is the currentversion before use.


BOTTOM FRAME ASSEMBLY

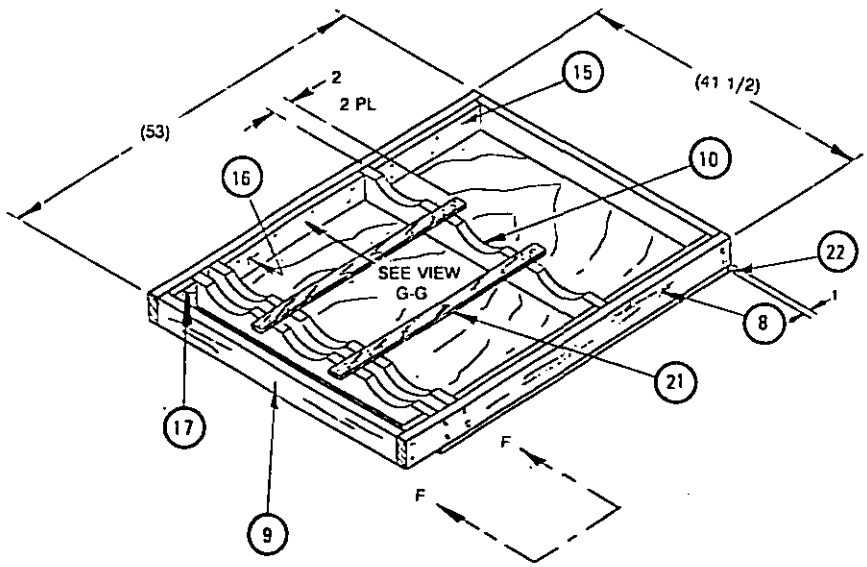

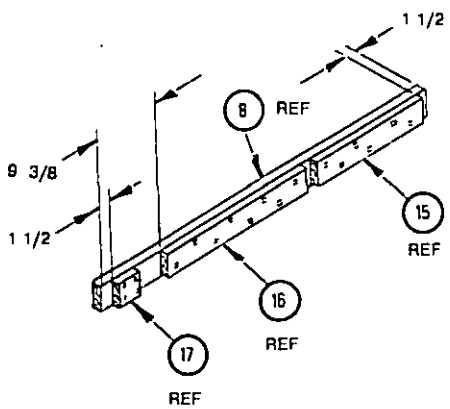

VIEW G-G

(2 REQUIRED)

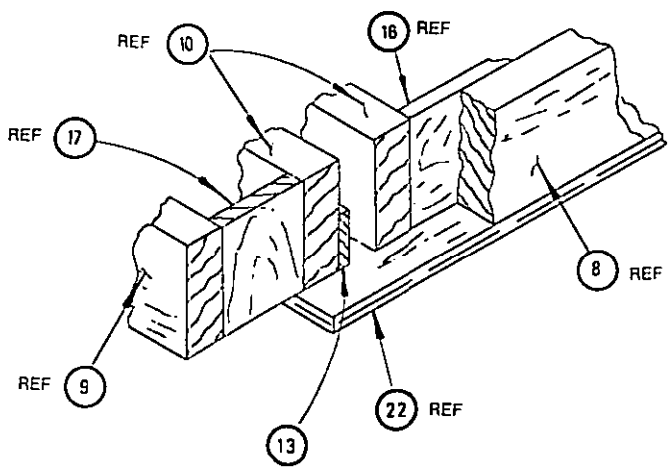

VIEW F-F


FRAME CONSTRUCTION

NAIL THE FOLLOWING ITEMS AS FOLLOWS:

1. ITEM 17 TO ITEM 8 WITH 4-6d NAILS.
   ITEM 16 TO ITEM 8 WITH 8-6d NAILS STAGGERED.
   ITEM 15 TO ITEM 8 WITH 6-6d NAILS STAGGERED.
   ABOVE NAILING PROCEDURES TO BE DONE IN 2 PLACES USING LOCATING DIMENSIONS AS SHOWN IN VIEW G-G
2. ITEM 8 TO ITEM 9 WITH 2-16d NAILS/JOINT 4PL.
3. ITEM 13 TO 1 PIECE OF ITEM 10 WITH 12-8d NAILS STAGGERED. LOCATE ITEM 13 AS SHOWN IN VIEW F-F.
4. PLACE ITEM 10 WITH ATTACHED ITEM 13 ADJACENT TO ITEM 17 AND THE OTHER TWO ITEM 10'S ADJACENT TO ITEMS 15 & 16 AS SHOWN. SECURE IN PLACE BY NAILING ITEM 8 TO ITEM 10 WITH 2-16d NAILS/JOINT 6PL.
5. ITEM 22 TO ITEMS 8 & 10 WITH 4-8d NAILS STAGGERED AT LOCATION SHOWN.
6. ITEM 21 TO ITEM 10 WITH 2-6d NAILS/JOINT IN LOCATION AS SHOWN 3 PL.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:55Z
Check the source to verify that this is the current version before use.

FRAME DETAILS

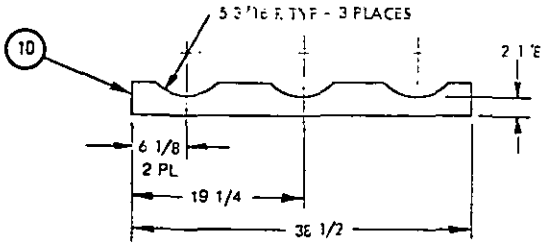

YOKE-TOP & BOTTOM

(6 REQUIRED)

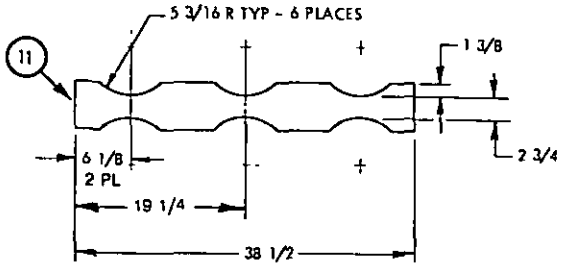

YOKE-INTERMEDIATE

(3 REQUIRED)

REQ	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1	22	DECK BOARD	PLYWOOD	48 X 41 1/2 X 3/4
8	21	RESTRAINERS	PLYWOOD	33 3/8 X 1 3/4 X 1/2
2	20	RESTRAINERS, INTERMEDIATE FRAME	WOOD	1 X 6 X 3 3/8
2	19	RESTRAINERS, INTERMEDIATE FRAME	WOOD	1 X 6 X 23 3/8
2	18	RESTRAINERS, INTERMEDIATE FRAME	WOOD	1 X 6 X 17 1/4
4	17	RESTRAINERS, TOP & BOTTOM FRAME	WOOD	1 X 4 X 3 3/8
4	16	RESTRAINERS, TOP & BOTTOM FRAME	WOOD	1 X 4 X 23 3/8
4	15	RESTRAINERS, TOP & BOTTOM FRAME	WOOD	1 X 4 X 17 1/4
1	14	SPACER	PLYWOOD	38 1/2X 2 X 1/2
2	13	SPACER	PLYWOOD	38 1/2 X 1 3/4 X 1/2
5	12	TOP BATTENS	WOOD	1 X 4 X 53
3	11	INTERMEDIATE YOKES	WOOD	2 X 6 X 38 1/2
6	10	TOP & BOTTOM YOKES	WOOD	2 X 4 X 38 1/2
6	9	END PIECES	WOOD	2 X 4 X 38 1/2
6	8	SIDE PIECES	WOOD	2 X 4 X 53

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:552
Check the source to verify that this is the current version before use.