MILITARY STANDARD

MIL-STD-1323-196
(NAVY)


30 MAY 1961

RAILCAR LOADING

DISPENSER AND BOMB, AIRCRAFT
CBU-MK 20 AND MODS (ROCKEYE II)
IN CONTAINER CNU-319/E
UNIT LOAD UNDERWAY REPLENISHMENT

UNIT LOAD DATA

UNIT LOAD DRAWING	MIL-STD-1323-97 (NAVY)
WEIGHT (APPROXIMATE)	3029 LBS
DIMENSIONS	112 1/8 L X 36 1/8 W X 38 1/2 H
	STACKING HEIGHT 38
CUBE	82.2 CU FT
DOT MARKING CLASSIFICATION	CLASS A

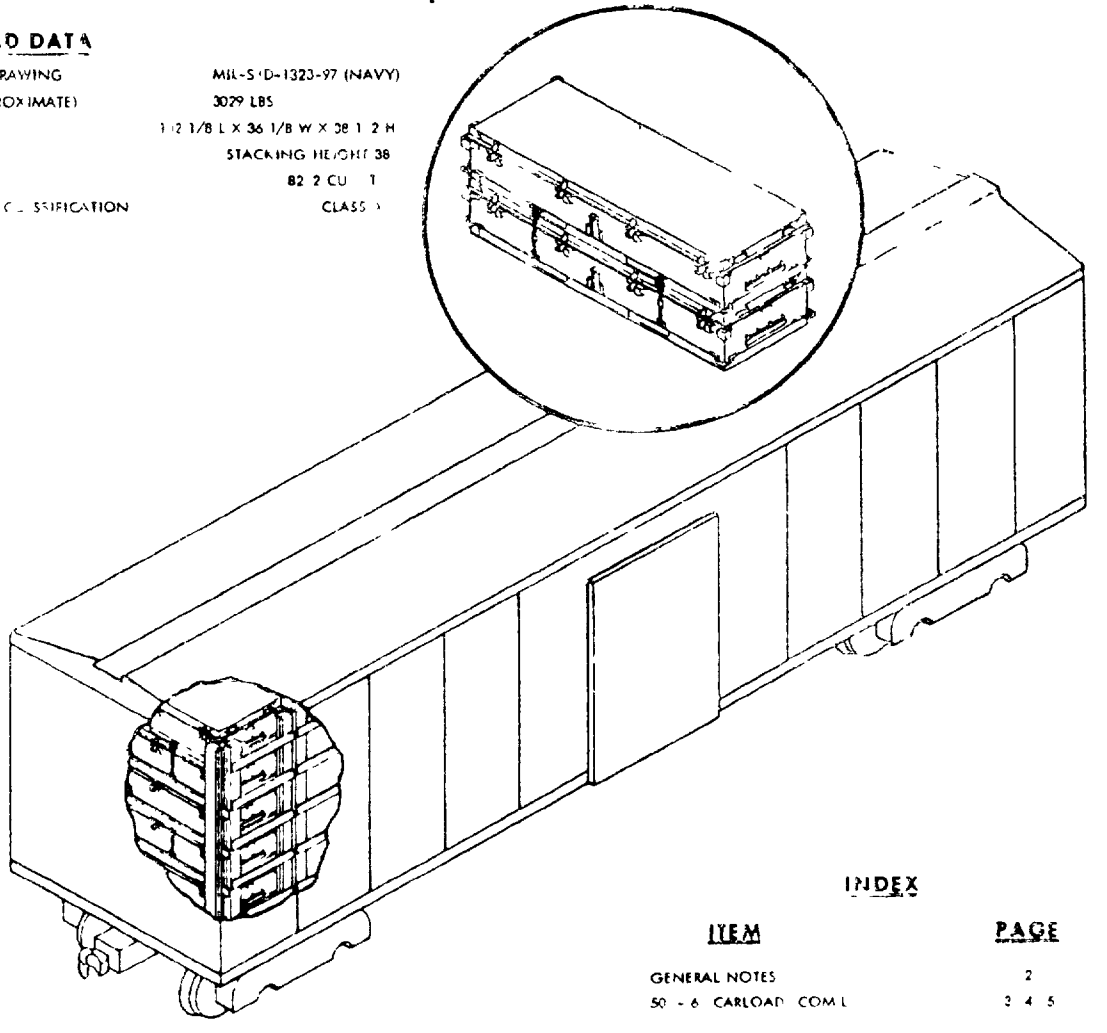

INDEX

ITEM	PAGE
GENERAL NOTES	2
50 - 6 CARLOAD COMBI	3 4 5

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCK-LOADING AND CONTAINERLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-236

FSC 8130

AUTHORIZED AND RELEASED FOR GENERAL USE

[illegible]
TECHNICAL DIRECTION AGENT (NAVY)
DATE

[illegible]
AIR SYSTEMS BY DIRECTION
DATE

APPROVED BY BUREAU OF EXPLOSIVES

M. R. Miller 5/1/63
SIGNATURE SUPERVISOR, MILITARY AND INTERMODAL SERVICES DATE

ORIGINATOR [illegible] 5/23/62
DATE

NAVAL WEAPONS HANDLING CENTER
WINSLOW EARLE, NEW JERSEY

PAGE 1 OF 5


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:04Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. FOR GENERAL INFORMATION CONCERNING ORDERING, INSPECTING, AND PREPARING CARS, AND FOR DUNNAGING MATERIALS, DESIGN AND INSTALLATION OF DUNNAGE SEE THE GENERAL DOCUMENT MIL-STD-1325, "RAILCAR LOADING OF HAZARDOUS MATERIALS"
2. WHEN PLANNING SHIPMENTS ORDER THE MINIMUM NUMBER OF CARS OF THE CAPACITY REQUIRED FOR THE SHIPMENT
3. LOADING PLANS SHOWN ARE FOR COMMERCIAL BOXCARS WITH 50 FEET 6 INCHES INSIDE LENGTH, 110 INCHES INSIDE WIDTH AND WITH DOORS NOT LESS THAN 10 FEET WIDE
4. THE "LOAD LIMIT" OF A CAR MUST NOT BE EXCEEDED NOR SHOULD THE RAILCAR BE LOADED SO THAT MORE THAN ONE-HALF OF THE "LOAD LIMIT" IS CARRIED BY ONE SET OF TRUCKS
5. IF END WALLS OF CARS ARE NOT SQUARE THEY MUST BE SQUARED OFF BEFORE STARTING TO LOAD CAR
6. THE LOAD CONSISTS OF AIRCRAFT DISPENSER AND BOMB CBU MK 20 AND MODS (ROCKEYE II) IN CONTAINER CNU-319/E UNITIZED IN ACCORDANCE WITH MIL-STD-1323-97
7. THE UNIT LOADS ARE HANDLED AND LOADED WITH A SUITABLE FORKLIFT TRUCK
8. UNLESS OTHERWISE SPECIFIED NAILING SHALL BE IN ACCORDANCE WITH MIL-STD-1325
9. UNLESS OTHERWISE SPECIFIED, ALL MATERIAL SHALL BE AS SPECIFIED IN THE GENERAL DOCUMENT, MIL-STD-1325
10. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CAR IN AN ACCESSIBLE AREA, CLOSE AND SEAL BOXCAR DOORS, AND ATTACH EXPLOSIVE "A" PLACARDS TO THE OUTSIDE OF CAR AS PRESCRIBED IN OP 2165 (VOL I)


50 FT 6 IN BOXCAR, COMMERCIAL

1. THE CARLOAD CONSISTS OF EITHER 45 UNIT LOADS (THREE LAYER HIGH CARLOAD), WHEN THE LOAD LIMIT AND THE DOORWAY OPENING OF THE BOXCAR ARE ADEQUATE OR 30 UNIT LOADS (TWO LAYER HIGH CARLOAD) WHEN LOAD LIMIT OR DOORWAY OPENING ARE INADEQUATE
2. WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN COMMERCIAL BOXCARS AND A PARTIAL LAYER RESULTS THE PARTIAL LAYER OF LADING SHALL BE BRACED BY MEANS OF END BRACING AND/OR PARTIAL LAYER BRACING CONSTRUCTED IN ACCORDANCE WITH MIL-STD-1325-100 OR PARTIAL UPPER LAYER BRACING IN ACCORDANCE WITH MIL-STD-1325-102. SELECT THE TYPE OF BRACE TO COMPLY WITH THE WEIGHT OF THE UNITS TO BE RETAINED. THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR MUST BE COMPLIED WITH SEE MIL-STD 1325
3. THE LOADS AS SHOWN ARE BASED ON CARS WHICH HAVE 10 FT WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS GREATER THAN 10 FT WIDE
4. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH PLUG DOORS. DIMENSIONAL LUMBER DOORWAY PROTECTION PIECES 14 AND 15 IS NOT REQUIRED WHEN PLUG DOOR EQUIPPED BOXCARS ARE USED EXCEPT WHEN CAR HAS A COMBINATION OF PLUG DOOR AND CONVENTIONAL SLIDING DOOR. THE DIMENSIONAL LUMBER DOORWAY PROTECTION IS REQUIRED FOR THE CONVENTIONAL DOOR. PLUG DOORS MUST BE SECURELY CLOSED AND WIRED TOGETHER WITH A STRONG FLEXIBLE STEEL WIRE INSERTED THROUGH THE HOLES IN THE DOOR LATCH ASSEMBLY ONE OR MORE TIMES AND THE WIRE ENDS TWISTED TOGETHER
5. WHEN BOXCARS OTHER THAN 9 FT 2 IN WIDE ARE USED PIECES 4 OR 6 SHOULD BE INCREASED OR DECREASED AS NECESSARY FOR ACROSS CAR VOID NOT TO EXCEED 1/2 INCH EACH SIDE

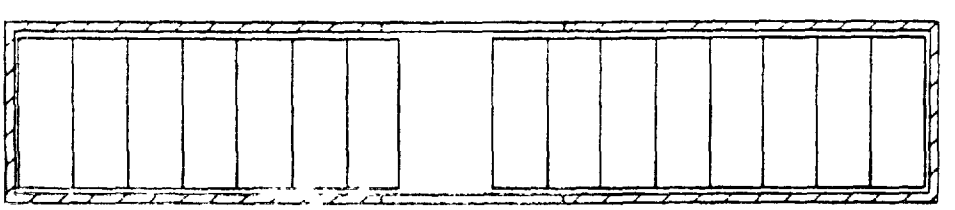

LOADING PLAN


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:04Z
Check the source to verify that this is the current version before use.

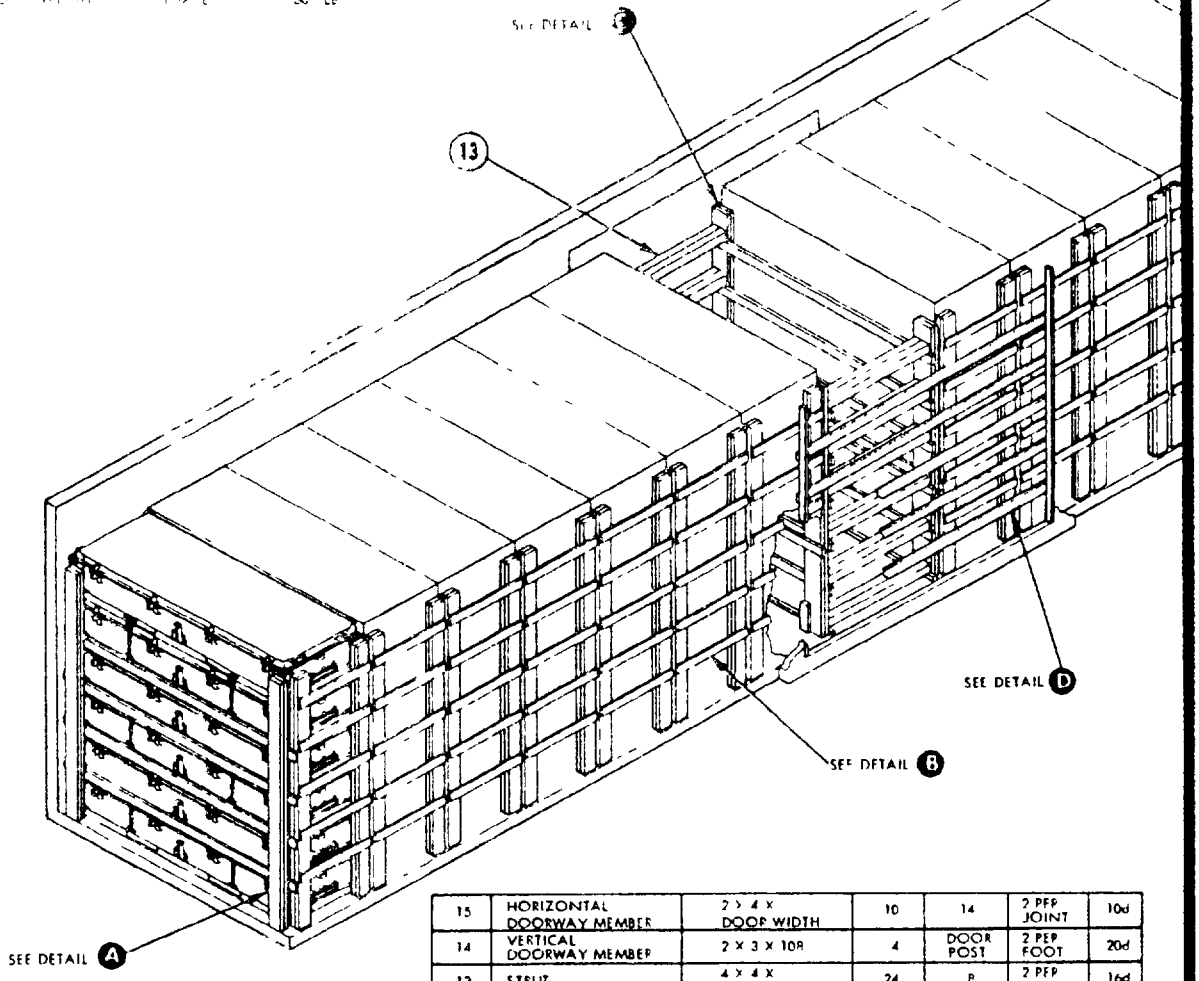

PIECE NO	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
15	HORIZONTAL DOORWAY MEMBER	2 X 4 X DOOR WIDTH	10	14	2 PER JOINT	10d
14	VERTICAL DOORWAY MEMBER	2 X 3 X 108	4	DOOR POST	2 PER FOOT	20d
13	STRUT	4 X 4 X WEDGE FIT	24	8	2 PER JOINT	16d
12	CENTER GATE SWAY CLEAT	2 X 4 X 12	4	7	3	10d
11	CENTER GATE HOLD DOWN	2 X 4 X CAR WIDTH -1/2	2	7	3 PER JOINT	10d
10	CENTER GATE STRUT CLEAT	2 X 2 X CAR WIDTH -1/2	2	8	2 PER JOINT	10d
9	CENTER GATE STRUT CLEAT	2 X 4 X CAR WIDTH - 1 2	10	8	3 PER JOINT	10d
8	CENTER GATE VERTICAL	2 X 8 X 108	4	SEE 9 & 10	-	-
7	CENTER GATE VERTICAL	2 X 8 X 108	4	8	1 PER FOOT	10d
6	SWAY BRACE HORIZONTAL	1 X 4 X 34	150	6	3 PER JOINT	10d
5	SWAY BRACE VERTICAL	2 X 6 X 109	60	SEE 4	-	-
4	SWAY BRACE VERTICAL	2 X 6 X 109	60	5	1 PER FOOT	10d
3	END GATE HORIZONTAL	1 X 4 X CAR WIDTH - 1/2	8	2	3 PER JOINT	10d
2	END GATE VERTICAL	2 X 6 X 108	4	SEE 1	-	-
1	END GATE VERTICAL	2 X 6 X 108	4	7	1 PER FOOT	10d


LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:04Z
Check the source to verify that this is the current version before use.

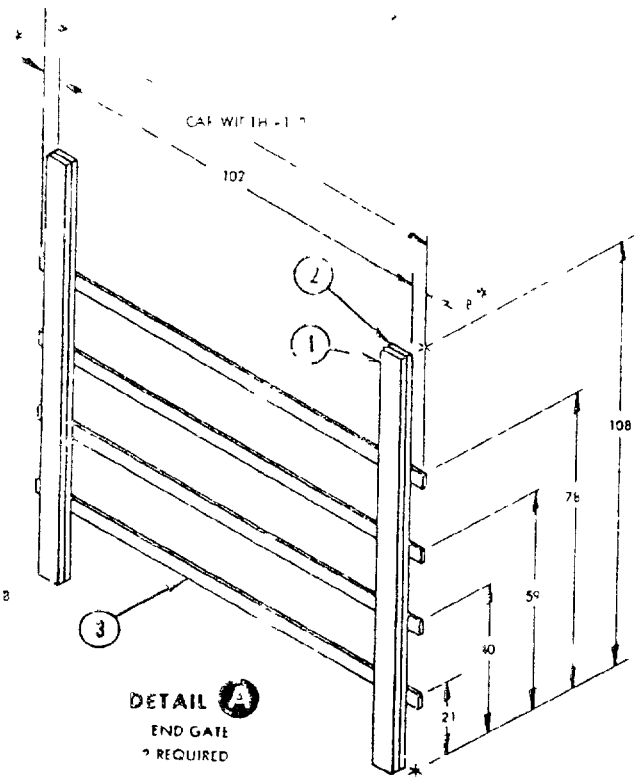

* DIMENSION "A" AND "B" MUST BE EQUAL


DETAIL A
END GATE
2 REQUIRED

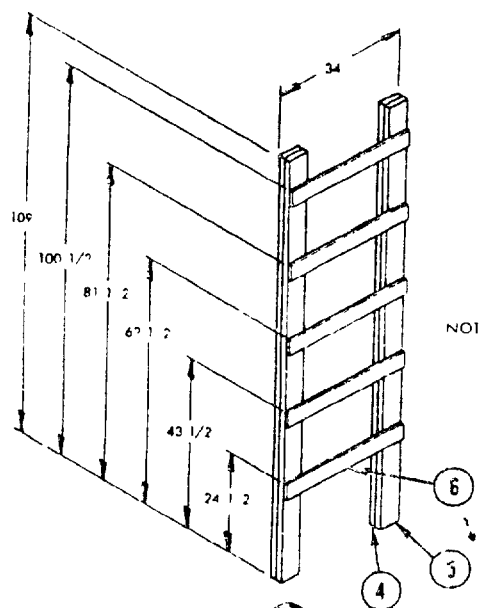


NOTE: ADD SHIM PIECES AS REQUIRED SO THAT ACROSS CAR VOID DOES NOT EXCEED 1 1/2 INCH EACH SIDE

DETAIL B
SWAY BRACE
20 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:04Z
Check the source to verify that this is the current version before use.

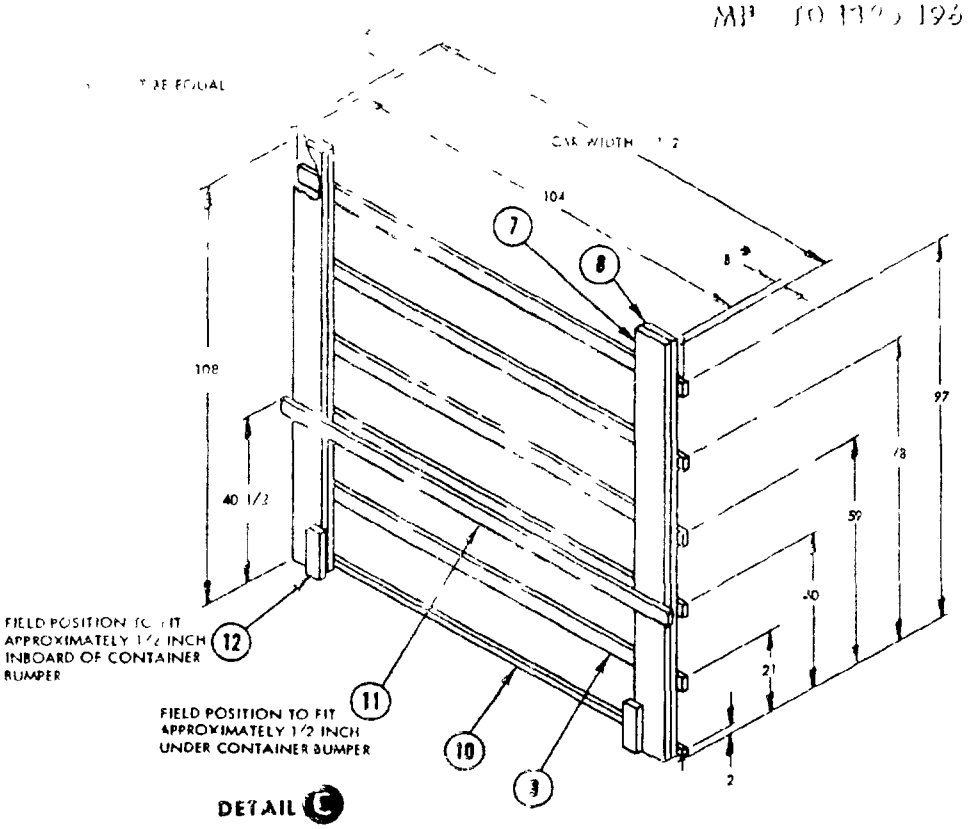

DETAIL C
CENTER GATE
2 REQUIRED

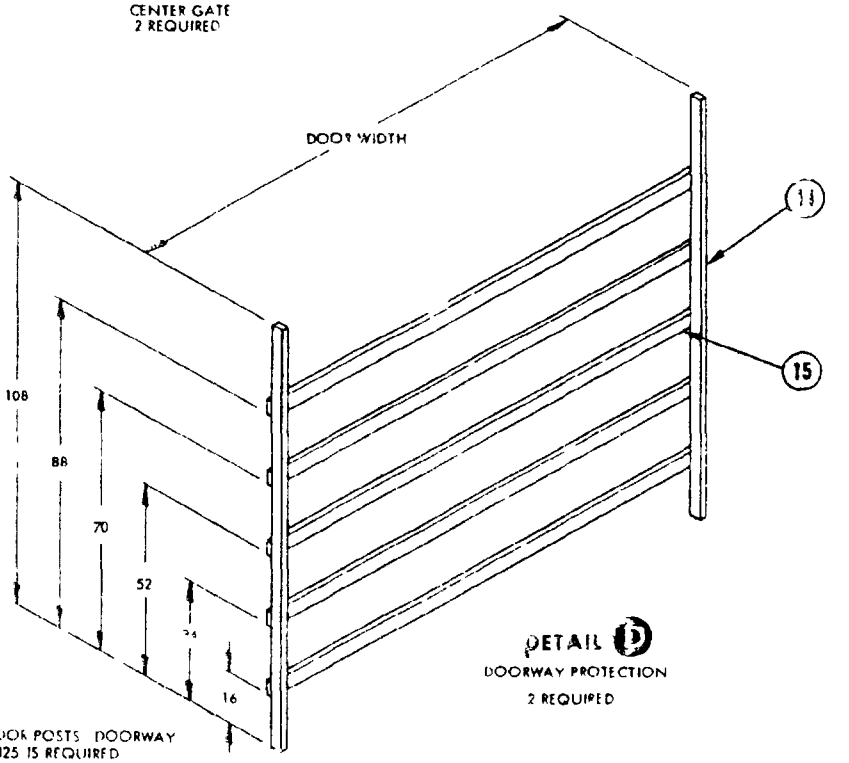

DETAIL D
DOORWAY PROTECTION
2 REQUIRED

CAR HAS STEEL DOOR POSTS DOORWAY PROTECTION PER MIL STD-1325 IS REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay It will otherwise enhance use of the document DoD contractors government activities, or manufacturers vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL STD 1325-196 (NAVY)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THIS DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 SUPERSEDES PREVIOUS EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:04Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DoD-316



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Weapons Station Earle
NWHC Code 803
Colts Neck, NJ 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:04Z
Check the source to verify that this is the current version before use.