MILITARY STANDARD


LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

5"/38 CARTRIDGE
FLEET ISSUE UNIT LOAD

MIL-STD-1386-26
(NAVY)
17 SEPTEMBER 1973

UNIT LOAD DATA

UNIT LOAD DRAWING WR-54/3
WEIGHT ..... 1475 LBS.
DIMENSIONS ... 47 13/16 L x 35 W x 43 11/16 H
CUBE ..... 43.3 CU. FT.
DOT HAZARD CLASSIFICATION .. EXPLOSIVES B
COAST GUARD CLASS ..... IIB

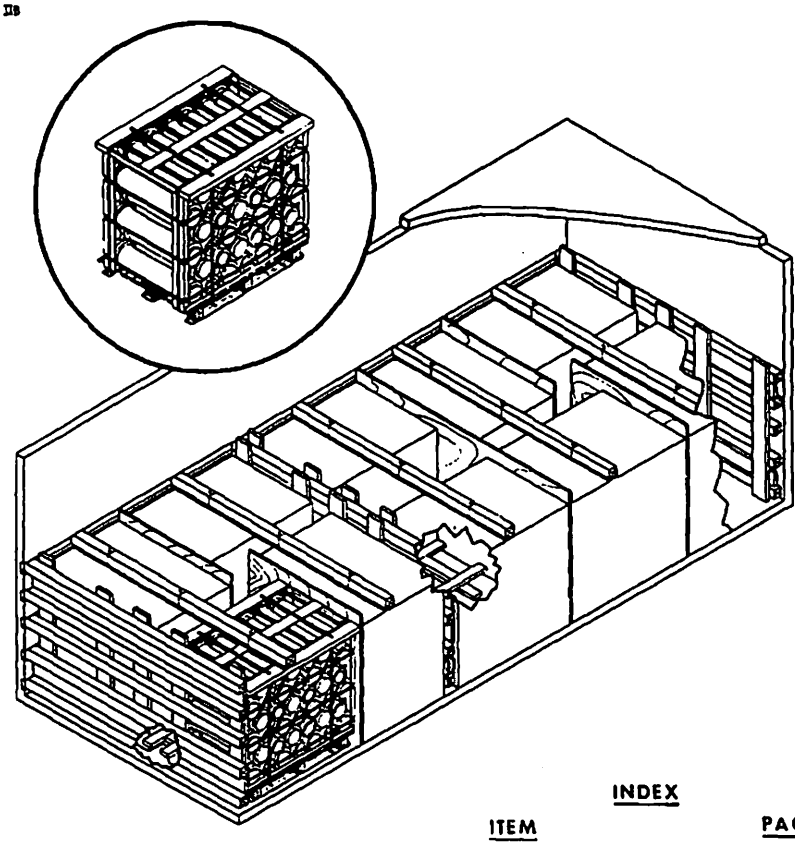

INDEX

ITEM PAGE

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS. REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

M.S. Gray NWHL
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly 7/6/73
SIGNATURE (OSD) SYSCOM, BY DIRECTION DATE

APPROVED BY US COAST GUARD

DATE

APPROVED BY BUREAU OF EXPLOSIVES

DATE

ORIGINATOR

SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
N A D EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:12Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF 5"/38 CARTRIDGES IN MK 15 TANKS. THE CARTRIDGES SHALL BE PALLETIZED IN ACCORDANCE WITH WR-54/3.
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C AND SHIPPED ON FLATCARS THAT MEET THE REQUIREMENTS OF PAMPHLET 6C.
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR.

CAUTION

WHEN POSITIONING CROSSMEMBERS, MAKE A VISUAL CHECK TO ENSURE THAT THE CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.
5. WHEN THE LONGITUDINAL VOID BETWEEN THE CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL F.
6. SWAY BRACES, DETAILS B AND D ARE ASSEMBLED IN PLACE. SUPPORTS ARE POSITIONED INBOARD OF THE CORNER PALLET POSTS. WITH STRINGERS AGAINST PALLET SKIDS, NAIL TO SUPPORTS WITH THREE 10d NAILS PER JOINT. CUT SPACERS TO FIT BETWEEN STRINGERS AND NAIL TO SUPPORTS WITH THREE 10d NAILS.
7. SHIM, PIECE NO. 12, SHALL BE OF SUFFICIENT THICKNESS TO FILL THE VOID BETWEEN THE TOP OF THE UNIT LOAD AND THE BOTTOM OF THE CROSSMEMBER. ONE HALF INCH SLACK IS PERMITTED.
8. APPLICABLE MATERIAL SPECIFICATIONS:
   DUNNAGE LUMBER - FED. SPEC. MM-L-751
   NAILS - FED. SPEC. FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT
   STRAP - FED. SPEC. QQ-S-781, TYPE I, CLASS A
   PLYWOOD - COMMERCIAL STANDARD CS45, GRADE INTERIOR C-D
9. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA, CLOSE AND SEAL CONTAINER DOORS AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF THE CONTAINER FOR THE APPROPRIATE MODE OF TRANSPORTATION AS PRESCRIBED IN OP 2165 (VOL. 1).

TOFC/COFC,CONTAINERSHIP AND HIGHWAY

1. THE CONTAINER LOAD CONSISTS OF 10 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT.
2. THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS:
   a. ONE CONTAINER ON 20-FT MILVAN CHASSIS WITH A DOUBLE BOGIE LOCATED IN THE NEXT TO LAST HOLE AND PULLED BY A SINGLE OR DOUBLE DRIVE AXLE TRACTOR.
   b. TWO CONTAINERS ON A 40-FT MILVAN CHASSIS WITH TWO BOGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR.
3. THE LOADED CONTAINER MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAYS USING SUITABLE COMMERCIAL EQUIPMENT OF ADEQUATE CAPACITY AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR. CONTAINERS MUST BE ADEQUATELY SECURED TO THE EQUIPMENT.
4. THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC. WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED:
   a. ONE CONTAINER ON 20-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.
   b. TWO CONTAINERS ON 40-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.


WARNING


CHASSIS/CONTAINERS COUPLED INTO A 40-FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC RAILCAR. THE REAR END OF THE 40-FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END. 20-FT AND 40-FT UNITS CAN BE LOADED ON THE SAME CAR.

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:12Z
Check the source to verify that this is the current version before use.

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS 10
NUMBER OF CROSSMEMBERS REQ'D 20
LOAD WEIGHT ..... 14,750 LBS.
DUNNAGE WEIGHT ..... 405 LBS.
CONTAINER WEIGHT ..... 5785 LBS.
GROSS WEIGHT ..... 20,940 LBS.

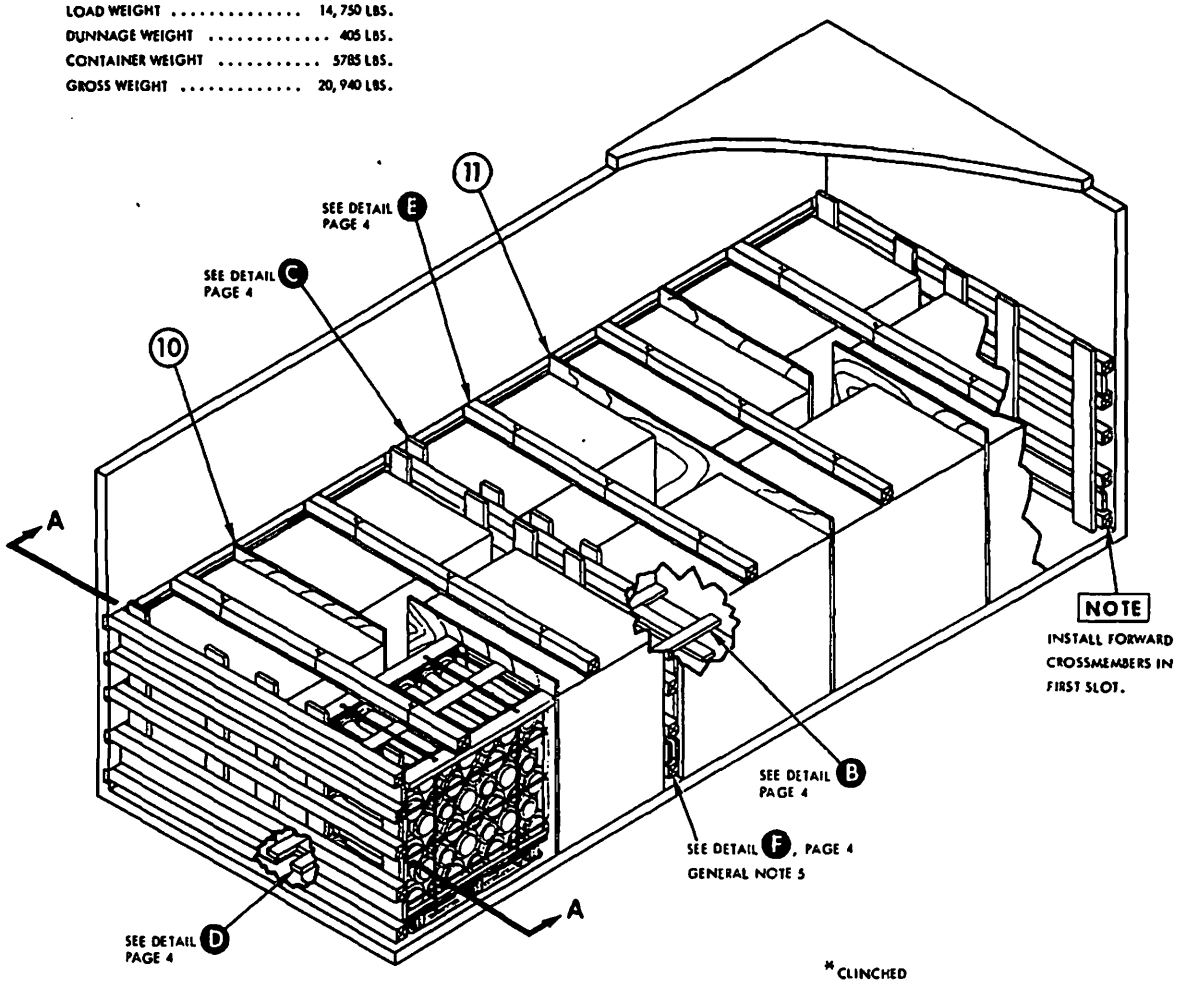

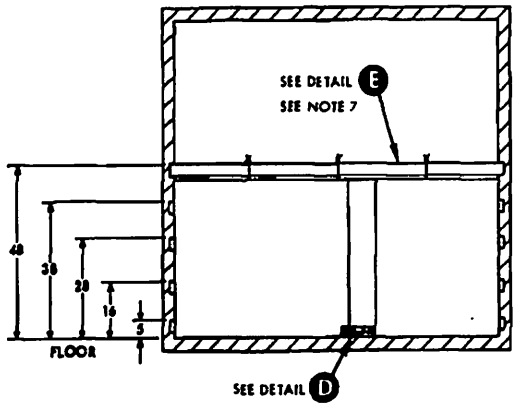


SECTION A-A

*CLINCHED


PIECE NO.	DESCRIPTION	SIZE	NO. PCS REQD	NAIL TO	NAILS: NUMBER	NAILS: SIZE
12	SHIM	4 WIDE x 90 LONG THICKNESS TO SUIT	5	-	-	-
11	SEPARATOR	1/2 x 48 x 90	1	-	-	-
10	SEPARATOR	1/2 x 48 x 48	4	-	-	-
9	SPACER	2 x 4 x TO SUIT	2	7	3	10d
8	STRINGER	2 x 4 x 46	2	7	3 PER JOINT	10d
7	SUPPORT	2 x 4 x 34	2	SEE 8	-	-
6	SPACER	2 x 4 x TO SUIT	8	3	3	10d
5	STRINGER	2 x 4 x 46	4	3	3 PER JOINT	10d
4	STRINGER	2 x 4 x 35	4	3	3 PER JOINT	10d
3	SUPPORT	2 x 4 x 23	8	SEE 4	-	-
2	HORIZONTAL	1 x 6 x CONTAINER WIDTH-1	8	SEE 1	-	-
1	VERTICAL	1 x 6 x 50	20	2	3 PER JOINT	6d*

LIST OF MATERIALS AND NAILING DATA


Source: https://assist.dla.mil -- Downloaded: 202610-24T00:12Z
Check the source to verify that this is the current version before use.

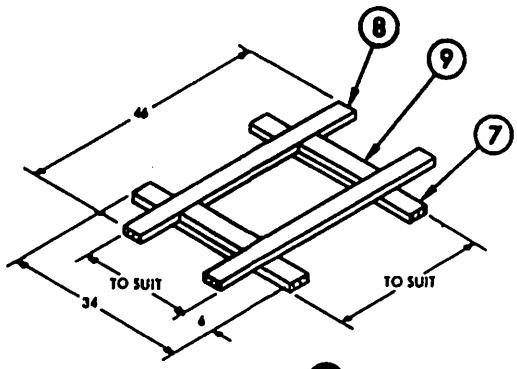


DETAIL B
SWAY BRACE ASSEMBLY
1 REQUIRED

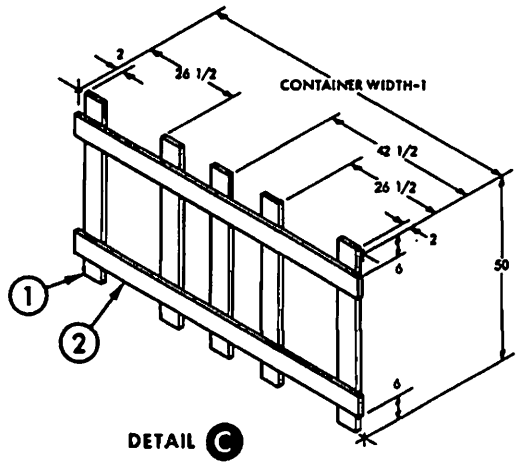


DETAIL C
SEPARATOR GATE
4 REQUIRED

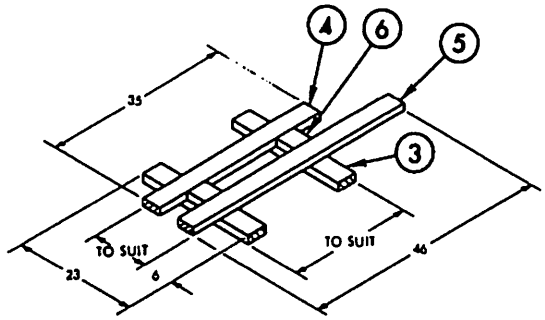

DETAIL D
SWAY BRACE ASSEMBLY
4 REQUIRED

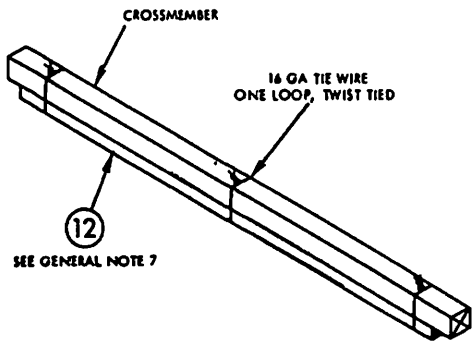

DETAIL E
HOLD DOWN
5 REQUIRED

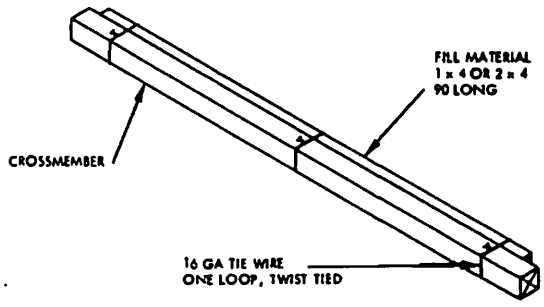

DETAIL F
FILL MATERIAL
SEE GENERAL NOTE 5

Source: https://assist.dla.mil -- Downloaded: 2026l0-24T00:12Z
Check the source to verify that this is the currenversion before use.

REVIEW ACTIVITY:

NAVY - OS

PREPARING ACTIVITY:

NAVY - OS

PROJECT NO. 8140-N213

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.