MILITARY STANDARD


MIL-STD 1386-38
(NAVY)
22 FEBRUARY 1974

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

BOMB GUIDANCE KIT, KMU-388/B (LESS SEEKER ASSEMBLY) FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54 /23b
WEIGHT	605 LBS
DIMENSIONS	48 L x 41 3 4 W x 71 1/4 H
CUBE	76 2 CU FT
DOT HAZARD CLASSIFICATION	INERT
COAST GUARD CLASSIFICATION	NONE

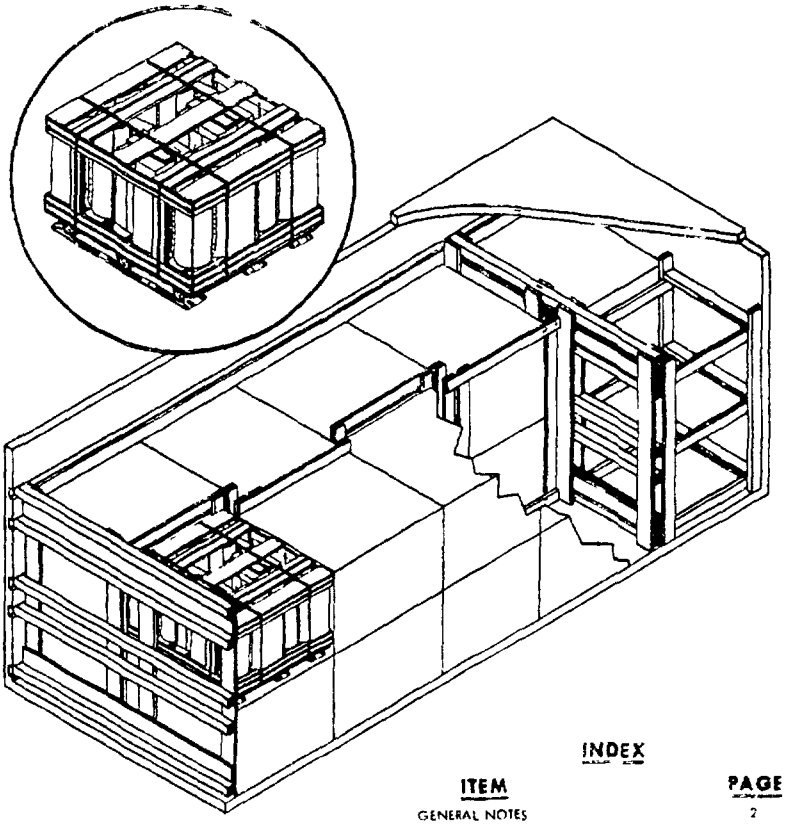

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS REFER TO THE INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC, CONTAINERSHIP & HIGHWAY	2 & 3
DETAILS	4

FSC 3140

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

M S Kaul NWL TH 2/15/74
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

A.C. Hebb 2/15/74
SIGNATURE NAVSYSCOM BY DIRECTION DATE

ORIGINATOR Charles McBride 2/15/74
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

PAGE 1 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET UNIT LOADS OF BOMB GUIDANCE KIT, KMU-388/B THE UNIT LOAD SHALL BE IN ACCORDANCE WITH VR-54 230

2 THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C

3 IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR

4 CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT

CAUTION

WHEN POSITIONING CROSSMEMBERS, MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE

5 WHEN THE LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND THE SEPARATOR GATE IS GREATER THAN ONE INCH USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND GATE AS SHOWN IN DETAIL F PAGE 4

6 THICKNESS OF FILLER ASSEMBLY, DETAIL E MAY BE VARIED TO FILL THE VOID BETWEEN UNIT LOADS BY VARYING THE THICKNESS OF PIECE 7 ONE INCH SLACK IS PERMITTED

7 APPLICABLE MATERIAL SPECIFICATIONS

DUNNAGE LUMBER-FED SPEC MM-L-751

NAILS - FED SPEC FF-N-105 TYPE II STYLE 10 COMMON BRIGHT

8 SIDE FRAME ASSEMBLY, DETAIL C, MAY BE ASSEMBLED IN PLACE LENGTH OF STRUT, PIECE 2, SHALL BE SUFFICIENT TO CAUSE THE ASSEMBLY TO FILL THE VOID BETWEEN THE UNIT LOAD AND THE CONTAINER SIDE WALL ONE INCH SLACK IS PERMITTED

9 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL CONTAINER DOORS

TOFC/COFC, CONTAINERSHIP AND HIGHWAY

1 THE CONTAINERLOAD CONSISTS OF 18 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT

2 THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS

A ONE CONTAINER ON 20-FT MILVAN CHASSIS WITH DOUBLE BOGIES AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR

B TWO CONTAINERS ON A 40-FT MILVAN CHASSIS WITH DOUBLE BOGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR

3 ONE OR TWO LOADED CONTAINERS MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAYS ON SUITABLE COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY CONTAINERS MUST BE ADEQUATELY SECURED TO THE EQUIPMENT


4 THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED

A ONE CONTAINER ON 20-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES


B TWO CONTAINERS ON 40-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES

WARNING

CHASSIS CONTAINERS COUPLED INTO A 40-FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC RAILCAR THE REAR END OF THE 40-FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END 20-FT AND 40-FT UNITS CAN BE LOADED ON THE SAME CAR

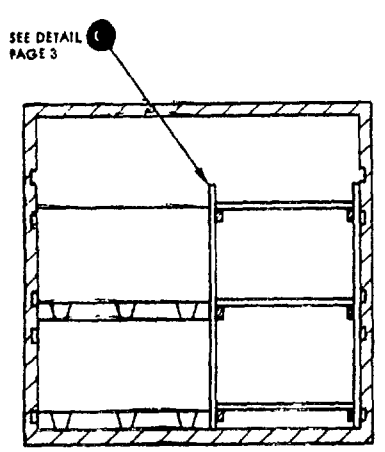

SECTION A-A

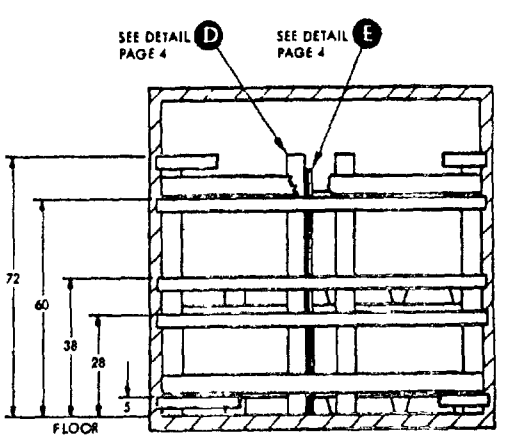



SECTION B-B

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	18
NUMBER OF CROSSMEMBERS REQ'D	10
LOAD WEIGHT	40 860 LBS
DUNNAGE WEIGHT	3[illegible] LBS
CONTAINER WEIGHT	[illegible] 785 LBS
GROSS WEIGHT	47 077 LBS

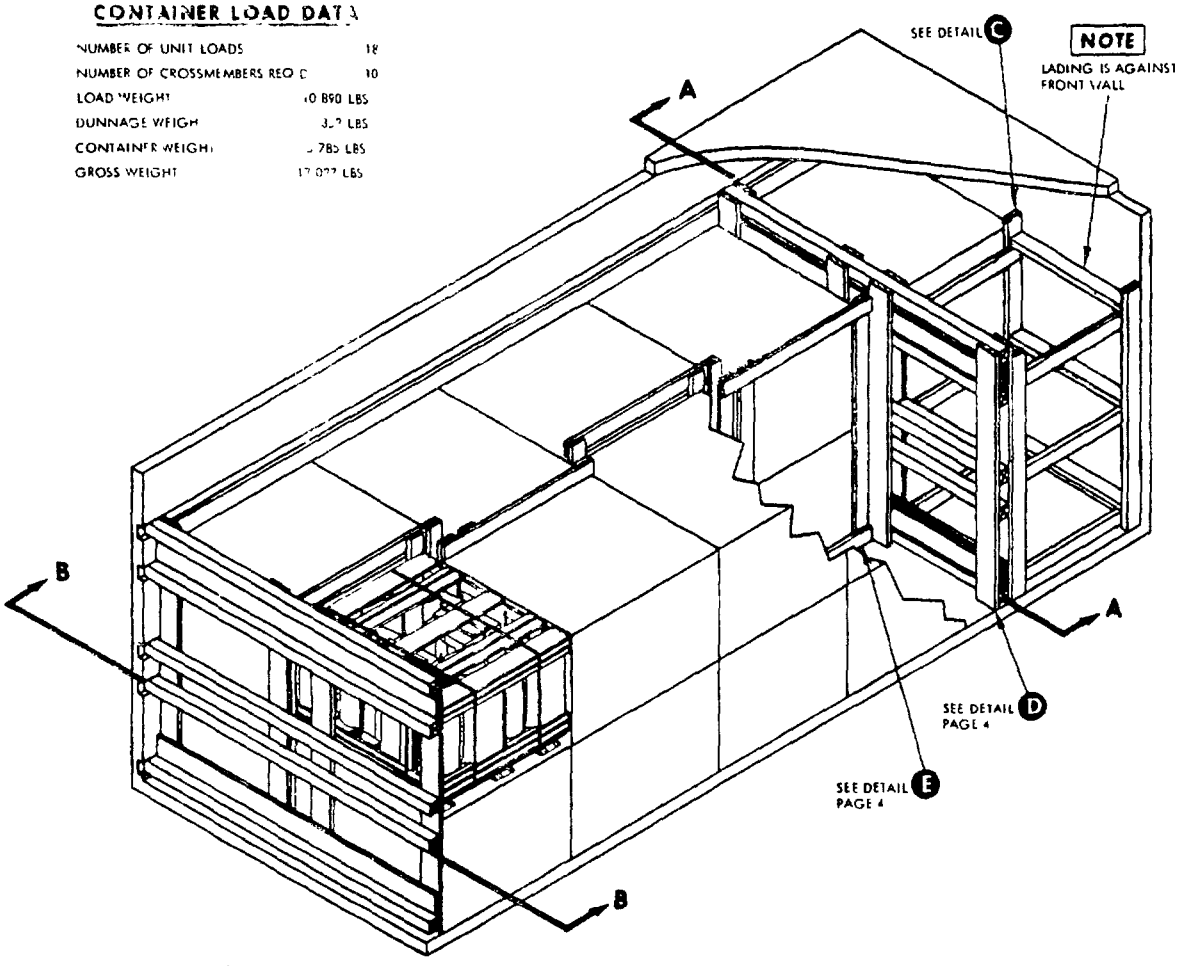


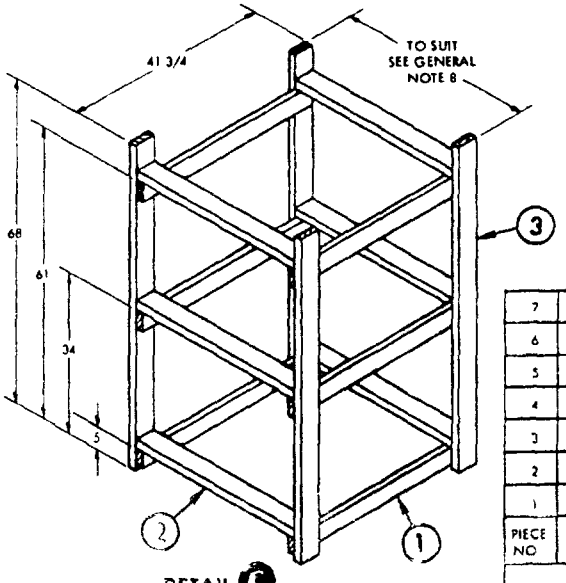

DETAIL C
SIDE FRAME ASSEMBLY
1 REQUIRED


PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NAILS NUMBER	NAILS SIZE
	LIST OF MATERIALS AND NAILING DATA					
7	VERTICAL	1 x 4 x 68	12	SEE 6	-	-
6	HORIZONTAL	1 x 4 x 48	8	7	3 PER JOINT	6d CLINCHED
5	VERTICAL	1 x 6 x 72	12	SEE 4	-	-
4	HORIZONTAL	1 x 6 x 90	6	5	3 PER JOINT	6d CLINCHED
3	SIDE FRAME VERTICAL	2 x 4 x 68	4	SEE 1	-	-
2	STRUT	2 x 4 x TO SUIT	6	TOENAIL TO 3	2 PER JOINT	10d
1	SIDE FRAME HORIZONTAL	2 x 4 x 41 3/4	6	3	3 PER JOINT	10d

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

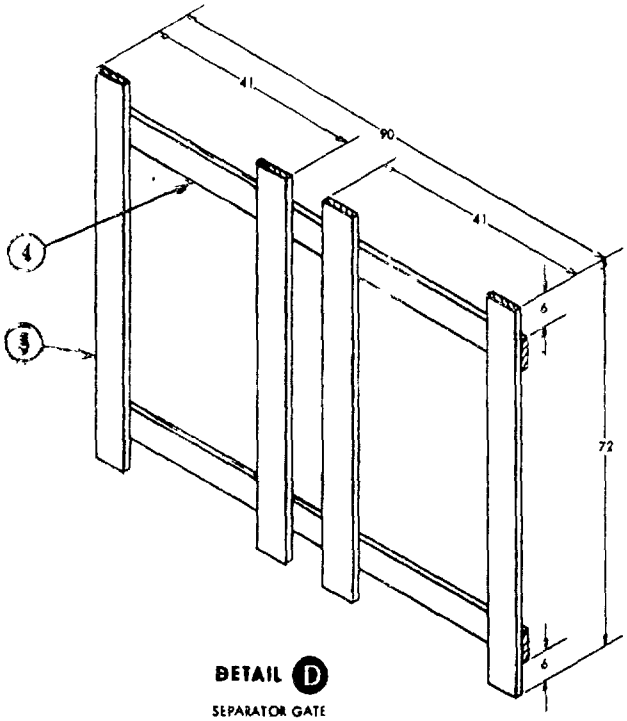


DETAIL D

SEPARATOR GATE
3 REQUIRED
POSITION VERTICAL
PIECES AGAINST UNIT LOAD

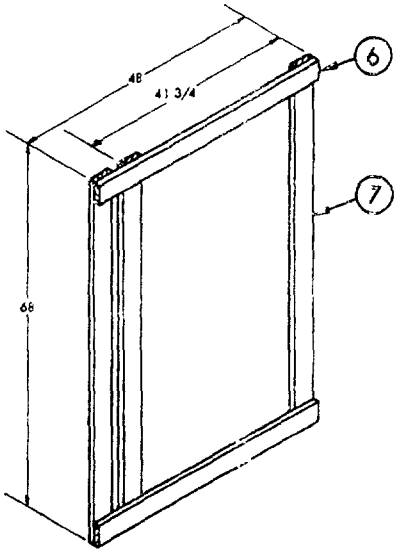

DETAIL E

FILLER ASSEMBLY
4 REQUIRED
SEE GENERAL NOTE 6

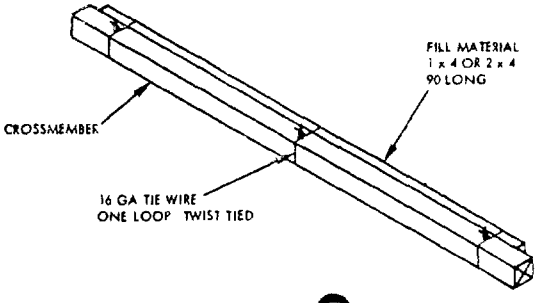

DETAIL F

FILL MATERIAL
SEE GENERAL NOTE 5

REVIEW ACTIVITY
NAVY - OS, AS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO 8140 N227)

☆U.S. GOVERNMENT PRINTING OFFICE 1974—713-151/4010

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION

MIL-STD-1396-38(NAVY)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD, FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N-0102-014-1801 C-E0264

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

DOD 316

OFFICIAL BUSINESS

Commanding Officer
Naval Ammunition Depot Earle
Naval Weapons Handling Laboratory
Colts Neck, New Jersey 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.