MILITARY STANDARD

MIL-STD-1386 (Navy)


AUGUST 19

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

GP, GENERAL PURPOSE MK 82 AND MOD3 (500 LBS)
AIR FORCE UNIT LOAD
(WITH PLASTIC NOSE PLUG)

UNIT LOAD DATA

UNIT LOAD DRAWING TPO 1325-294-4152, REV R
WEIGHT . . . . . 3096 LBS
DIMENSIONS 51 3/4 L x 33 1/4 W x 31 1/2 H
CUBE . . 37.4 CU FT
DOT HAZARD CLASSIFICATION. EXPLOSIVE A
COAST GUARD CLASS A

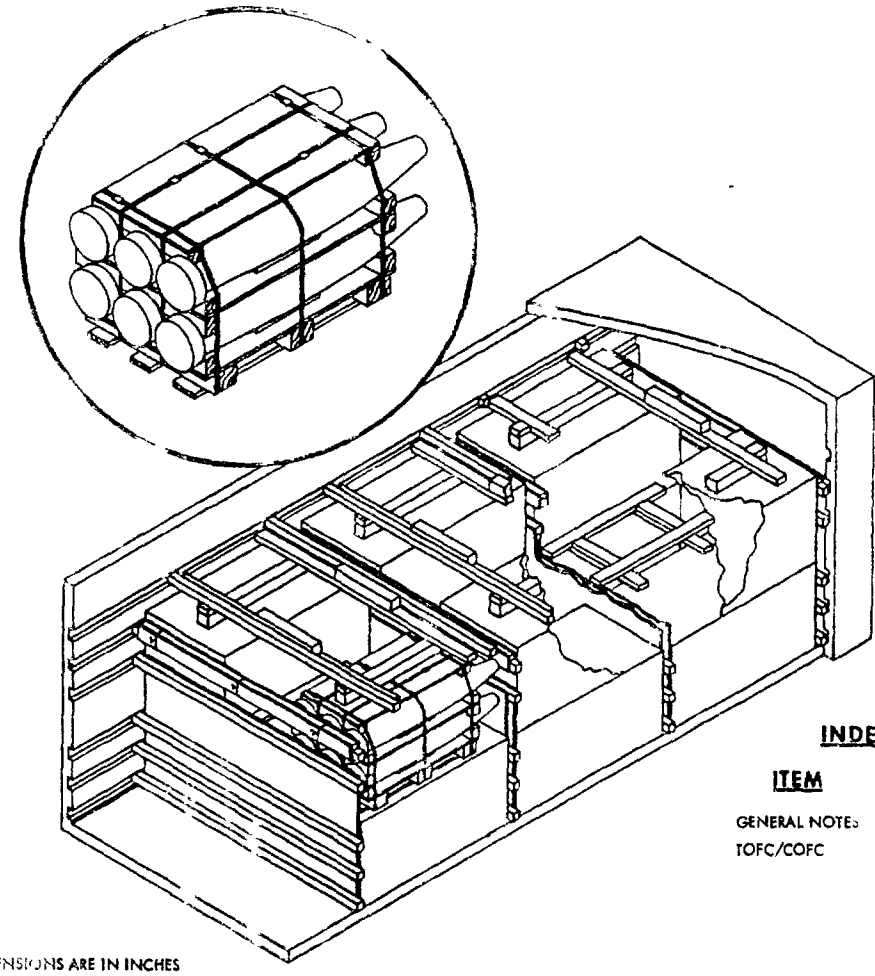

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC	2, 3 & 4

NOTES:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO COMPREHENSIVE INDEX NWHL NO 4200

AUTHORIZED FOR COFC, CONTAINERSHIP AND MOVEMENT ABOARD DEPOT (NON PUBLIC) ROADS ONLY.	APPROVED BY US COAST GUARD	APPROVED BY BUREAU OF EXPLOSIVES
NAME (MTMC) 8/1/72 DATE	R J Schwing Capt USCG	A F Grassmuck
SIGNATURE (MTMC) SYSCOM BY DIRECTION 8/1/72 DATE	DATE 7 19 72	DATE 7/25/72

ORIGINATOR [illegible] NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH AIR FORCE UNIT LOADS OF 500 LB MK 82 LOW DRAG BOMBS. THE UNIT LOAD SHALL BE IN ACCORDANCE WITH TPO 1325-294-4152 REV R, S, T, AND U

2 THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT SATISFIES THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C AND SHIPPED ON FLAT CARS THAT MEET THE REQUIREMENTS OF PAMPHLET 6C IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHT FROM THE CONTAINER FLOOR

4 CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

5 THE DUNNAGE SPECIFIED IS OF NOMINAL SIZE. FOR EXAMPLE, 1 x 4 MATERIAL IS ACTUALLY 3/4 THICK BY 3 3/8 WIDE AND 2 x 6 MATERIAL IS ACTUALLY 1 5/8 THICK BY 5 1/2 WIDE

6 WHEN THE VOID BETWEEN THE CROSSMEMBER AND THE PLYWOOD SEPARATOR IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBERS AND GATE AS SHOWN IN DETAIL E, PAGE 4

7 SHIM, PIECE 7, IS THICKNESS TO SUIT AND MAY BE ADDED TO OR OMITTED AS REQUIRED TO SECURE LADING

8. APPLICABLE MATERIAL SPECIFICATIONS
   DUNNAGE LUMBER, MM-L-751,
   NAILS, FF-N-105, COMMON CEMENT COATED,
   PLYWOOD, COMMERCIAL STANDARD CS45, GRADE INTERIOR C-D

9 SWAY BRACE DETAIL C IS ASSEMBLED IN PLACE. PIECE 8 IS POSITIONED INBOARD OF THE BASE END AND NOSE END OF PALLET SKIDS. WITH PIECES 10 AGAINST PALLET SKIDS, NAIL TO PIECE 8 WITH THREE 10d NAILS PER JOINT. CUT PIECE 9 TO FIT BETWEEN PIECES 10 AND NAIL TO PIECE 8 WITH THREE 10d NAILS.

10 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA, CLOSE AND SEAL CONTAINER DOORS, AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF THE CONTAINER FOR THE APPROPRIATE MODE OF TRANSPORTATION AS PRESCRIBED IN OP 2165 (VOL 1)


COFC AND CONTAINERSHIP

1 THE CONTAINER LOAD CONSISTS OF 12 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT


WARNING

BECAUSE THE WEIGHT LOADED INTO THIS CONTAINER EXCEEDS 34,000 LBS, THE MILVAN CHASSIS CAN NOT BE USED TO TRANSPOPT THE LOADED CONTAINER ON PUBLIC HIGHWAYS. THE LOADED CONTAINER MAY BE TRANSPORTED OVER DEPOT ROADS USING A MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES OR COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY.

2 A SEPARATOR GATE OF DIMENSIONAL LUMBER MAY BE USED AS AN ALTERNATE FOR THE PLYWOOD SEPARATOR, PIECE 1, AND THE FILLER ASSEMBLY, DETAIL F. SEE DETAIL G, PAGE 5.

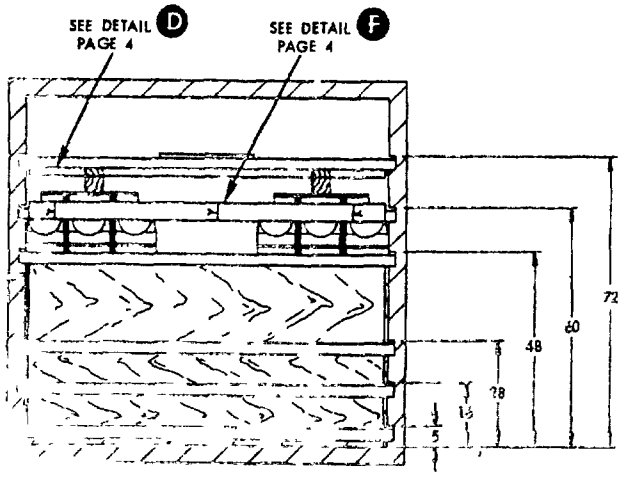

SECTION A-A

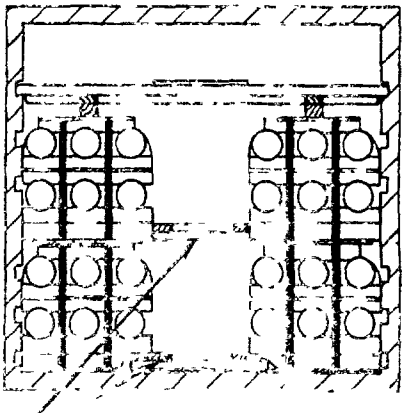


SECTION B

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

CONTAINER DATA


NUMBER OF CROSSMEMBERS	10
LOAD WEIGHT	37,152 LBS
DUNNAGE WEIGHT	650 LBS
CONTAINER WEIGHT	5,700 LBS
GROSS WEIGHT	43,502 LBS

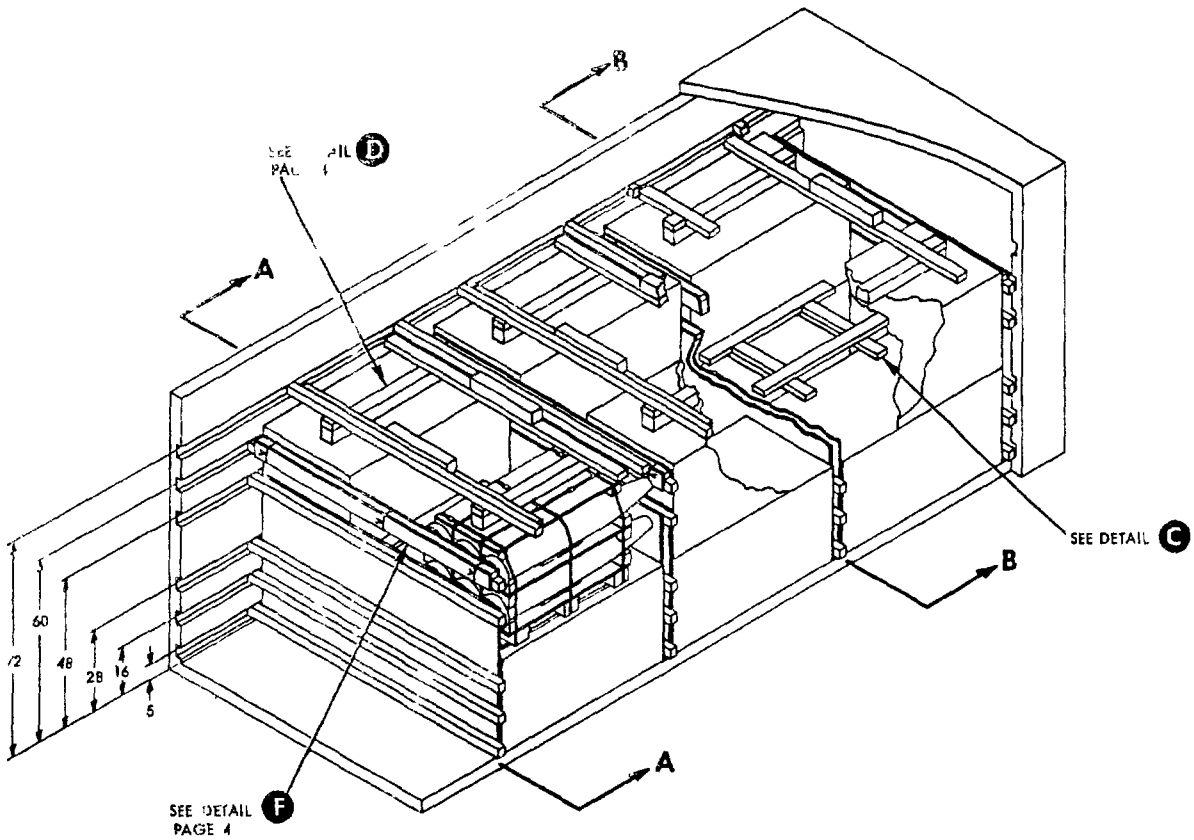

* = ACTUAL MEASUREMENT

PIECE NO	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	EL	NAILS NUMBER	NAILS SIZE
10	STRINGER	2 x 4 x 48	12	8	3/JOINT	10d
9	SPACER	2 x 4 TO SUIT	12	6	3	10d
8	SUPPORT	2 x 4 x 40	12	SEE 9 & 10	-	-
7	SHIM	4" WIDE x 5 3/4 THICKNESS TO SUIT	12	6	3	10d
6	HOLD DOWN	4 x 4 x 48	6	SEE 5	-	-
5	TIE PIECE	2 x 4 x 90	6	6 4	3/JOINT 3	10d 10d
4	RETAINER	4 x 4 x 24	6	SEE 5	-	-
3	SPACER	2 x 2 1/2* x 90	4	SEE 2	-	-
2	SHIM (PLYWOOD)	1/2 x 4 3/4* x 90	8	3	6	10d
1	SEPARATOR (PLYWOOD)	1/2 x 48 x 90	6	-	-	-


LIST OF MATERIALS & NAILING DATA

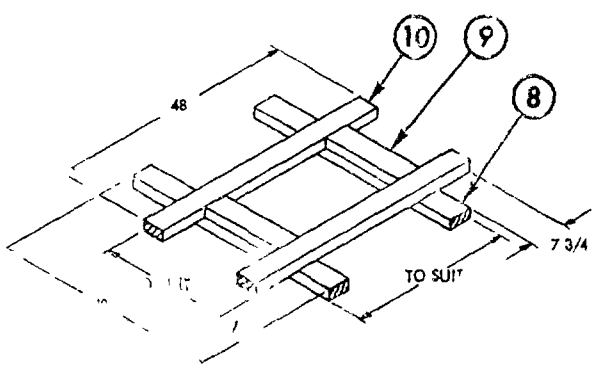

DETAIL C

SCALE: 1 INCH EQUIRED


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

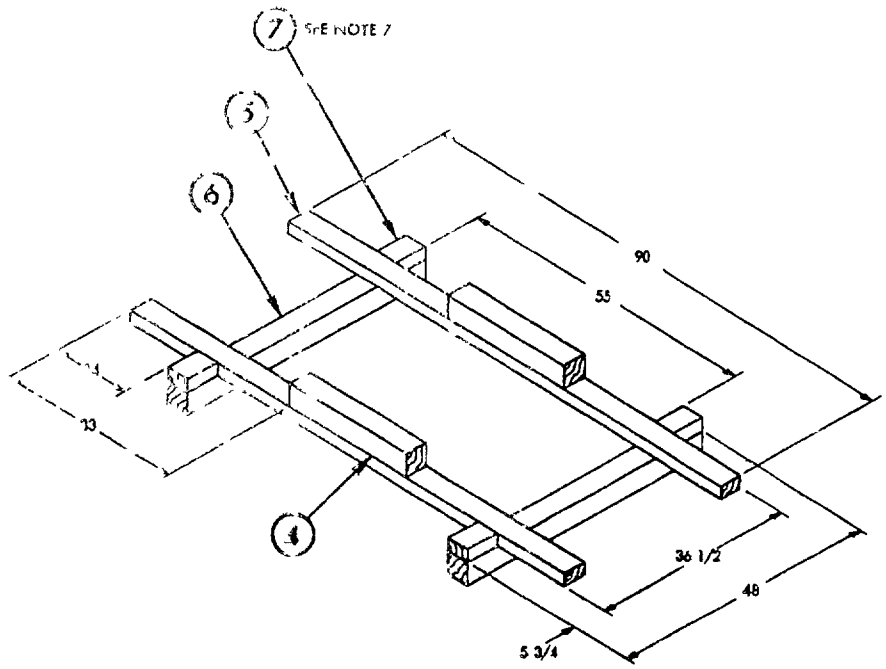


DETAIL D

HOLD DOWN 3 REQUIRED

* CW = CONTAINER WIDTH

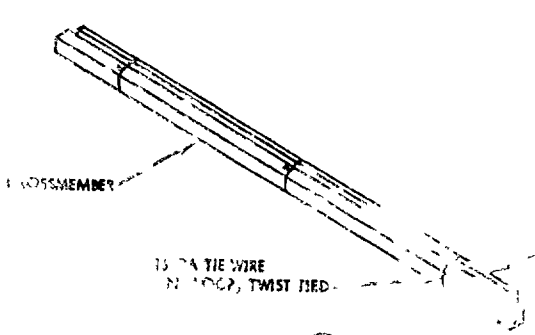

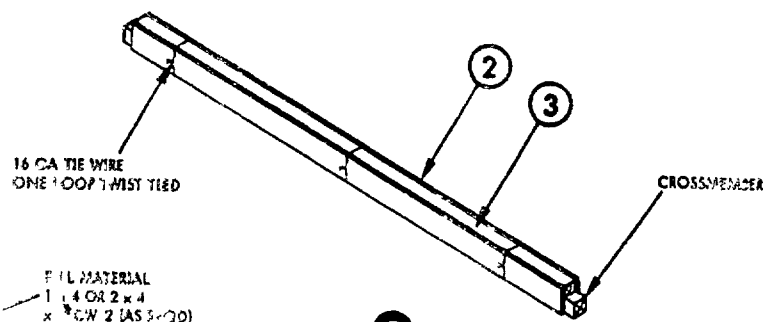

DETAIL F


ROLLER ASSEMBLY 4 REQUIRED
SEE ALTERNATE SEPARATOR DATA
INSTRUCTIONS, PAGE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

ALTERNATE SEPARATOR GATE

A SEPARATOR GATE OF 1 x 6 DIMENSIONAL LUMBER MAY BE USED AS AN ALTERNATE FOR THE PLYWOOD SEPARATOR. WHEN USING ALTERNATE GATE, DO NOT USE FILLER ASSEMBLY, DETAIL F, ON THE 60 INCH HIGH CROSS MEMBERS

POSITION SEPARATOR GATE WITH VERTICALS AGAINST UNIT LOAD

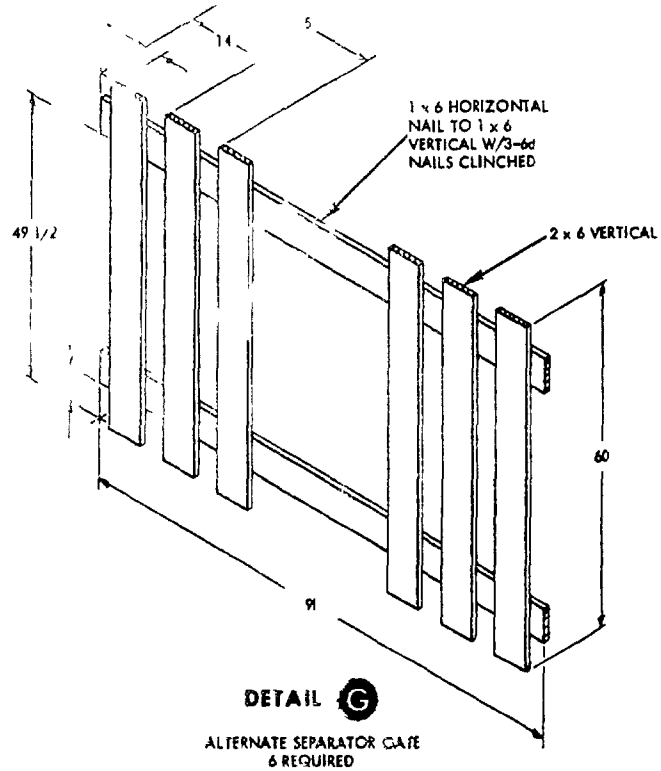

DETAIL G

ALTERNATE SEPARATOR GATE
6 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.