MILITARY STANDARD

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

CARTRIDGE, 7.62MM, BALL M80


AMPHIBIOUS UNIT LOAD

MIL-STD-1386-42 (NAVY)

18 JUNE 1974

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-55 5 & WR-55 6
DIMENSIONS	50 1/8 L x 43 1/4 W x 21 H
CUBE	26.3 CU FT
WEIGHT	SEE TABLE I
DOT HAZARD CLASSIFICATION	EXPLOSIVES C
COAST GUARD CLASS	I

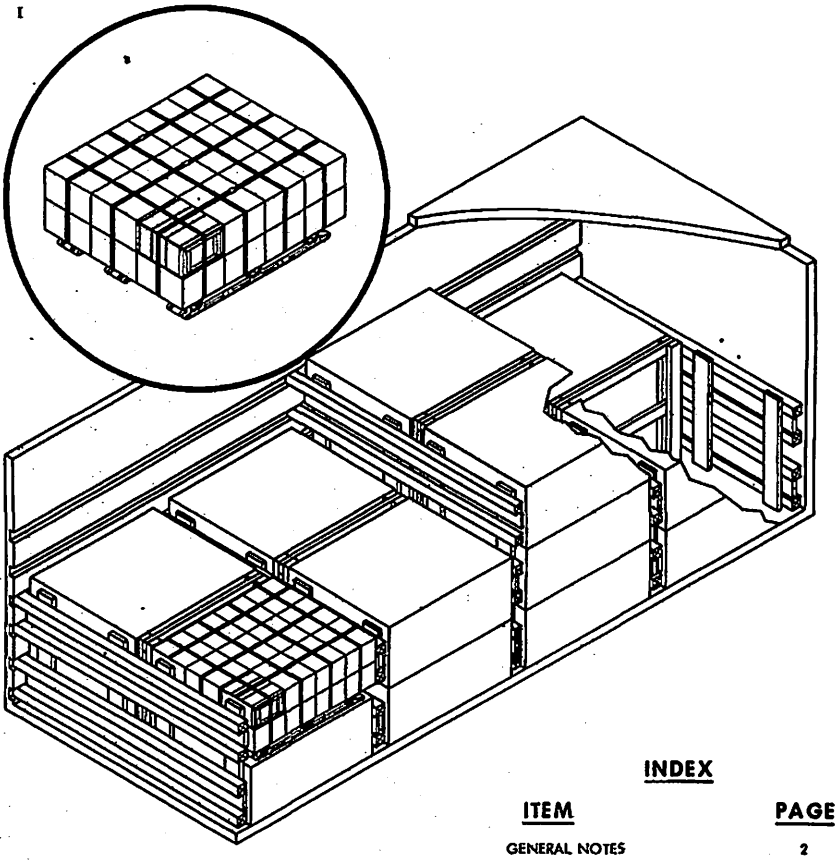

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC CONTAINERSHIP AND HIGHWAY	2 & 3
DETAILS	4

FSC 8140

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

M.S. Gray NWHE 6/17/74
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly 6/17/74
SIGNATURE ORDSYSCOM BY DIRECTION DATE

US COAST GUARD APPROVAL NOT REQUIRED

APPROVED BY BUREAU OF EXPLOSIVES

R. F. Brassmuck
DATE 6/10/74

ORIGINATOR L R Carings
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
N A D EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 202640-24T00:13Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH AMPHIBIOUS UNIT LOADS OF 7.62 MM BALL CARTRIDGES. THE UNIT LOADS SHALL BE PALLETIZED IN ACCORDANCE WITH WR-55 5 OR WR-55 6.
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C.
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72" AND 83" HEIGHTS FROM THE CONTAINER FLOOR.
4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.


5. WHEN LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND SEPARATOR GATE IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN THE CROSSMEMBER AND SEPARATOR GATE AS SHOWN IN DETAIL G, PAGE 4.
6. THICKNESS OF FILLER ASSEMBLIES, DETAILS E AND F, MAY BE VARIED TO FILL THE VOID BETWEEN UNIT LOADS.
7. APPLICABLE MATERIAL SPECIFICATIONS:
   DUNNAGE LUMBER - FED. SPEC. MM-L-751
   NAILS - FED. SPEC. FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT.
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL CONTAINER DOORS.

TOFC/COFC,CONTAINERSHIP AND HIGHWAY


1. THE CONTAINER LOAD CONSISTS OF 18 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT.
2. THE LOADED MILVAN CONTAINER SHALL BE ON A 20 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES WHEN BEING MOVED IN TOFC SERVICE.
3. WHEN THE LOADED CONTAINER IS IN TOFC OR COFC SERVICE, IT SHALL BE ON FLAT RAILCARS THAT COMPLY WITH BUREAU OF EXPLOSIVES PAMPHLET 6C.
4. THE LOADED MILVAN MAY BE MOVED OVER PUBLIC HIGHWAYS ON A 20 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES OR ON SUITABLE COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY.

NOTE

IN CERTAIN STATES THE GROSS VEHICLE WEIGHT (G.V.W.) IS LIMITED BY THE DISTANCE BETWEEN THE AXLES OF THE ASSEMBLED RIG. CARE SHOULD BE TAKEN TO SEE THAT THE PROPOSED G.V.W. DOES NOT EXCEED THESE LIMITATIONS.

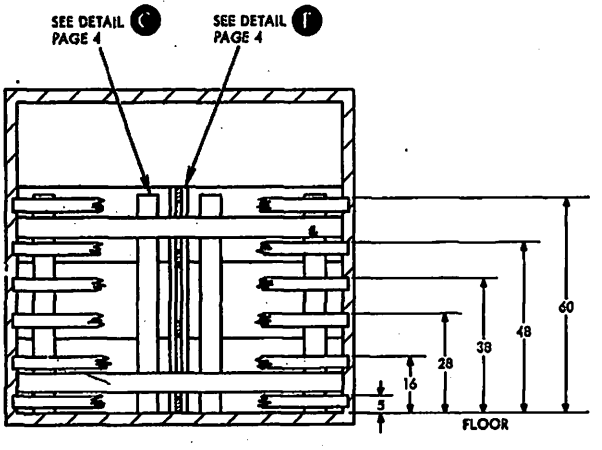

SECTION A-A

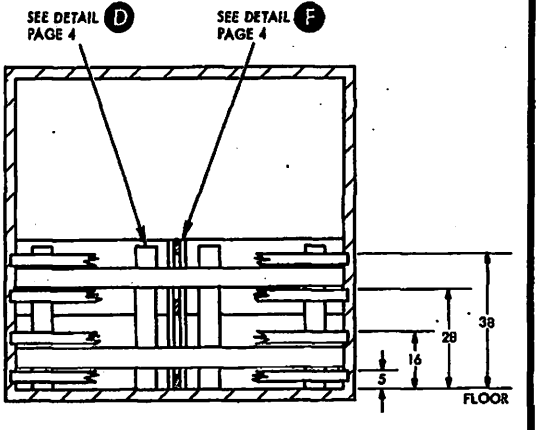


SECTION B-B

Source: https://assist.dla.mil -- Downloaded: 202640-24T00:13Z
Check the source to verify that this is the current version before use.

TABLE I

WR-557	DESCRIPTION	UNIT LOAD WEIGHT (LBS)	CONTAINER LOAD WEIGHT* (LBS)	CONTAINER GROSS WEIGHT* (LBS)
5A	CLIPS IN BANDOLIERS AND M2A1 BOX	1738	31,284	37,536
6A	CLIPS IN BANDOLIERS WITH MAGAZINE FILLER IN M2A1 BOX	1812	32,616	38,868

*APPROXIMATE

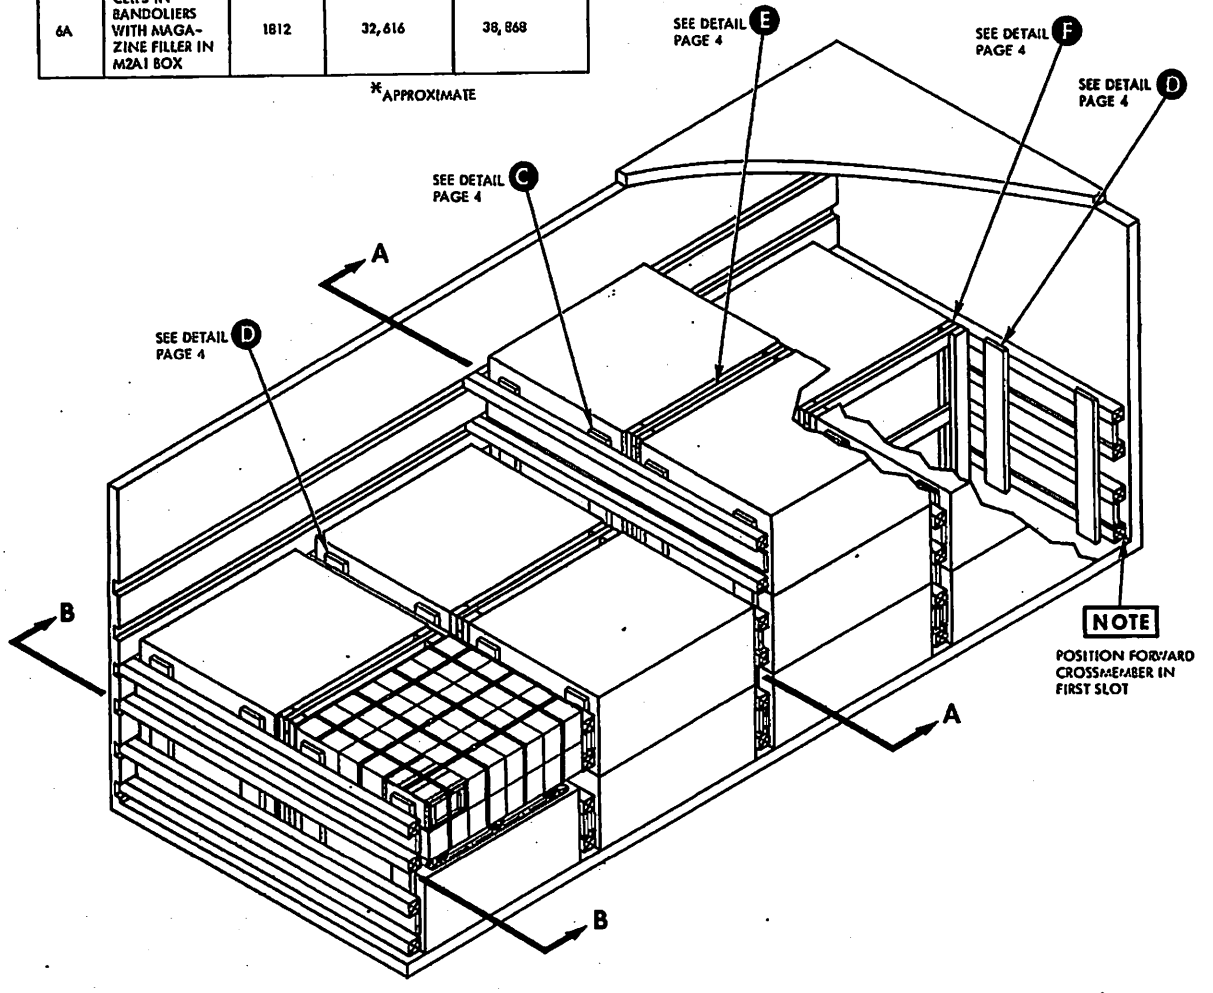


CONTAINER LOAD DATA

NUMBER OF UNIT LOADS 18
NUMBER OF CROSSMEMBERS REQ'D 24
LOAD WEIGHT..... SEE TABLE I
DUNNAGE WEIGHT ..... 467 LBS
CONTAINER WEIGHT ..... 5785 LBS
GROSS WEIGHT..... SEE TABLE I

PIECE NO.	DESCRIPTION	SIZE	NO. PCS REQD	NAIL TO	NUMBER NAILS	SIZE
8	UPRIGHT	2 x 4 x 42	12	7	3 JOINT	6d
7	LONGITUDINAL	1 x 4 x 48	9	SEE 8	-	-
6	UPRIGHT	2 x 4 x 63	4	5	3 JOINT	6d
5	LONGITUDINAL	1 x 4 x 48	4	SEE 6	-	-
4	HORIZONTAL	1 x 6 x 90	12	3	3 JOINT	6d CLINCHED
3	VERTICAL	1 x 6 x 40	24	SEE 4	-	-
2	HORIZONTAL	1 x 6 x 90	4	1	3 JOINT	6d CLINCHED
1	VERTICAL	1 x 6 x 61	8	SEE 2	-	-


LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 202640-24T00:13Z
Check the source to verify that this is the current version before use.

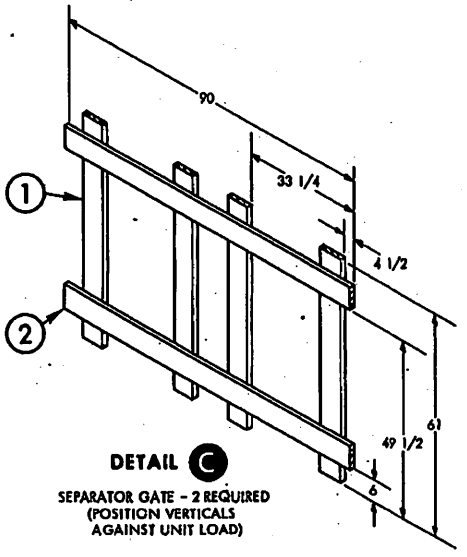


DETAIL C

SEPARATOR GATE - 2 REQUIRED
(POSITION VERTICALS
AGAINST UNIT LOAD)

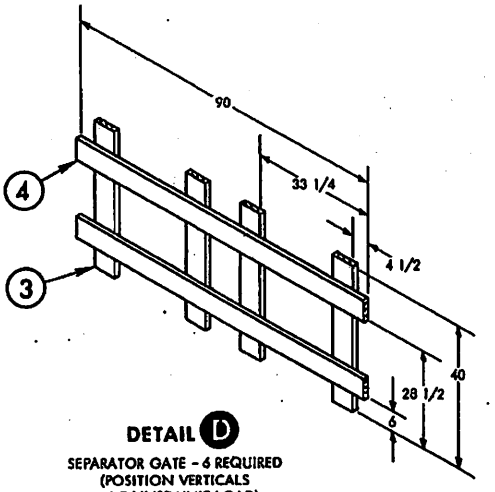


DETAIL D

SEPARATOR GATE - 6 REQUIRED
(POSITION VERTICALS
AGAINST UNIT LOAD)

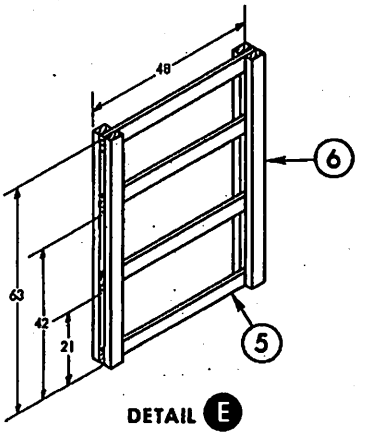


DETAIL E

FILLER ASSEMBLY
1 REQUIRED
SEE GENERAL NOTE 6

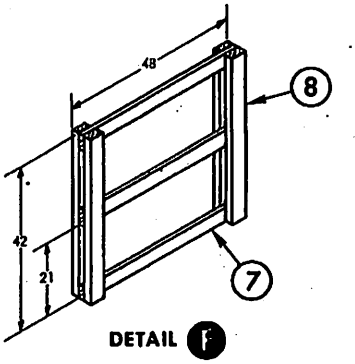

DETAIL F

FILLER ASSEMBLY
3 REQUIRED
SEE GENERAL NOTE 6

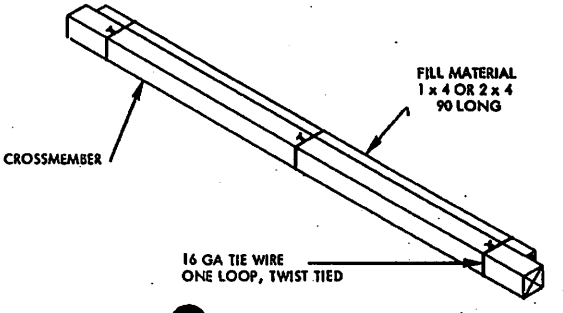

DETAIL G

FILL MATERIAL
SEE GENERAL NOTE 5

REVIEW ACTIVITY:
NAVY - OS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-N231)

Source: https://assist.dla.mil -- Downloaded: 202610-24T00:13Z
Check the source to verify that this is the current version before use.