A-A-55485/4
September 30, 1993
SUPERSEDING
MIL-M-38527/4B
December 15, 1988

COMMERCIAL ITEM DESCRIPTION

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, LEAD CONVERSION, .200 OR .230 DIAMETER PIN CENTER TO A LARGER DIAMETER

The General Services Administration has authorized the use of this commercial item description (CID) in preference to MIL-M-38527/4B.

Abstract. This CID covers mounting pads with pin through-holes beginning on a .200 or .230 diameter circle and tapering at an angle to a larger exit diameter circle.

Part or Identifying Number (PIN). The PIN shall be A-55485/04- (plus a dash number from figure 1 and a material letter as shown below). Complete PIN example: A-55485/04-001D.

Salient characteristics.

Material. Material shall be diallyl phthalate (D) or nylon (N).

Configurations and dimensions. Configurations and dimensions shall be as specified on figure 1.

Regulatory requirements. This section is not applicable to this CID.

Quality assurance provisions. Quality assurance provisions shall be as specified in A-A-55485.

Packaging. Packaging shall be as specified in A-A-55485.

Suggested sources of supply. Suggested sources of supply are shown in table I.

Supersession data. Supersession data shall be as specified in table II.

Notes. The following information may be useful in acquiring the items described, but is not directive in nature.


Ordering data. Ordering data shall be as specified in A-A-55485.

Comments Comments and requests for changes to this CID should be directed to Defense Electronics Supply Center, ATTN DESC-EMM, 1507 Wilmington Pike, Dayton, OH 45444-5270, telephone (513) 296-5255, FAX (513) 296-8868.

AMSC N/A FSC 5999

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

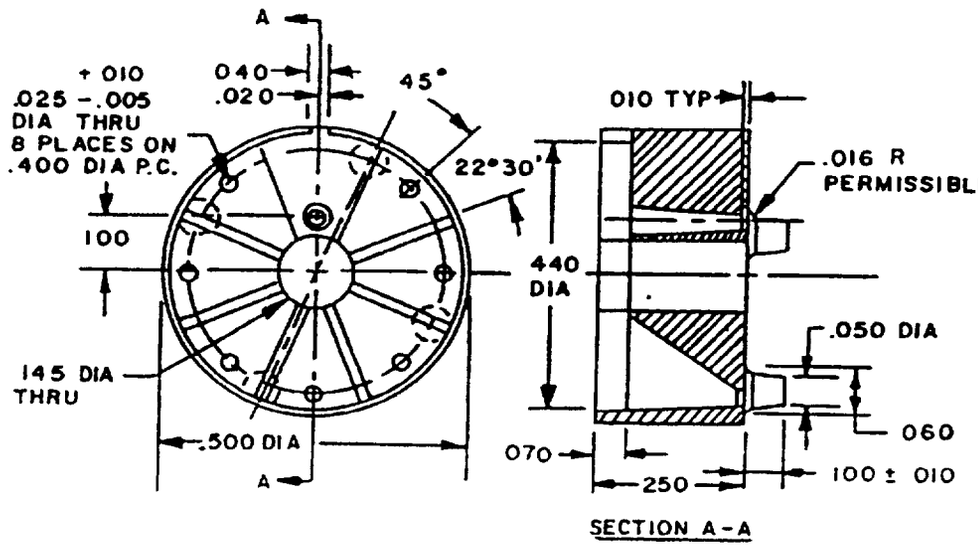


Inches	mm
.005	0.13
.010	0.25
.016	0.41
.020	0.51
.025	0.64
.040	1.02
.045	1.14
.050	1.27
.060	1.52
.070	1.78
.100	2.54
.250	6.35
.400	10.16
.440	11.18
.500	12.70

A-55485/04-001

Figure 1 Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

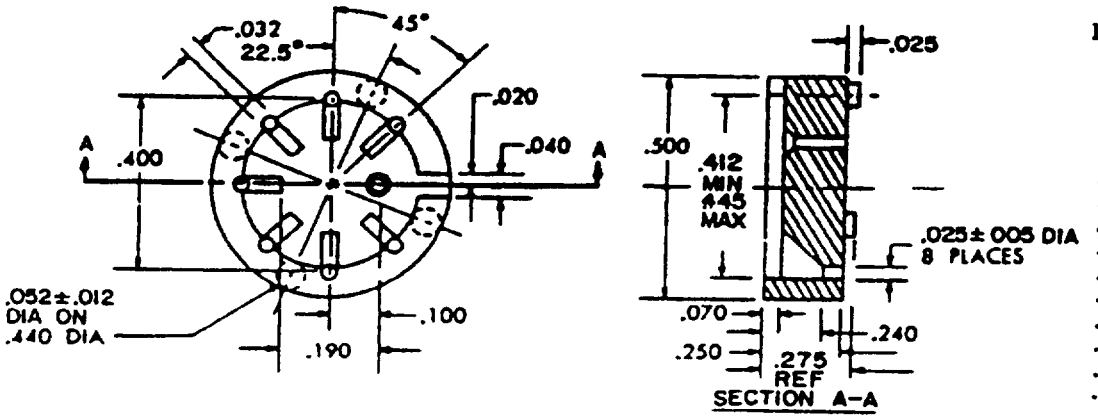


A-55485/04-002

Inches	mm
.005	0.13
.012	0.30
.020	0.51
.025	0.64
.032	0.81
.040	1.02
.052	1.32
.070	1.78
.100	2.54
.190	4.83
.240	6.10
.250	6.35
.275	6.99
.400	10.16
.412	10.46
.440	11.18
.445	11.30
.500	12.70


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

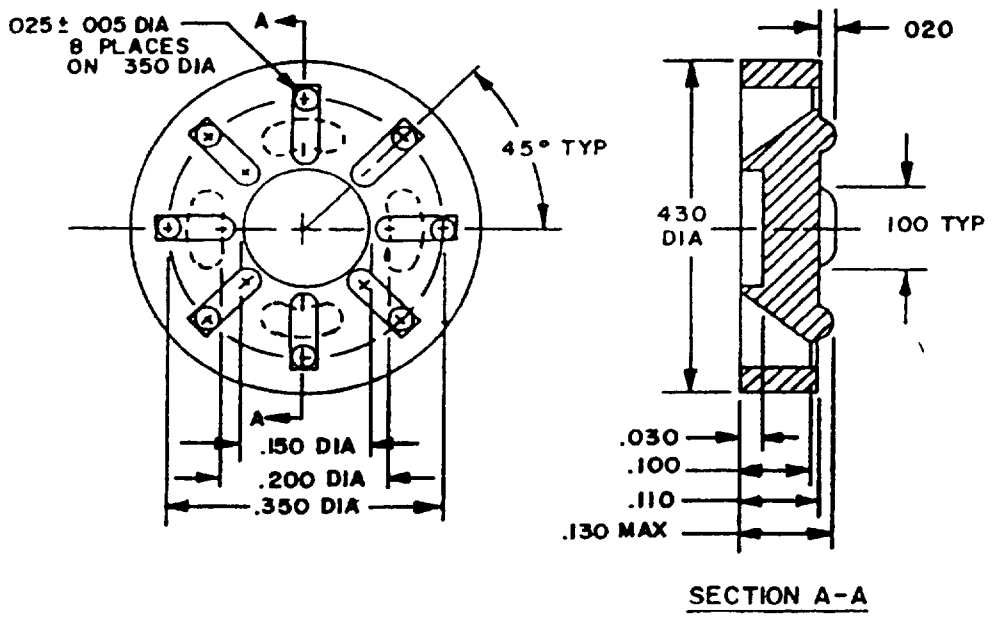

Inches	mm
.005	0.13
.020	0.51
.025	0.64
.030	0.76
.100	2.54
.110	2.79
.130	3.30
.150	3.81
.200	5.08
.350	8.89
.430	10.92

A-55485/04-003

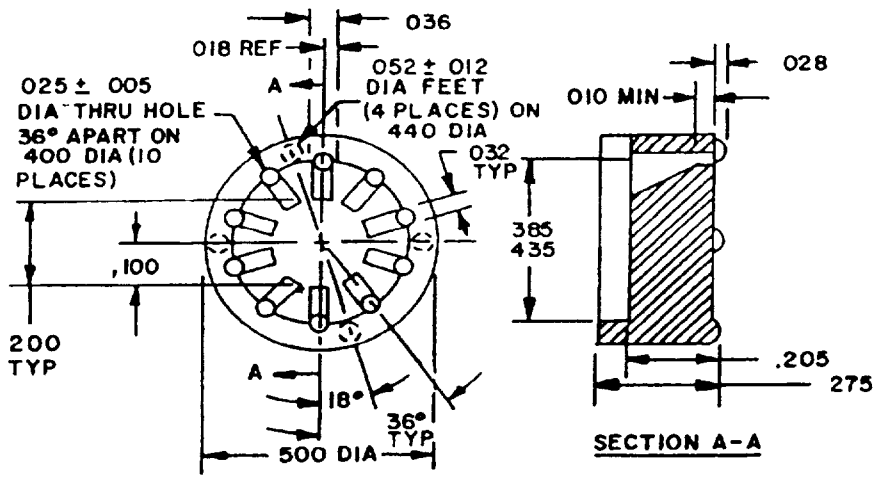


Inches	mm
.002	0.05
.005	0.13
.010	0.25
.012	0.30
.018	0.46
.025	0.64
.028	0.71
.032	0.81
.036	0.91
.052	1.32
.100	2.54
.200	5.08
.205	5.21
.275	6.99
.385	9.78
.400	10.16
.435	11.05
.440	11.18
.500	12.70


A-55485/04-004

Figure 1 Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

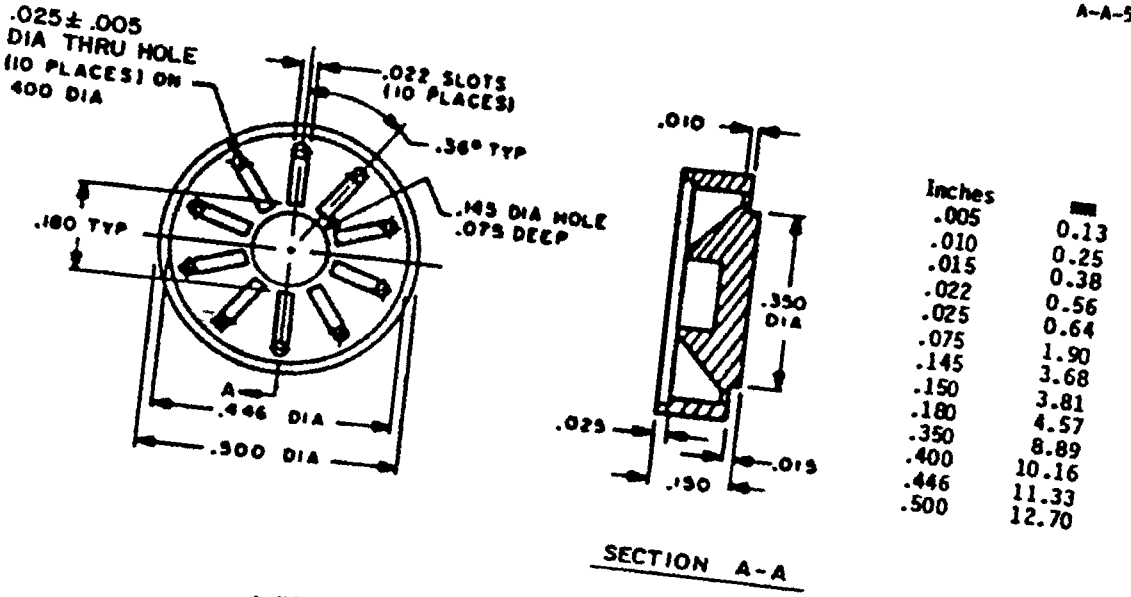


A-55485/04-005

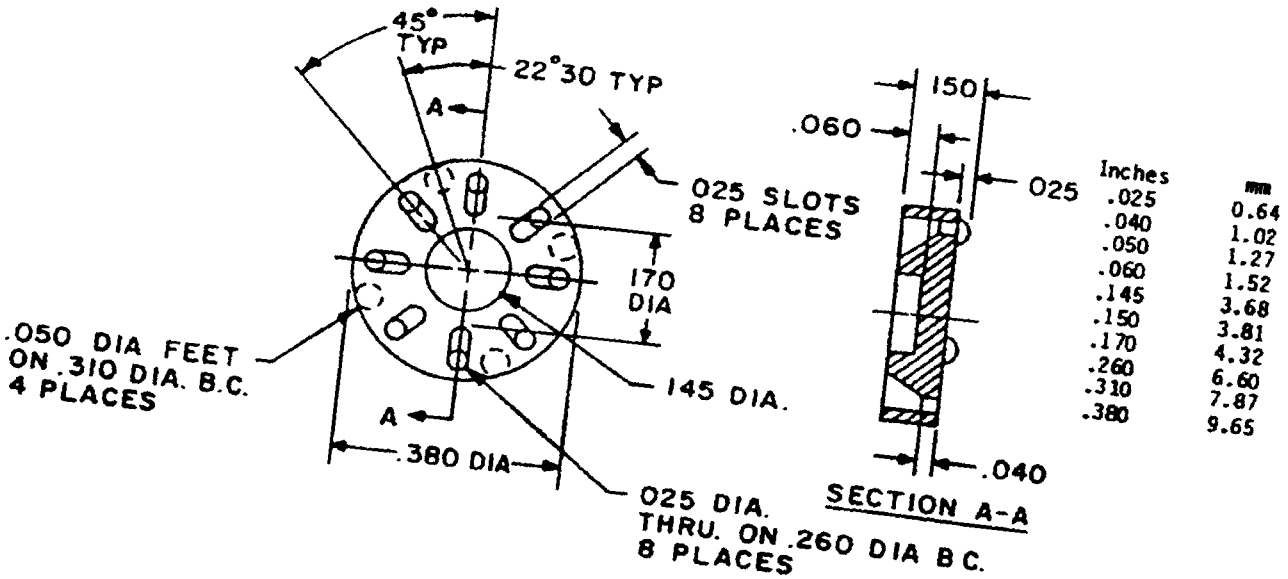


A-55485/04-006

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

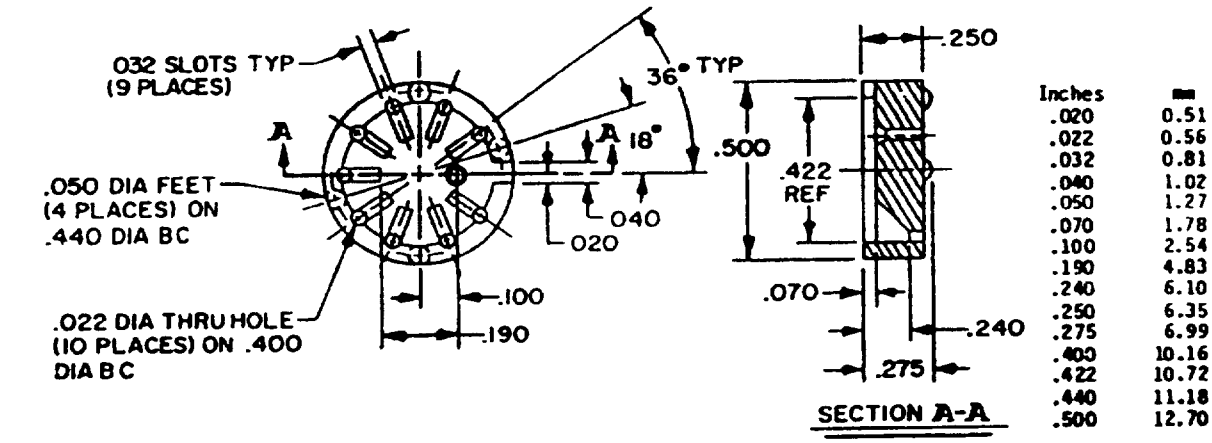


A-55485/04-007

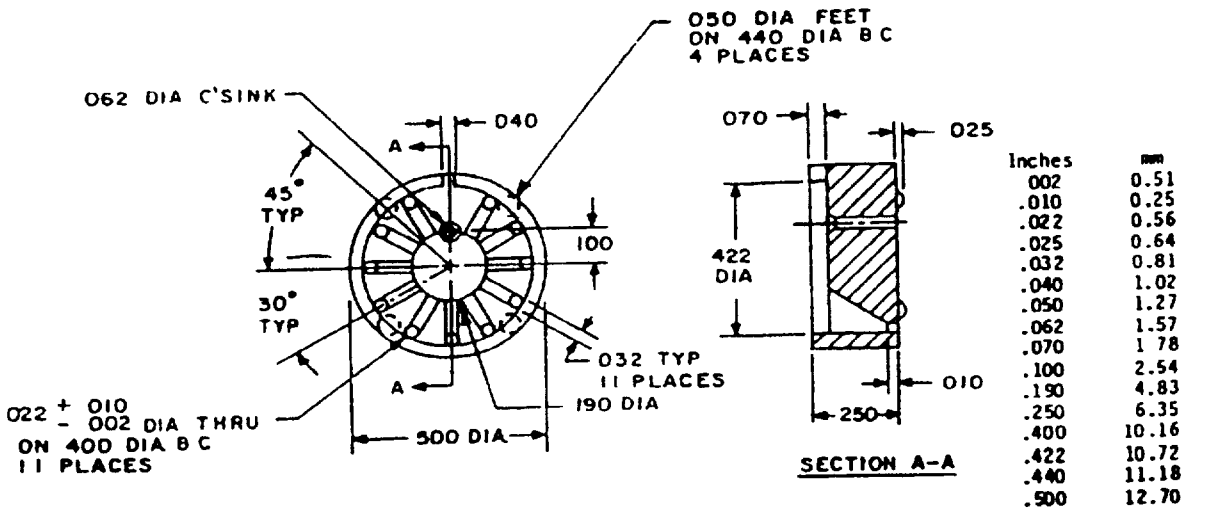

A-55485/04-008


Figure 1 Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

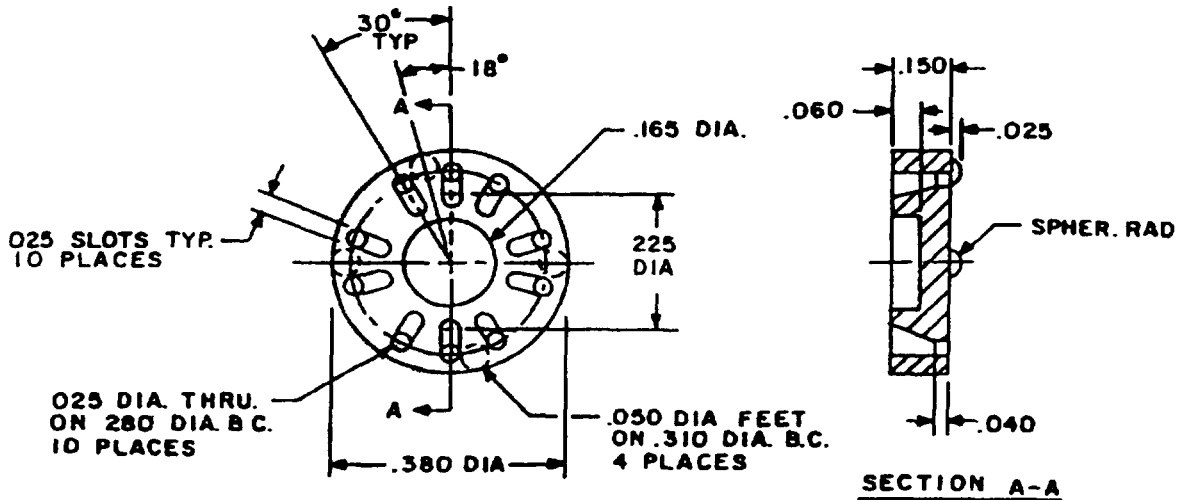

Inches	mm
.025	0.64
.040	1.02
.050	1.27
.060	1.52
.150	3.81
.165	4.19
.225	5.72
.280	7.11
.310	7.87
.380	9.65

A-55485/04-009

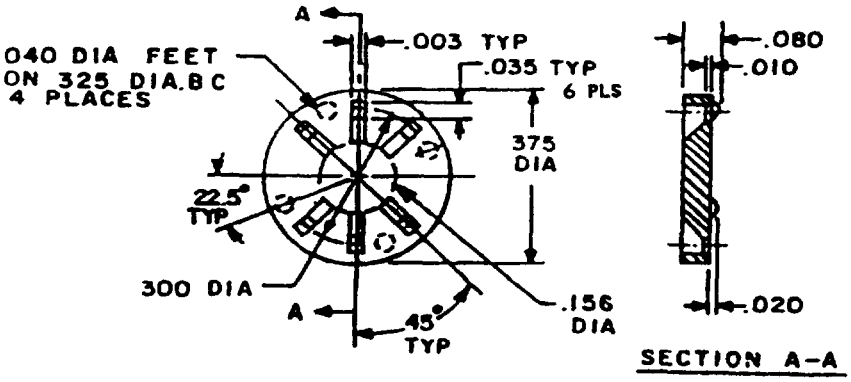


Inches	mm
.010	0.25
.020	0.51
.030	0.76
.035	0.89
.040	1.02
.080	2.03
.156	3.96
.300	7.62
.325	8.26
.375	9.53


A-55485/04-010

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

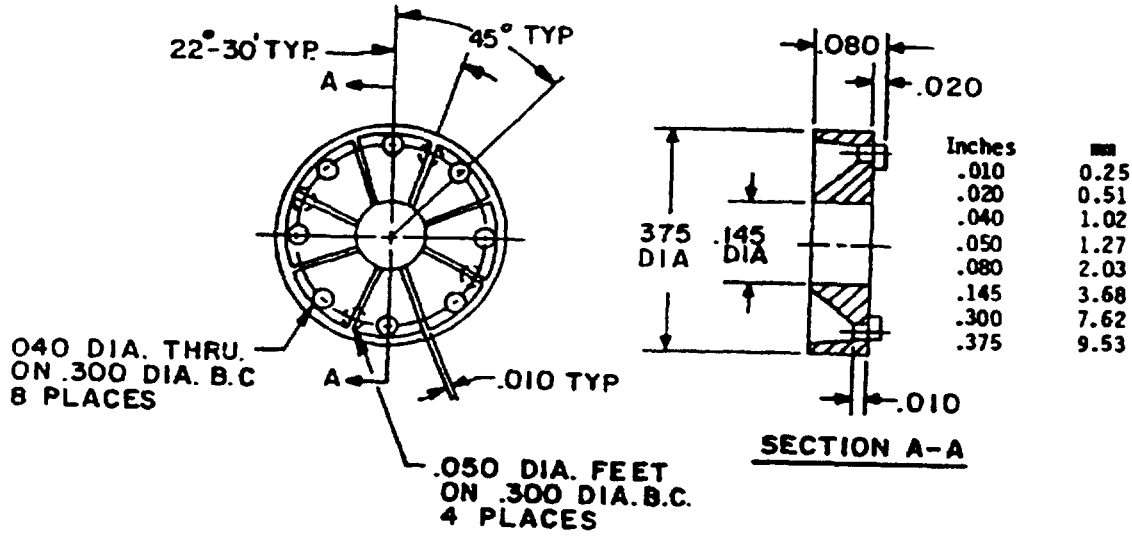


A-55485/04-011

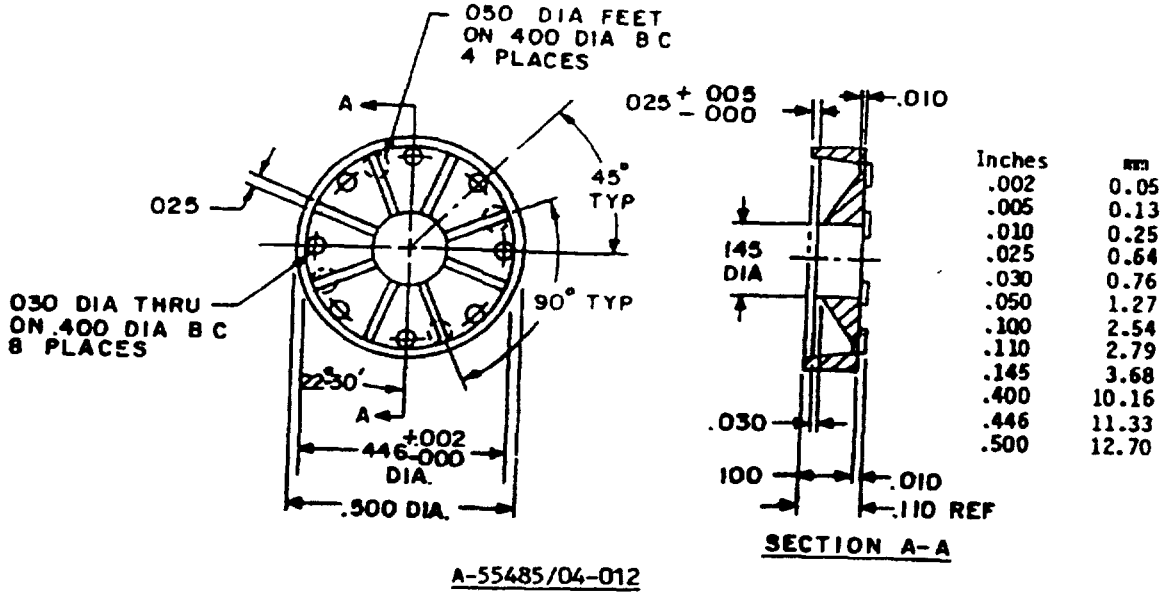


A-55485/04-012

Figure 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

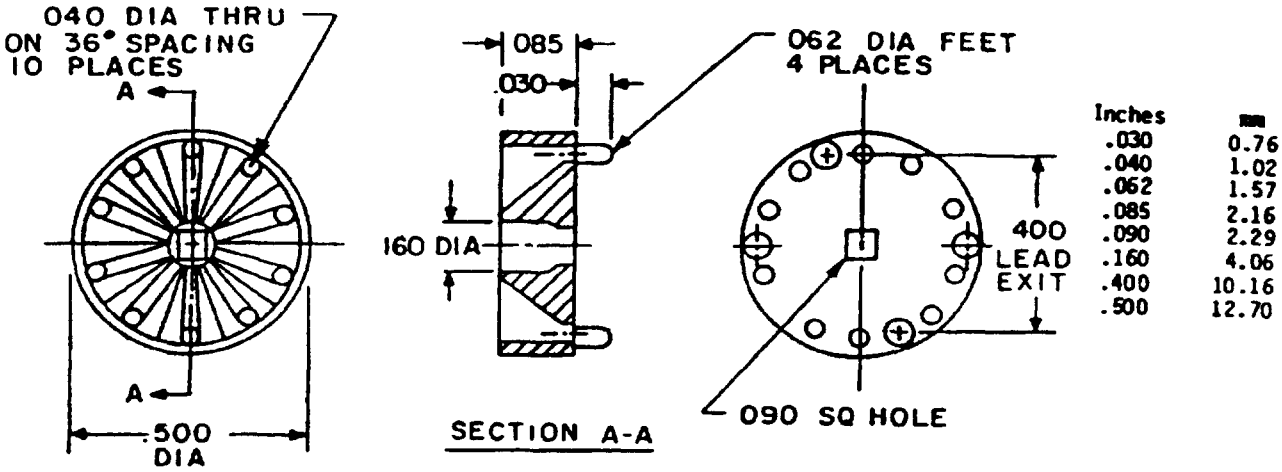


A-55485/04-013

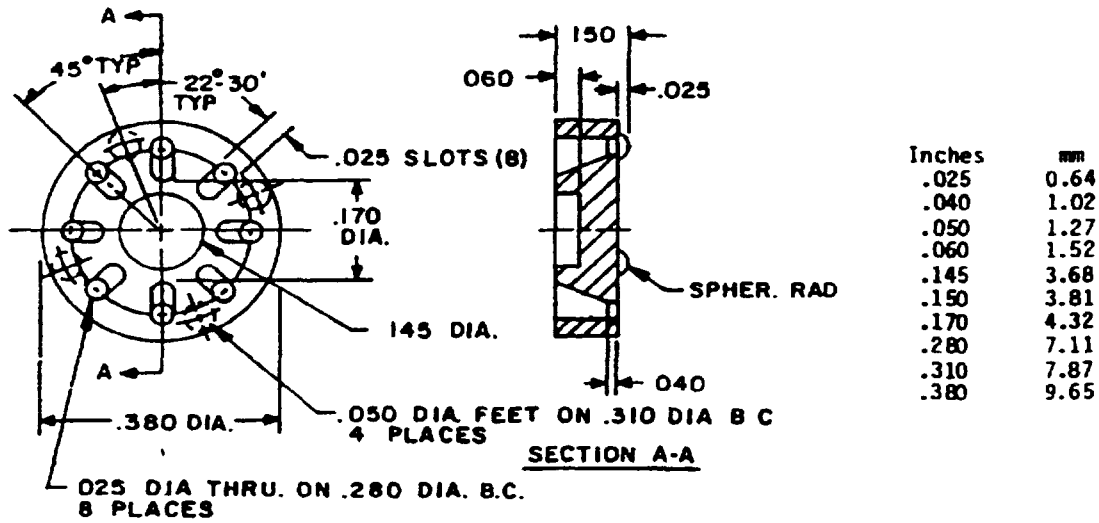

A-55485/04-014

Figure 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

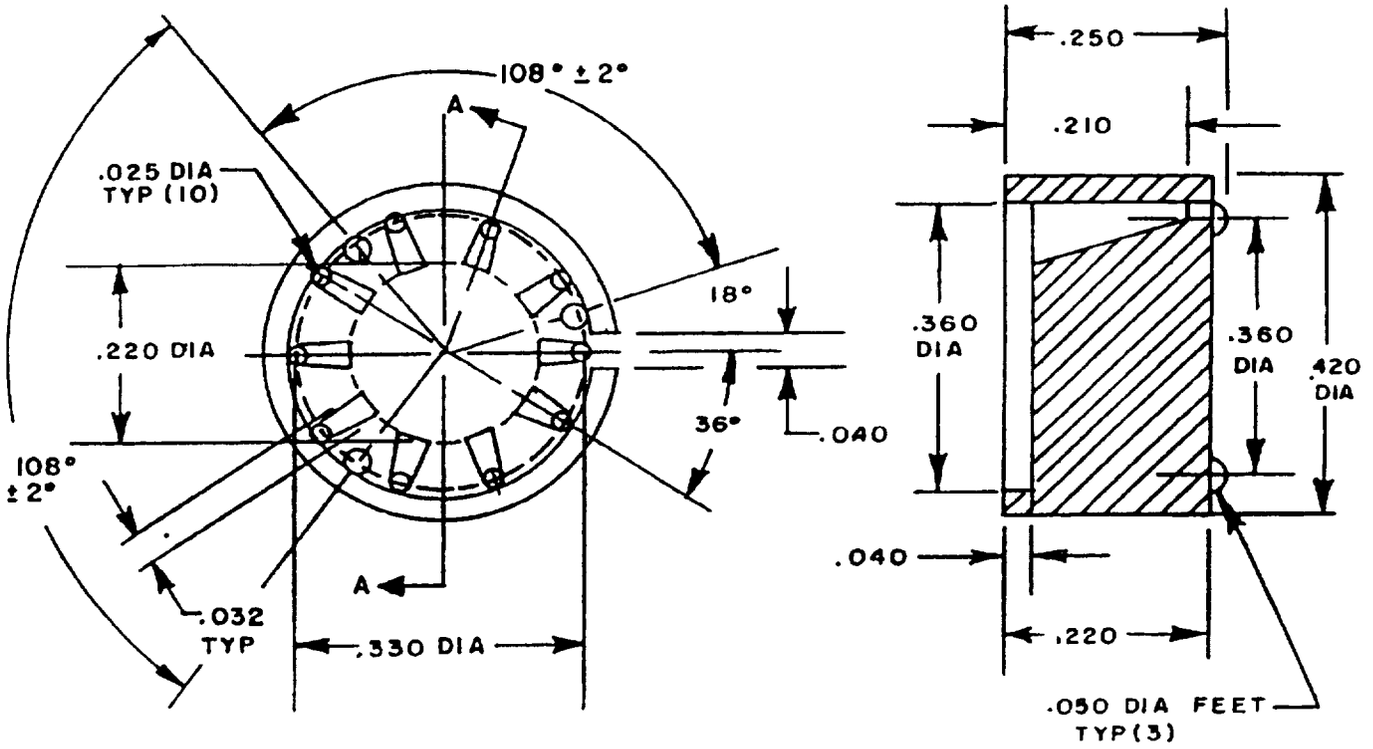


Inches	mm
.025	0.64
.032	0.81
.040	1.02
.050	1.27
.210	5.33
.220	5.59
.250	6.35
.330	8.38
.360	9.14
.420	10.67

A-55485/04-015

Figure 1. Configurations and dimensions - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

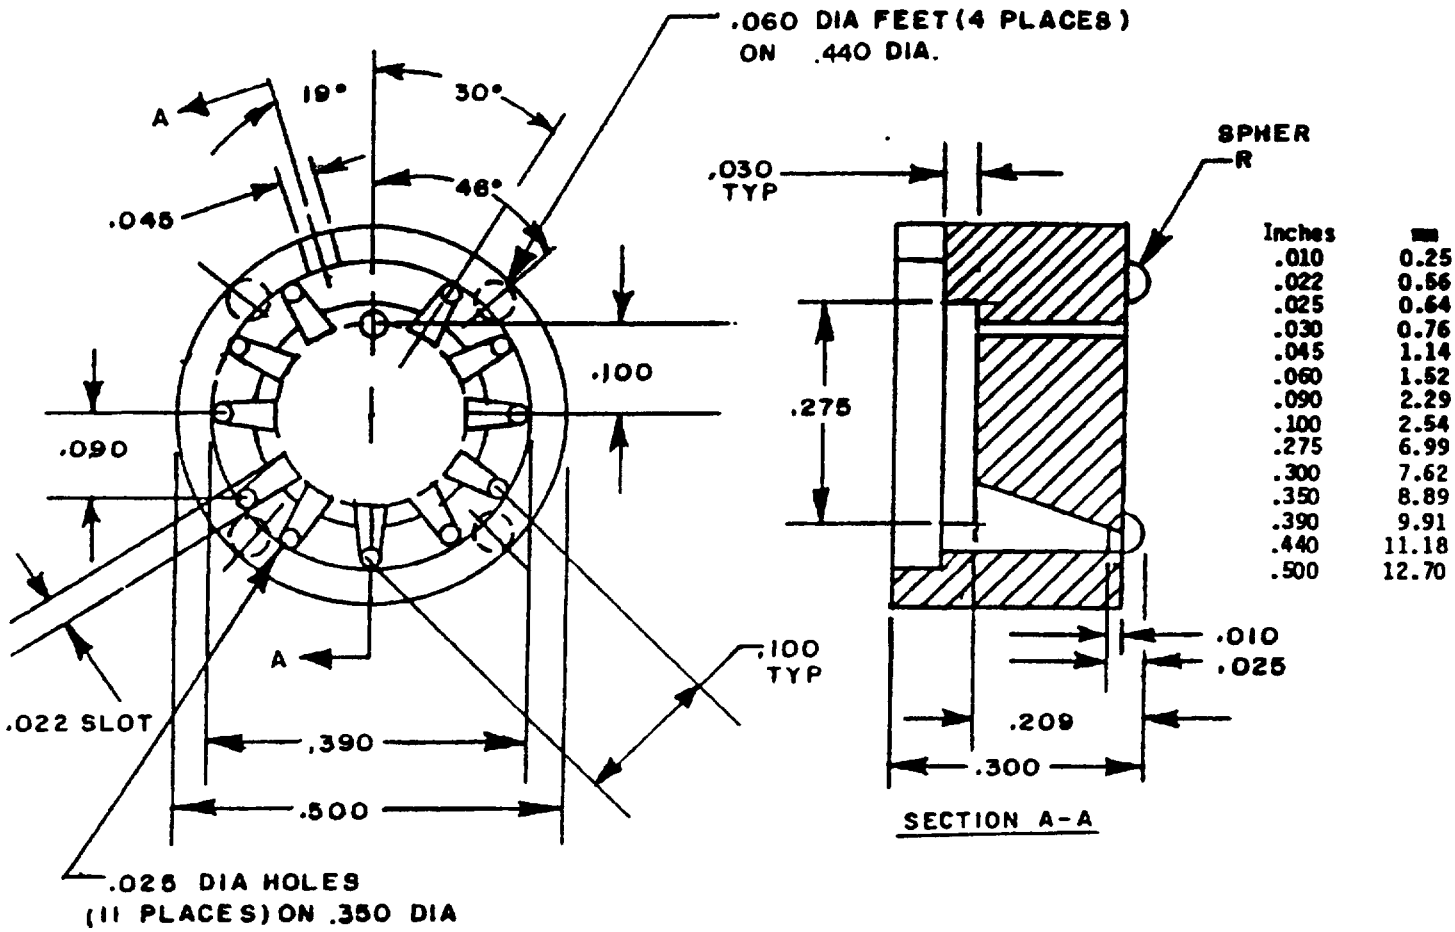

A-55485/04-016


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

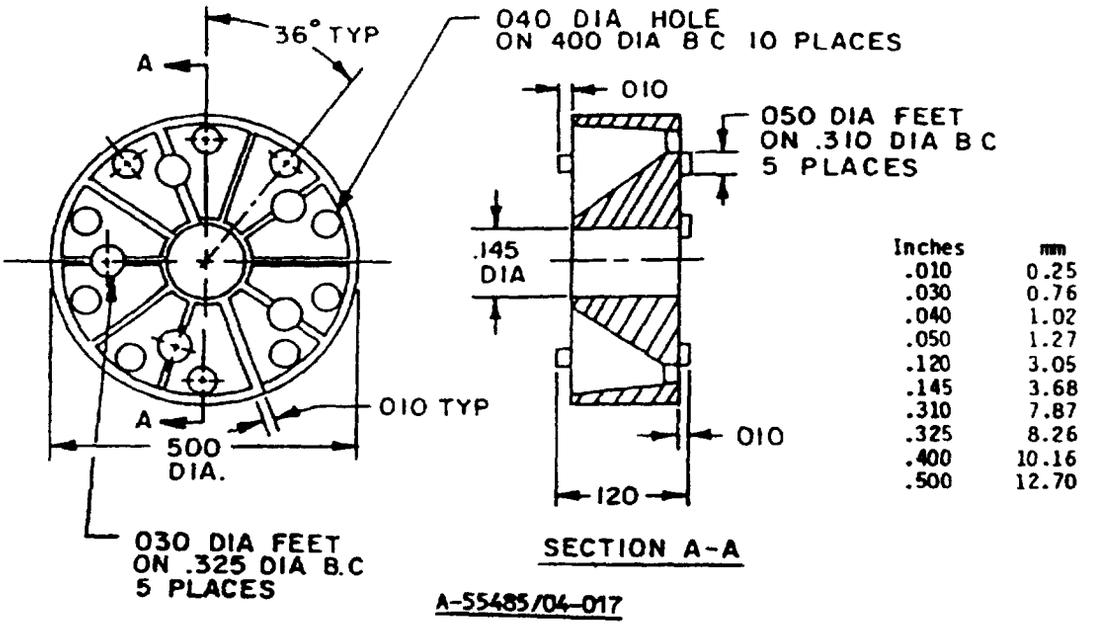

Inches	mm
.010	0.25
.030	0.76
.040	1.02
.050	1.27
.120	3.05
.145	3.68
.310	7.87
.325	8.26
.400	10.16
.500	12.70

A-55485/04-017

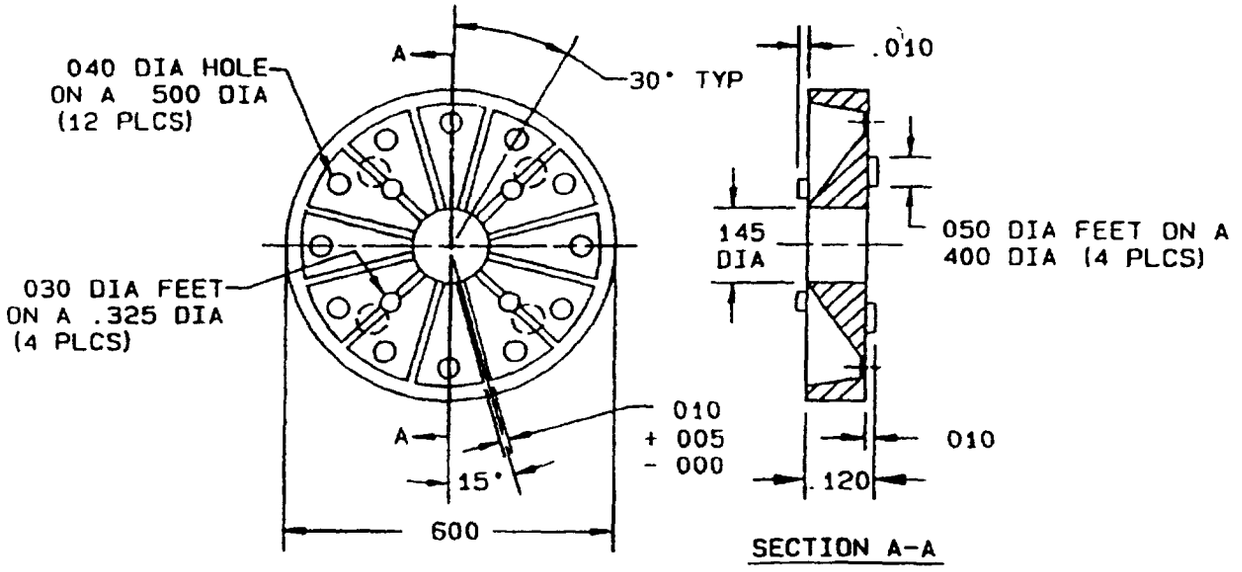


Inches	mm	Inches	mm
.005	0.13	.145	3.68
010	0.20	.325	8.26
030	0.76	.400	10 16
040	1 02	.500	12.70
.050	1.27	600	15 24
.120	3.05		

A-55485/04-018

Figure 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

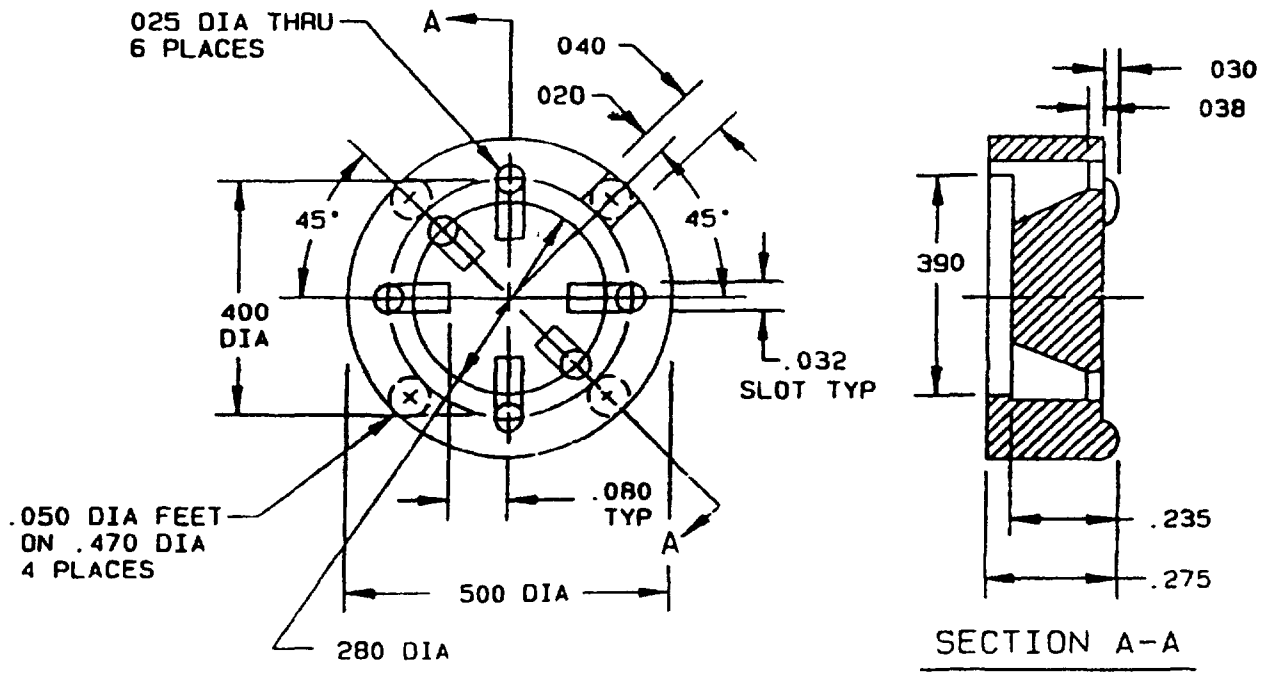

Inches	mm		Inches	mm
020	0 51	||	235	5 97
025	0 64	||	275	6 99
030	0 76	||	280	7 11
032	0 81	||	300	7 62
038	0 97	||	.390	9 91
040	1 02	||	470	11 94
.050	1.27	||	.500	12.70
080	2 03	||		

A-55485/04-019

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on height of pad shall be ±.015 (0.38 mm).
4. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for decimals and ±1° on angles. A .010 (0.25 mm) radius is permissible on corners and edges. A 1° draft is permitted on sides.

Figure 1 Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I Suggested sources of supply 1/

CID PIN (see figure 1) A-55485/04-	Vendor commercial PIN 2/							
	CAGE code 07047	CAGE code 08289	CAGE code 13103	CAGE code 21071	CAGE code 24227	CAGE code 32559	CAGE code 53174	CAGE code 54355
001N	10369N				4018A			
001D	10369D							
002N	10480N			10146-1			AP-021/N	965-716N
002D	10480D			10146-2			AP-021/D	965-716D
003N	10277N			10718-1			AP-029/N	965-718N
003D	10277D			10718-2			AP-029/D	965-718D
004N	10006N			10392-1			AP-050/N	965-550N
004D	10006D			10392-2			AP-050/D	965-550D
005N	10050N			10112-1			AP-062/N	965-536N
005D	10050D			10112-2			AP-062/D	965-536D
006N							AP-261/N	
006D	10229D						AP-261/D	
007N		812-020-N	7717-21N	10150-1			AP-046/N	965-717N
007D		812-020-D	7717-21D	10150-2			AP-046/D	965-717D
008N				10148-1			AP-025/N	965-522N
008D				10148-2			AP-025/D	965-522D
009N								
009D								
010N	10405N			10519-1			AP-408/N	965-648N
010D	10405D			10519-2			AP-408/D	965-648D
011N	10344N			10872-1	4021		AP-401/N	965-649N
011D	10344D			10872-2			AP-401/D	965-649D
012N				10758-1			AP-428/N	965-650N
012D	10354D			10758-2			AP-428/D	965-650D
013N					4006	701-130	AP-091/N	965-651N
013D								
014N				10348-1			AP-261/N	965-652N
014D	10229D			10348-2			AP-261/D	965-652D
015N			7717-104N	10522-1			AP-433/N	965-658N
015D				10522-2			AP-433/D	965-658D
016N								
016D	10317D							
017N	10322N			10879-1			AP-317/N	965-512N
017D				10879-2			AP-317/D	965-512D
018N	10323N			10819-1				965-875N
018D				10819-2				965-875D
019N							AP-209/N	
019D	10040D						AP-209/D	

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply - Continued. 1/

1/ This table is not a qualified products list or an approved source list. The vendors listed have submitted Certificates of Compliance (see A-A-55485) to DESC-EMM; however, parts may be ordered from any manufacturer who agrees to supply products that meet all the requirements of this CID.

2/ Vendor commercial PIN's are given for reference only. Do not use these numbers for ordering purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply - Continued. 1/

Vendor CAGE number	Vendor name and address
07047	Milton Ross Company 262 Valley Road Warrington, PA 18976-2533 (215) 491-0600
08289	Delbert Blinn Company, Incorporated 1678 East Mission Boulevard Pomona, CA 91766-2007 (909) 623-1257
13103	Thermalloy, Incorporated 2021 West Valley View Lane Dallas, TX 75381-0839 (214) 243-4321
21071	Globe Plastics, Incorporated 13477 Twelfth Street Chino, CA 91710-9998 (909) 464-1520
24227	Teknational Industries, Incorporated 480 Clinton Avenue South Rochester, NY 14620-1103 (716) 232-1291
32559	Bivar, Incorporated 4 Thomas Irvine, CA 92718-2512 (714) 951-8808
53174	APX Plastics Company 3407 Dalworth Street Arlington, TX 76011-6815 (817) 275-3883
54355	Accessories for Electronics, Incorporated 800 Merrick Road Baldwin, NY 11510-3593 (516) 546-1751

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information 1/

Superseded (old) PIN in accordance with MIL-M-38527/48: M38527/04-	Superseding (new) CID PIN A-55485/04-
001	001
002	002
003	003
004	004
005	005
006	006
007	007
008	008
009	009
010	010
011	011
012	012
013	013
014	014
015	015
016	016
017	017
018	018
019	019

1/ Complete PIN shall include a suffix letter to denote material.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY

DLA-ES

(Project 5999-0313-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.