[INCH−POUND]
A−A−59590/1E
21 September 2025
SUPERSEDING
A−A−59590/1D
1 June 2020

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDERS, ELECTRICAL CARD, WEDGE RETAINERS, 3 PIECE, SCREW ACTUATED DRIVE, .225 X .260 INCH BODY SIZE, WEDGE BODY MOUNTING, WITH LEVER ACTION LOCKING

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A−A−59590.

SCOPE. This CID specification sheet covers 3 piece card holders that use a lever, with a locking feature, to actuate wedges to hold circuit card assemblies into their installed positions in heat sinking devices (cold plates, heat exchanger) or other applications. Card holders covered by this CID specification sheet are intended to provide 60g/6ms resistance to shock, withstand 25 G-rms of vibration and provide 2 to 4 degrees C/Watts/inch thermal resistance between the circuit card assemblies and the heat sink surfaces. Items covered by this CID specification sheet are intended for commercial/industrial applications.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

AA59590	/01	B, C, E, H, R	F, G, J, V	* *	U
CID number	Applicable CID sheet	Finish	Mounting	Length	Facing

Example: AA59590/01HV28U is the PIN for a black, hard anodized finished, 2.8 inch (71.1 mm) long card holder with an actuating lever that locks the card holder into its installed position. The card holder also features two tapped mounting holes for use with 2−56 UNC 2B fasteners.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card firmly in place providing high resistance to shock and vibration while providing maximum thermal transfer. The direct clamping force of configuration A card holders is approximately 120 pounds (534 Newtons) when adjusted in accordance with the recommended procedure.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A−A−59590.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein and the general CID.

Cold plate slot width. The recommend cold plate slot width to accommodate the circuit card assembly with attached card holder is .300 inch (7.62 mm) plus the thickness of the printed board of the circuit card assembly (see A−A−59590).

Configuration. The configuration of a card holder shall be as specified in table I. The details of a particular configuration consist of those on figures 1 and 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Finish options. The finish designator shall be as specified in A−A−59590. The finishes of the wedges available for this CID specification sheet are as follows: "B" (black anodize), "C" (gold chemical film), "E" (electroless nickel), "H" (hard black anodize), or "R" (clear chemical film).

Mounting options. The mounting designators shall be as specified in A−A−59590. The mounting options available for this CID specification sheet are as follows: "F" (tapped metric M2 x 0.4 holes), "G" (tapped metric M2.5 x 0.45 holes), "J" (rivet mount holes with counterbore and countersink), "T" (tapped 0−80 UNF holes), or "V" (tapped 2−56 UNC holes). See figure 1 for mounting hole spacing requirements.

Rivet mount holes. The holes used for rivet mounting shall be .066/.073 inch (1.68/1.85 mm) diameter, countersunk 100 degrees by .140 inch (3.56 mm) diameter through holes with a counterbore of .156 inch (3.96 mm) diameter by .200 inch (5.08 mm) deep.

Rivets. This card holder uses rivet style A as specified in A−A−59590 when rivet mounting is used.

Length, expanded, and relaxed dimensions. The length, expanded, and relaxed dimensions shall be as specified on figure 1. The length designator shall be as specified in A−A−59590 and the available lengths for this CID specification sheet are listed in table I.


Facing. This card holder is available for mounting as a universal position that can be used as either a left hand or right hand position. The universal card holder is depicted by configuration A on figures 1 and 3. Left and right facing card holders are depicted by configuration B on figure 2 and are no longer available. Universal card holders shall include a suffix "U" in the PIN.

Lever. A lever-action device shall be used to expand the card holder to secure the attached circuit card assembly in its installed position. When in the relaxed state, the card holders shall allow the circuit card assembly to be placed into or removed from its installed position with zero insertion force to a slight extraction drag. To secure the circuit card assembly in place, the lever shall be actuated, to become perpendicular with the card holder, and parallel with and towards the circuit card.

TABLE I. Additional assembly dimensions (see figure 1).

PIN length designator	Configuration	Dimension "Length" ±.02 (±0.5 mm)	Dimension "B" ±.03 (±0.8 mm)	Dimension "M" ±.005 (±0.13 mm)
28	A	2.80 (71.1)	3.70 (93.9)	.90 (22.9)
30	B	3.00 (76.2)		.46 (11.7)
38	A	3.80 (96.5)	4.70 (119.4)	1.90 (48.3)
40	B	4.00 (101.6)		1.46 (37.1)
48	A	4.80 (121.9)	5.70 (144.8)	2.90 (73.7)
50	B	5.00 (127.0)		2.46 (62.5)
58	A	5.80 (147.3)	6.70 (170.2)	3.90 (99.1)
60	B	6.00 (152.5)		3.46 (87.9)
68	A	6.80 (172.7)	7.70 (195.6)	4.90 (124.5)
70	B	7.00 (177.8)		4.46 (113.3)
78	A	7.80 (198.1)	8.70 (220.9)	5.90 (149.9)
80	B	8.00 (203.2)		5.46 (138.7)
88	A	8.80 (223.5)	9.70 (246.4)	6.90 (175.3)
90	B	9.00 (228.6)		6.46 (164.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

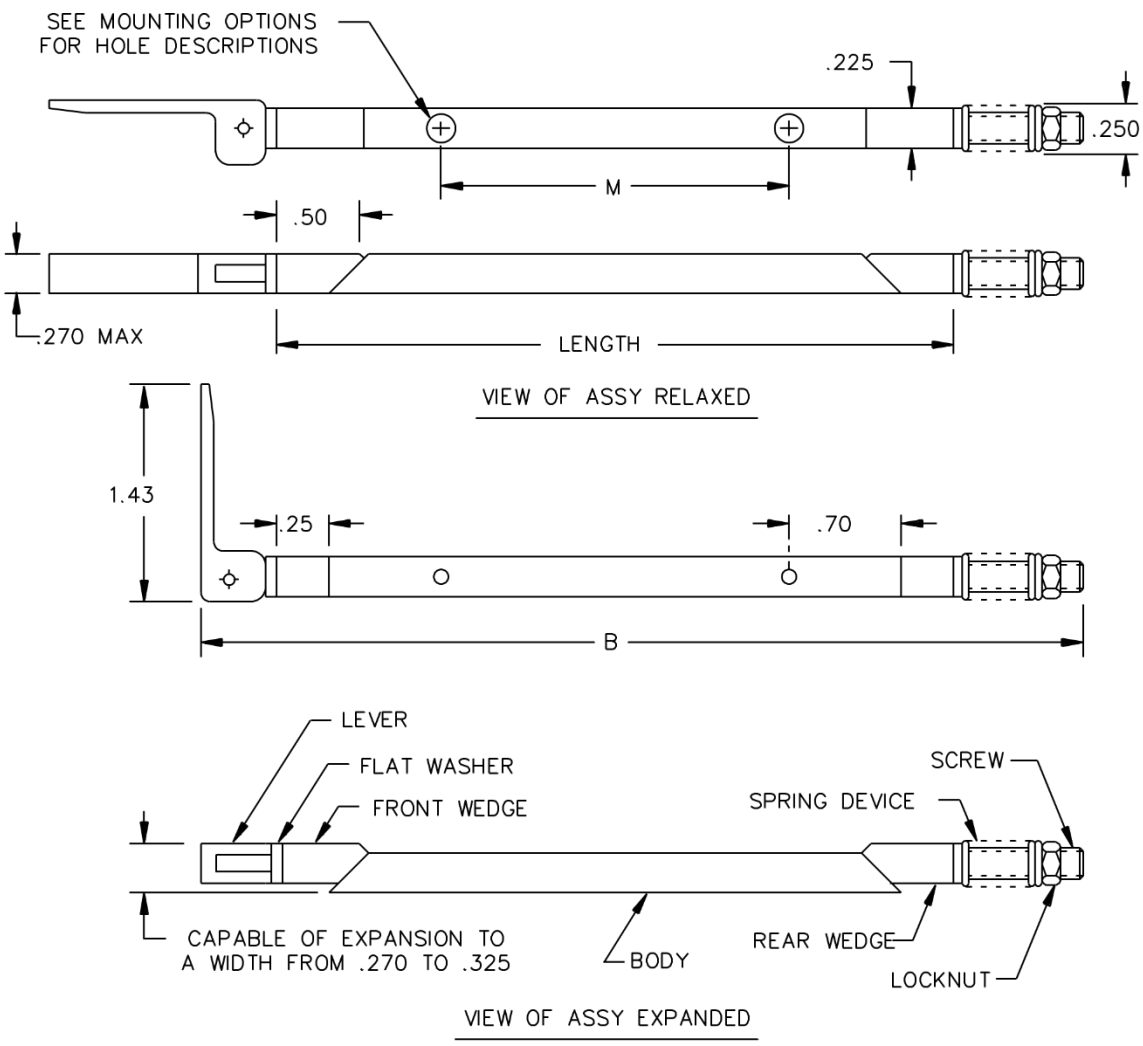


Configuration A

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.225	5.72	.25	6.4	.325	8.26	.70	17.8
.250	6.35	.270	6.86	.50	12.7	1.43	36.3

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Lever design may vary between suppliers.

FIGURE 1. Relaxed and expanded dimensions of configuration A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

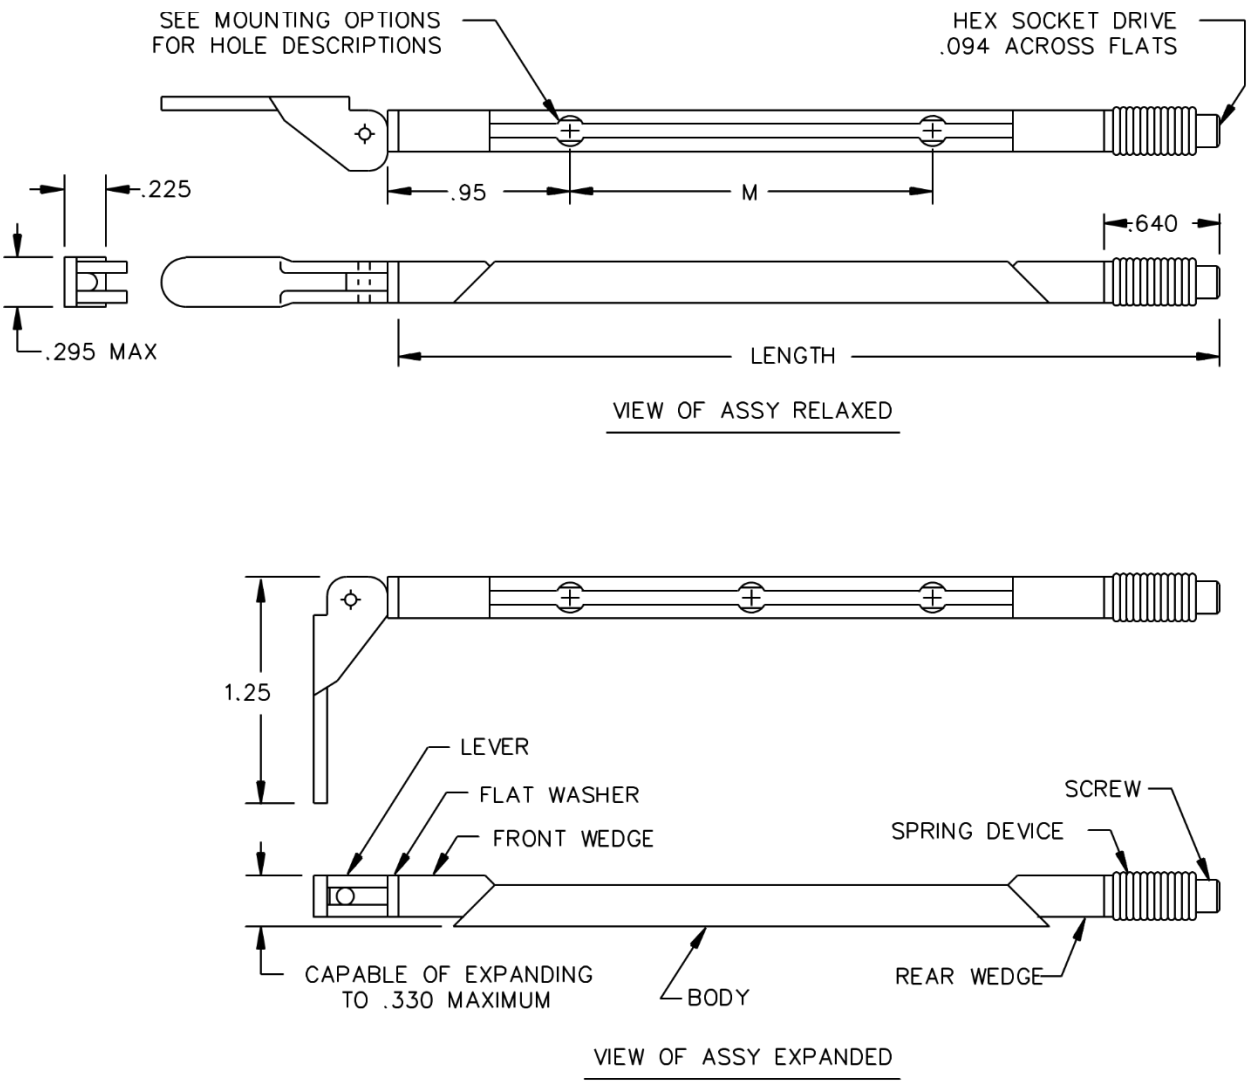


Configuration B (Right hand facing shown)

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.094	2.39	.295	7.49	.640	16.26	1.25	31.8
.225	5.72	.330	8.38	.95	24.1		

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Lever design may vary between configurations.

FIGURE 2. Relaxed and expanded dimensions of configuration B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

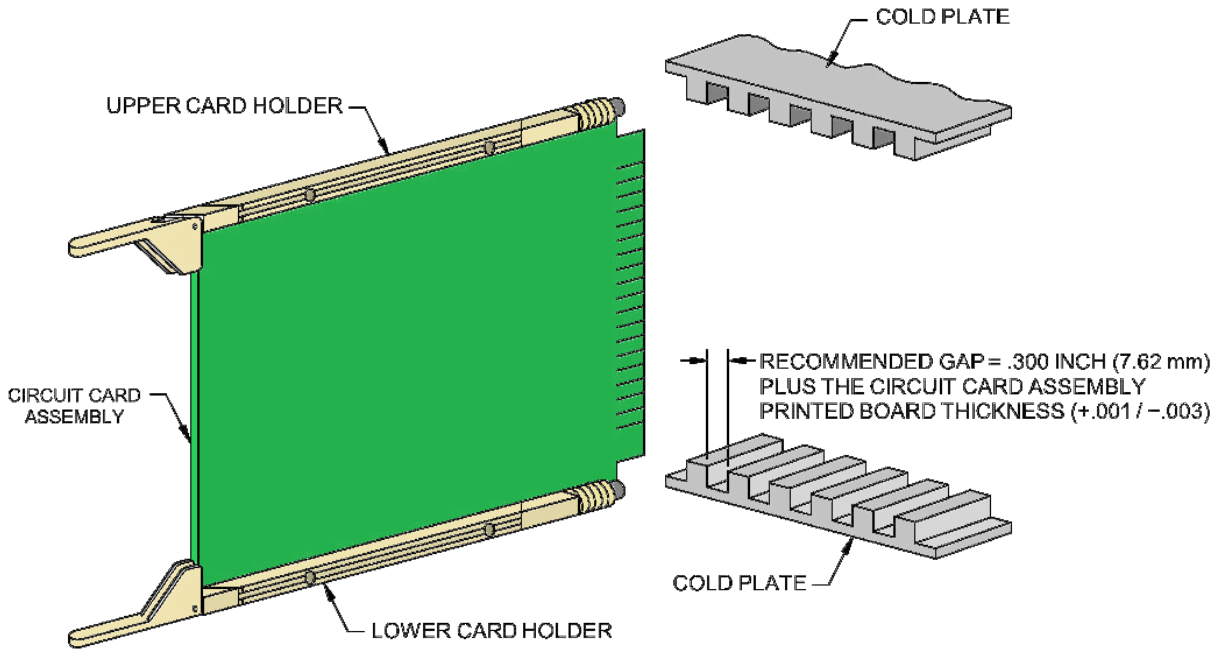

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.003	0.08	.300	7.62

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Universal facing card holders (configuration A shown) can be used in either left hand (lower card holder) or right hand (upper card holder) applications.

FIGURE 3. Facing options for configuration A.

Application data for card holders. Configuration A card holders can be used in either left or right facing applications. Configuration A card holders are supplied assembled but are not adjusted from the manufacturer. Configuration B card holders are supplied assembled and pre-adjusted from the manufacturer.

Clamping force adjustment procedure for configuration A (universal) card holder. The universal card holder is supplied assembled but not adjusted for use. In order to apply the proper clamping force the card holder needs to be adjusted in accordance with the following procedure:

(1) Fasten card holder to circuit card assembly.

(2) Insert circuit card assembly with card holders attached into cold plate.

(3) Actuate lever to locked/closed position.

(4) Tighten locknut on end of screw until wedges initially contact wall of cold plate slot, or slight insertion/extraction drag is felt.

(5) Additionally tighten locknut two full turns.

(6) Card holder is now adjusted and ready for use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Clamping force data for configuration A (universal) card holders. Direct force of card holder is approximately 120 pound force (533.8 N) when adjusted in accordance with the recommended procedure herein. Direct force of card holder is affected as follows:

(a) 1.8 pound force (8 N) for each .0010 inch (0.025 mm) variation of cold plate slot width, or

(b) 45 pound force (200.2 N) for each full turn of locknut.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A−A−59590 − Holder, Electrical Card, Wedge Retainers, 3 Piece, For Cold Plate Applications, General Requirements For.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

Ordering data. Ordering data is as specified in A−A−59590.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
61081	Schroff, Inc. 7328 Trade Street San Diego, CA 92121−3410	Telephone: (858) 740−2400 Facsimile: (858) 740−2430 E-mail: askschroff@nVent.com URL: https://schroff.nvent.com
5BG68	American Circuit Card Retainers, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806−1231	Telephone: (714) 738−6194 Facsimile: (714) 446−0119 E-mail: sales@accrmfg.com URL: https://www.accrmfg.com

Part number supersession data. These CID specification sheet PINs supersedes the following manufacturer's part numbers as shown in table II. The CID PINs listed in table II are only for length designator "28" (configuration A). See table III for CID PIN construction using other available lengths for this CID specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE II. Commercial P/N supersession data. 1/

PIN designator AA59590/01 2/	Vendor similar designator or type part number 3/ CAGE 61081	Vendor similar designator or type part number 3/ CAGE 5BG68	Vendor similar designator or type part number
CF28U		3225LCG-2.80TM2	
CG28U		3225LCG-2.80TM2.5	
CJ28U		3225LCG-2.80H	
CT28U		3225LCG-2.80T0	
CV28U		3225LCG-2.80T2	
RF28U		3225LCC-2.80TM2	
RG28U		3225LCC-2.80TM2.5	
RJ28U		3225LCC-2.80H	
RT28U		3225LCC-2.80T0	
RV28U		3225LCC-2.80T2	
BF28U	L2252.80TM2	3225LBA-2.80TM2	
BG28U	L2252.80TM2.5	3225LBA-2.80TM2.5	
BJ28U		3225LBA-2.80H	
BT28U	L2252.80T0	3225LBA-2.80T0	
BV28U	L2252.80	3225LBA-2.80T2	
HF28U		3225LHB-2.80TM2	
HG28U		3225LHB-2.80TM2.5	
HJ28U		3225LHB-2.80H	
HT28U		3225LHB-2.80T0	
HV28U		3225LHB-2.80T2	
EF28U		3225LEN-2.80TM2	
EG28U		3225LEN-2.80TM2.5	
EJ28U		3225LEN-2.80H	
ET28U		3225LEN-2.80T0	
EV28U		3225LEN-2.80T2	

1/ CID PINs listed only with length designator "28" for configuration A. See table III for CID PIN construction using other available lengths.
2/ Card holder using mounting option "J" must be disassembled during the mounting onto the circuit card assembly and require readjustment upon reassembly.
3/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph of the basic CID.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

PIN length examples. The CID PINs listed in table III are for all available standard card holder lengths for this specification sheet. However, only one specific finish, mounting and configuration are listed (see PIN example for a break-down of the codes).

TABLE III. Example of PIN with available length designators. 1/

PIN designator AA59590/01	Vendor similar designator or type part number 1/ 2/ CAGE 61081	Vendor similar designator or type part number 1/ 2/ CAGE 5BG68	Vendor similar designator or type part number
BV28U	L2252.80	3225LBA−2.80T2	
BV38U	L2253.80	3225LBA−3.80T2	
BV48U	L225.80	3225LBA−4.80T2	
BV58U	L2255.80	3225LBA−5.80T2	
BV68U	L2256.80	3225LBA−6.80T2	
BV78U	L2257.80	3225LBA−7.80T2	
BV88U	L2258.80	3225LBA−8.80T2	

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph of the basic CID.
2/ Card holder is available using universal facing (see configuration A on figure 1).

Left and right facing card holders are depicted by configuration B on figure 2 and are no longer available.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Army − CR
Navy − EC
Air Force − 85
DLA − CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA − FAS

Preparing Activity:

DLA − CC

Project 5998−2025−017

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.