[INCH−POUND]
A−A−59832/6C
16 July 2024
SUPERSEDING
A−A−59832/6B
6 May 2020


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

EXTRACTOR, ELECTRICAL CARD, METAL, NON−LOCKING, SINGLE−SIDED ACTUATION, NARROW PROFILE, STRAIGHT ACTUATING HANDLE FOR .032, .063, .094, .125, AND .156 INCH THICK CIRCUIT CARD ASSEMBLIES

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring extractors described herein shall consist of this document and the latest issue in effect of A−A−59832.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES herein).

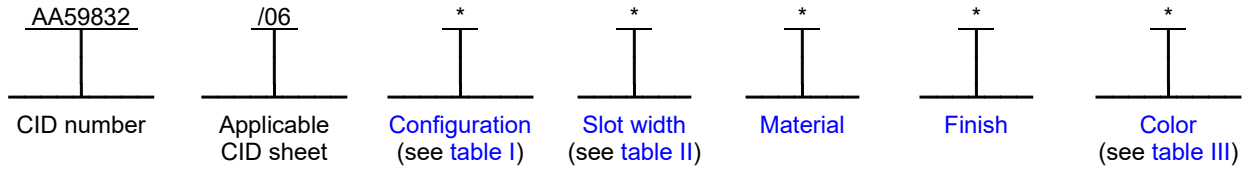

Example: AA59832/06S21AB is the PIN for a right side straight handle aluminum extractor designed for mounting on a circuit card assembly with a printed board thickness of .063 inch (1.60 mm) in width. The corrosion protection finish applied to the extractor is black hard anodize and the handle has a sensitive electronic device (SED) symbol.

SALIENT CHARACTERISTICS.

Performance. Extractors shall be capable of initiating the removal of a circuit card assembly from its installed position. The mechanical advantage of all extractor configurations on this CID specification sheet shall be a minimum of 4:1.

Interface and physical dimensions. The extractors supplied to this CID specification sheet shall be as specified herein and meet the general requirements specified in CID A−A−59832.

Configuration. The configuration of an extractor shall be as specified in table I and on figures 1 through 6.

TABLE I. Configurations.

Configuration	Applicable figures	Extractor description
K	1 and 2	Left hand with SED symbol on the straight handle
L	1	Left hand with straight handle
M	3	Left hand with bent leg and straight handle
N	3 and 4	Left hand with bent leg and SED symbol on the straight handle
P	4 and 5	Right hand with bent leg and SED symbol on the straight handle
Q	5	Right hand with bent leg and straight handle
R	6	Right hand with straight handle
S	6 and 2	Right hand with SED symbol on the straight handle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Slot width. The available slot widths needed to accommodate various printed board thicknesses for the extractors covered by this CID specification sheet are specified in table II. The slot width designator shall be included in the PIN.

TABLE II. Slot width configurations and dimensions. 1/

Slot width designator	Slot width dimension "A" 2/ Inch (mm)	Accommodates printed board thickness Inch (mm)	Roll pin width Inch (mm)	Handle width dimension "B" Inch (mm)
1	.040 (1.02)	.032 (0.8)	.187 (4.75)	.25 (6.4)
2	.075 (2.03)	.063 (1.6)	.187 (4.75)	
3	.105 (2.79)	.094 (2.4)	.250 (6.35)	
4	.142 (3.56)	.125 (3.2)	.250 (6.35)	.29 (7.4)
5	.165 (4.19)	.156 (4.0)	.312 (7.94)	

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for general information only.
2/ Tolerance is +.005, −.005 inch (+0.127, −0.127 mm).

Material. The material used in the extractor body shall be as specified in A−A−59832. The applicable material type designators for this CID specification sheet are "1" (aluminum alloy 6061, temper T6), "2" (aluminum alloy 5052, temper H32), or "7" (Stainless steel, type 301, 302 or 304). The material designator shall be included in the PIN.

Material thickness. The aluminum thickness shall be .063 ±.003 inch (1.60 ±.077 mm). The stainless steel thickness shall be .060 ±.003 inch (1.52 ±0.077 mm).

Roll pin. A stainless steel roll pin is furnished with each extractor. The roll pin is .09375 inch (2.38 mm) diameter by the widths specified in table II.


Finish. The finish designator shall be as specified in A−A−59832. The finishes available for this CID specification sheet are as follows: "A" (anodize), "D" (thick chemical film for maximum corrosion protection), "M" or "L" (thinner chemical film for improved electrical conductivity with corrosion protection, hereafter referred to as "low resistance chemical film") for extractors fabricated of aluminum alloys and "P" (passivation treatment) extractors fabricated of stainless steel.

Color. The color designator shall be as specified in A−A−59832. The colors available for this CID specification sheet shall be "C" (clear) or "G" (gold) for low resistance chemical film and "C" (clear) for passivation treatment. The color of anodized extractors shall be specified in table III. The color designator shall be included in the PIN.

TABLE III. Colors of anodized extractors.

Designator	Color	Designator	Color
B	Black	R	Red
C	Clear	U	Blue
D	Green	V	Violet (purple)
E	Gray	W	Brown
F	Orange	Y	Yellow

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

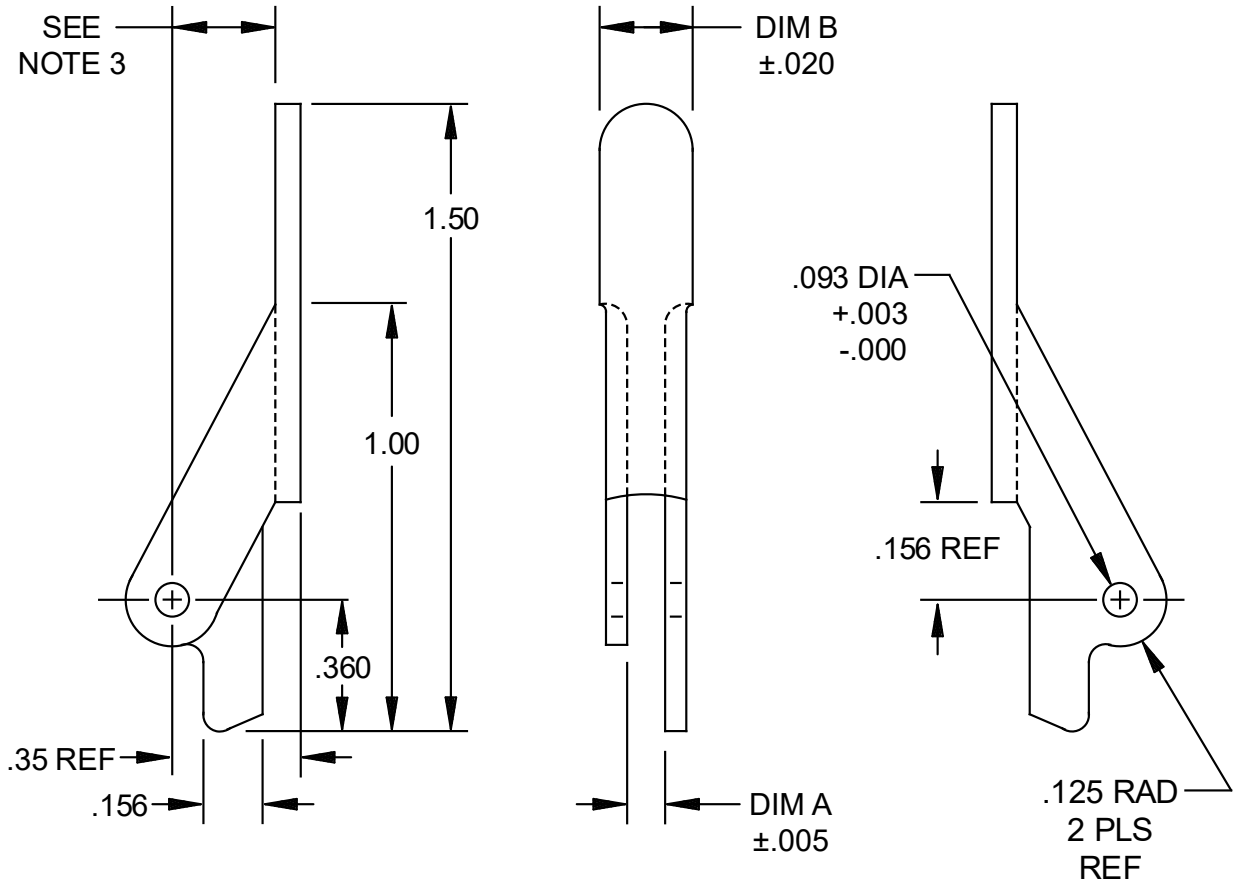


BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.125	3.18	.156	3.96	.360	9.14
.005	0.13	.093	2.36	.140	3.56	.18	4.57	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 1. Configuration L dimensions (left hand).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

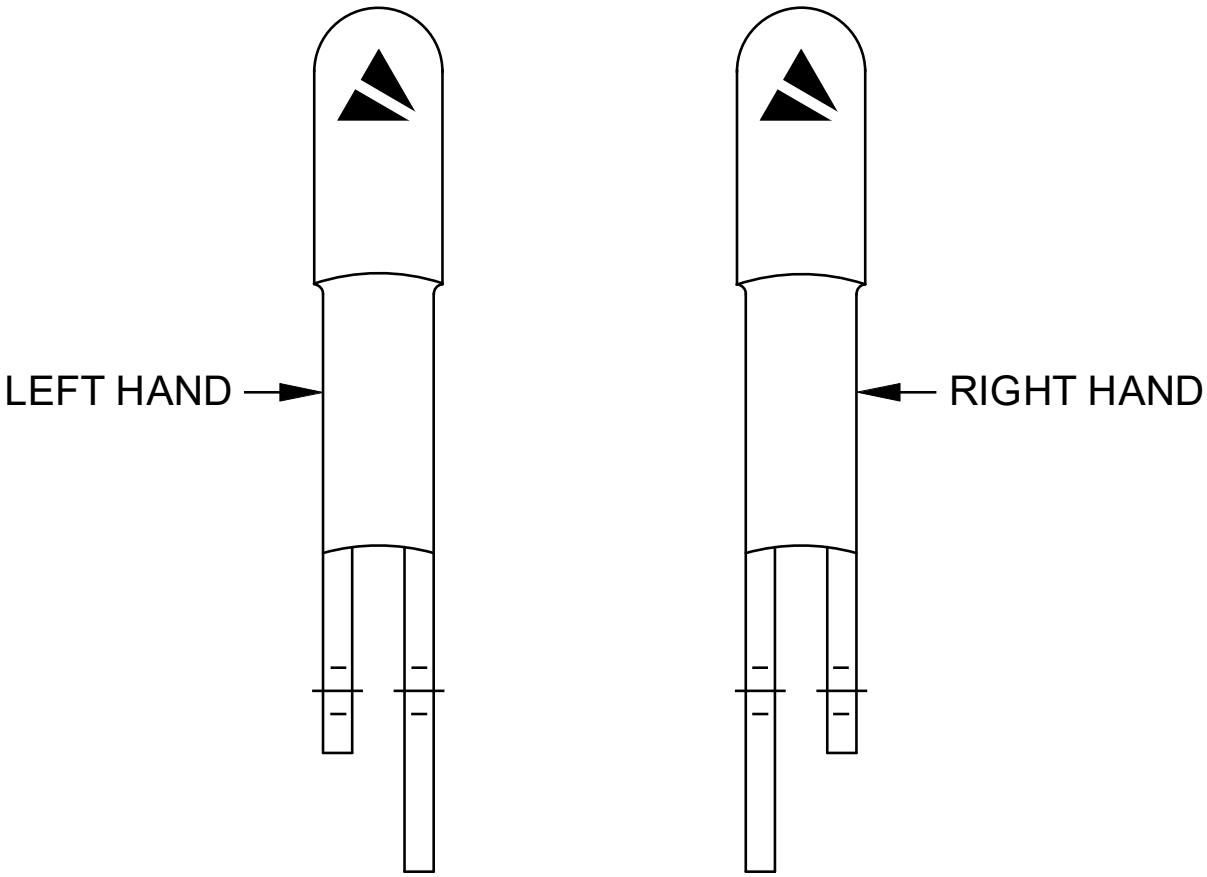

NOTES:
1. The SED symbol displayed on the extractor handles shall be in accordance with A−A−59832.
2. Unless otherwise specified, a monochromatic reproduction of the symbol displayed in A−A−59832 using any color that contrasts with the color of the extractor handle may be used.

FIGURE 2. Configurations K and S with SED symbol on extractor handle (board edge view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

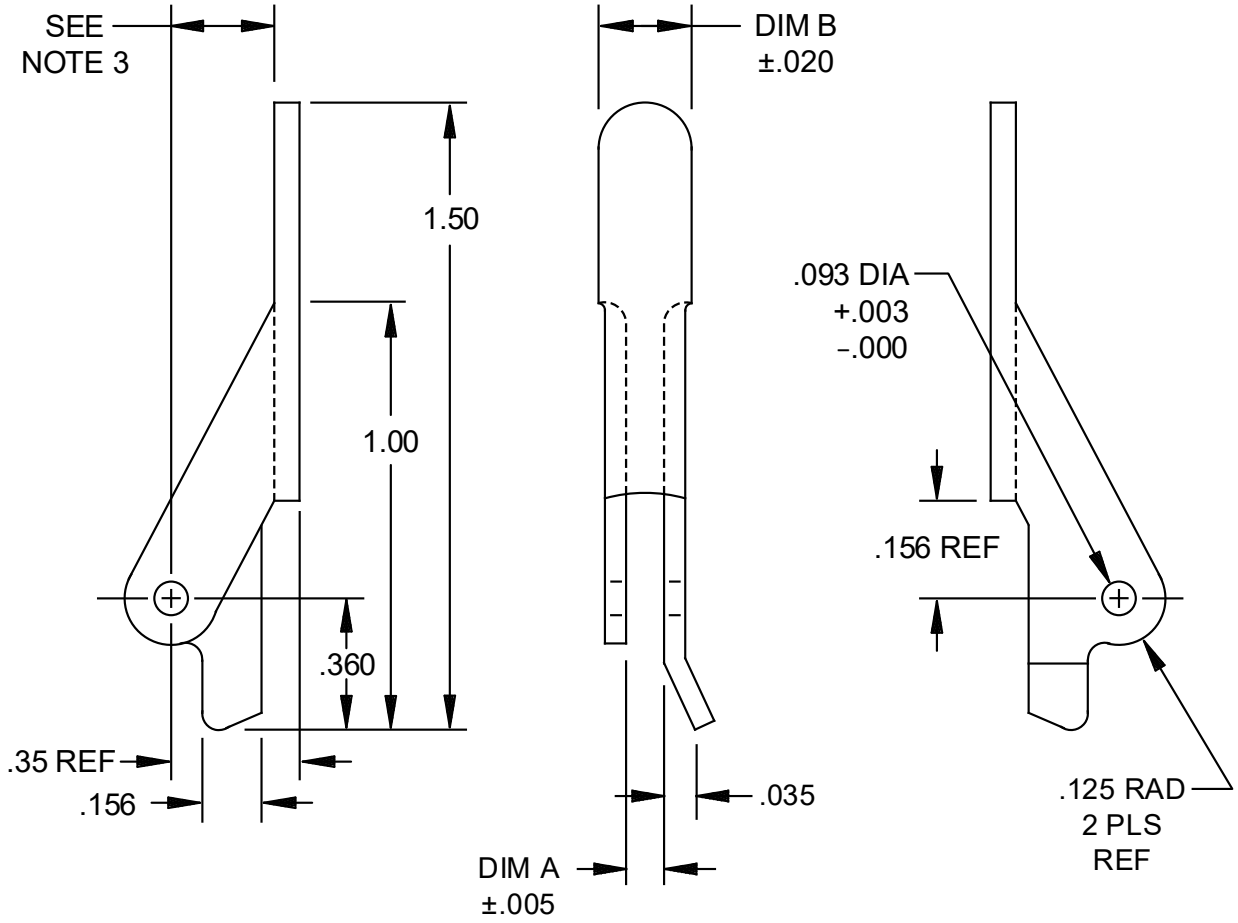


BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.140	3.56	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.156	3.96	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 3. Configuration M dimensions (left hand with bent leg).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

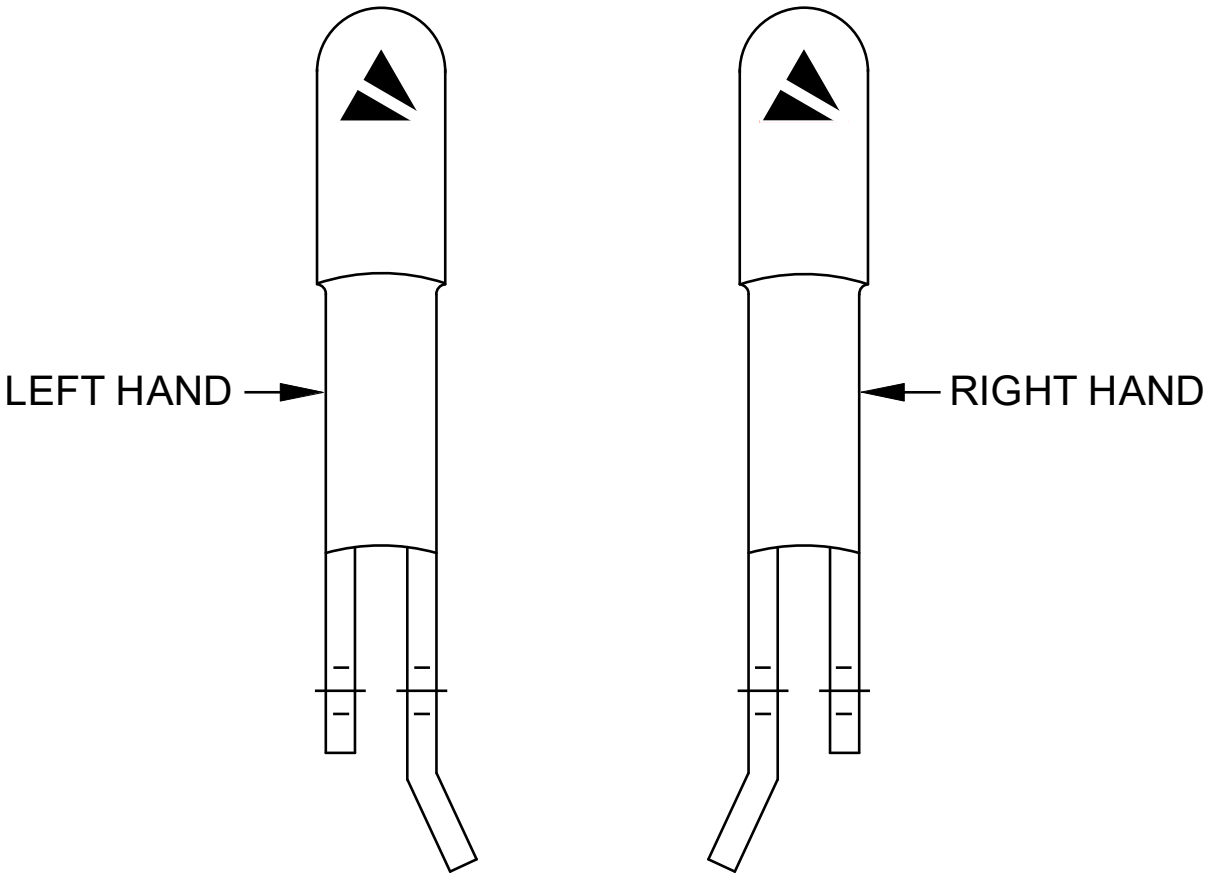

NOTES:
1. The SED symbol displayed on the extractor handles shall be in accordance with A-A-59832.
2. Unless otherwise specified, a monochromatic reproduction of the symbol displayed in A-A-59832 using any color that contrasts with the color of the extractor handle may be used.

FIGURE 4. Configurations N and P with bent leg and SED symbol on extractor handle (board edge view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

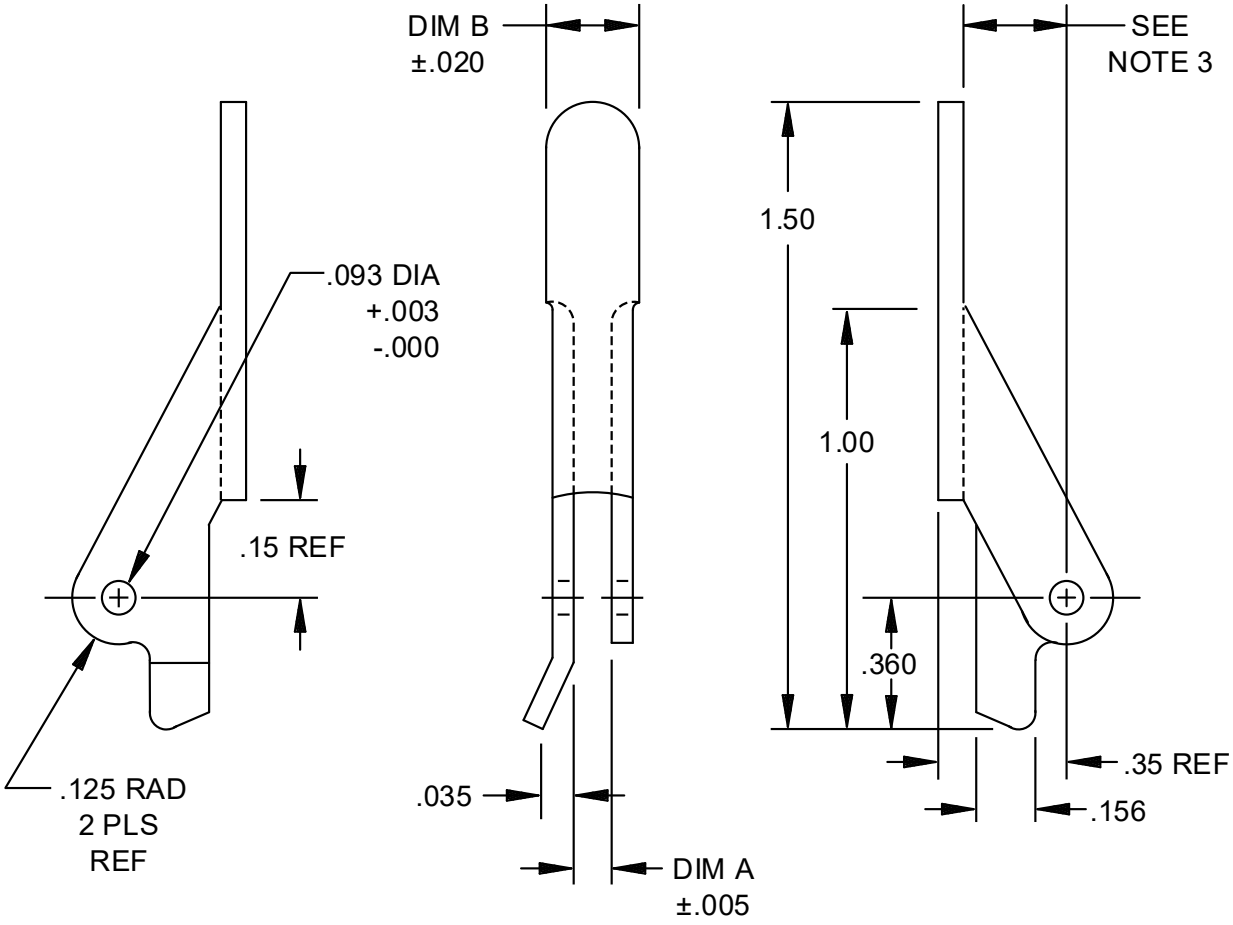


BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.140	3.56	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.156	3.96	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 5. Configuration Q dimensions (right hand with bent leg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

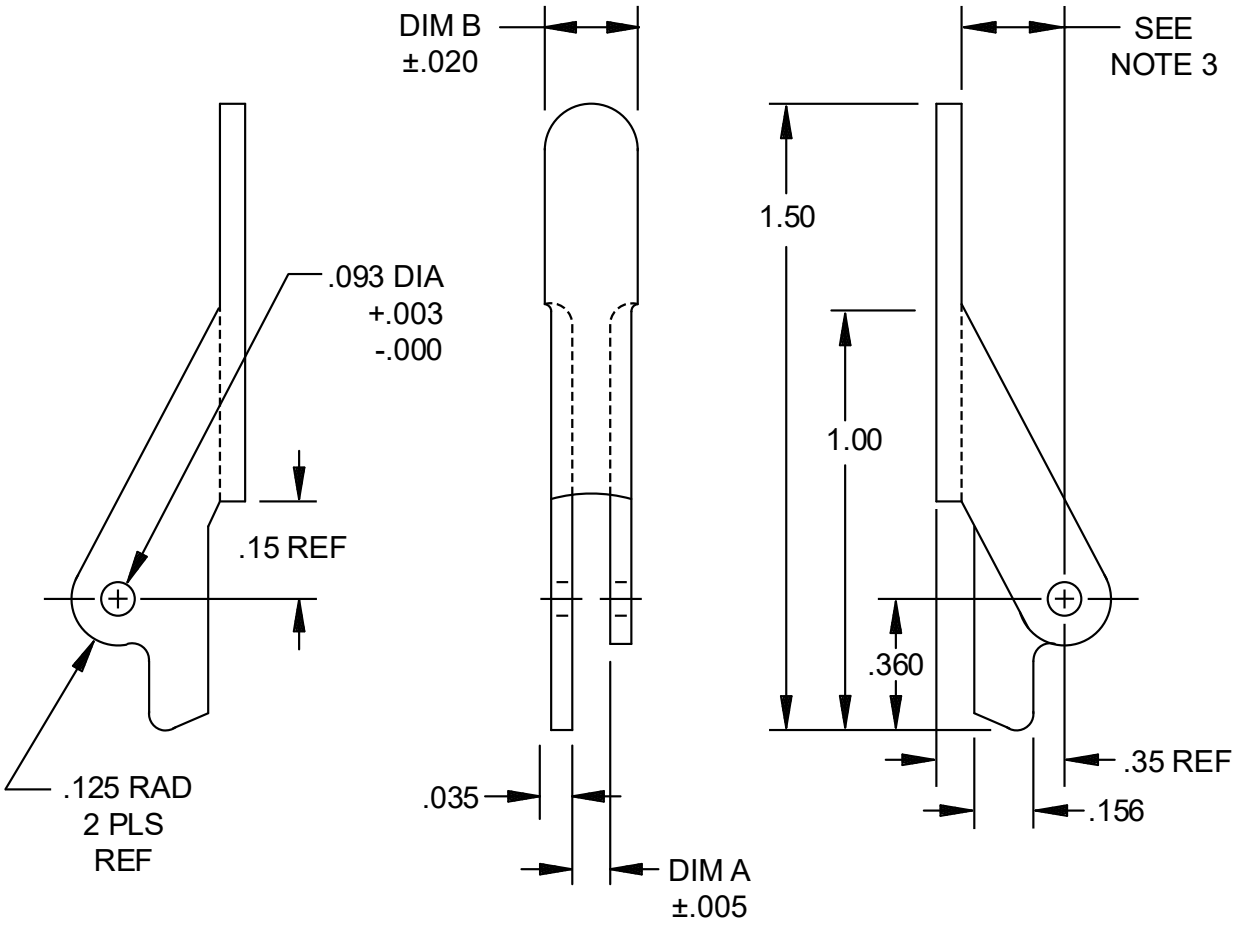

BOARD EDGE VIEW

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.020	0.51	.093	2.36	.140	3.56	.360	9.14
.005	0.13	.035	0.89	.125	3.18	.156	3.96	1.00	25.4
						.35	8.89	1.50	38.1

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Depth dimension is .29 inch (7.4 mm) for extractors from CAGE 5GB68 and CAGE 61081.

FIGURE 6. Configuration R dimensions (right hand).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

APPLICATION DATA.

Extractor orientation with circuit card assembly printed board. Figures 7 and 8 show the extractor mounted to a circuit card assembly and installed into a locking card guide from different views. Figure 7 depicts one strait on and two angled views of a right hand extractor fastened to the printed board of a circuit card assembly. Figure 8 depicts a right side view of a circuit card assembly with a right hand extractor fastened to the printed board.

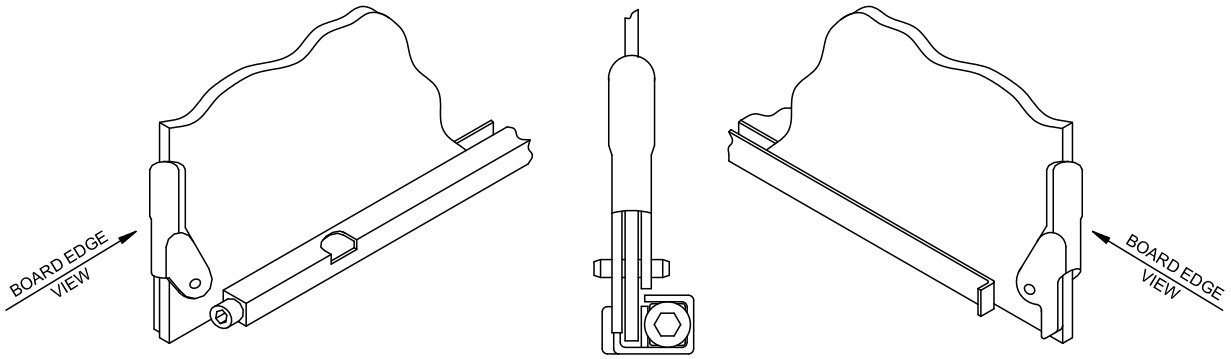


FIGURE 7. Extractor fastened to circuit card assembly (right hand extractor shown).


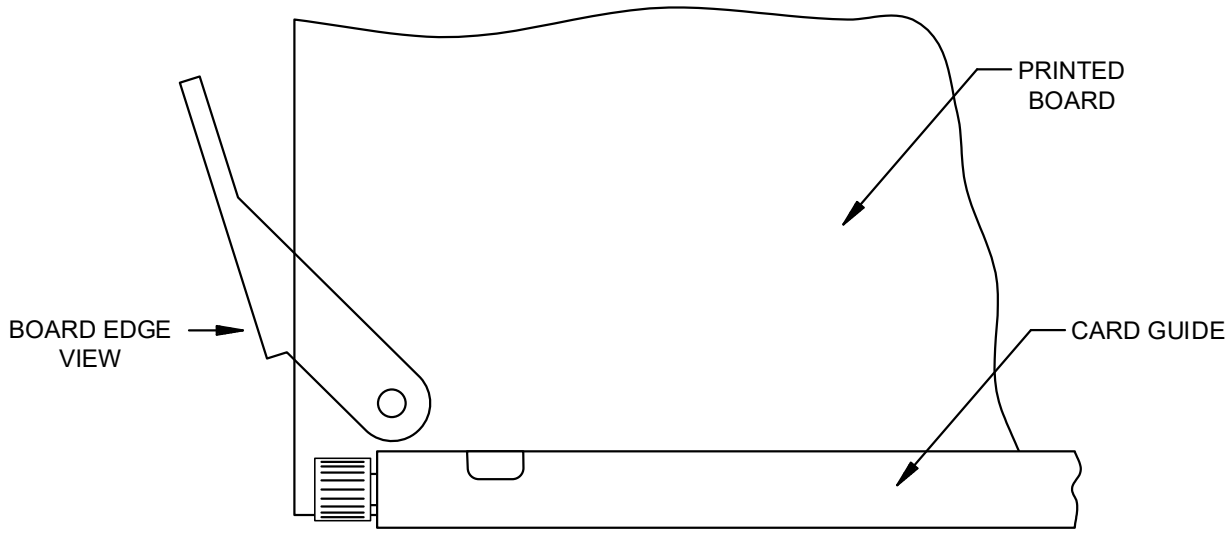


FIGURE 8. Circuit card assembly to card guide view (right hand extractor shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Circuit card positioning in relation to actuating surface. Two positions of a circuit card assembly edge to a locking card guide when seated in the connector are shown on figure 9. The circuit card assembly is ejected from its installed position by lever action of the extractor against the tab on a locking card guide (shown) or actuating surface of a card cage. The extractor will allow .030 inch (0.8 mm) over travel for tolerance take-up. Two extractors mounted on each circuit card assembly is recommended.

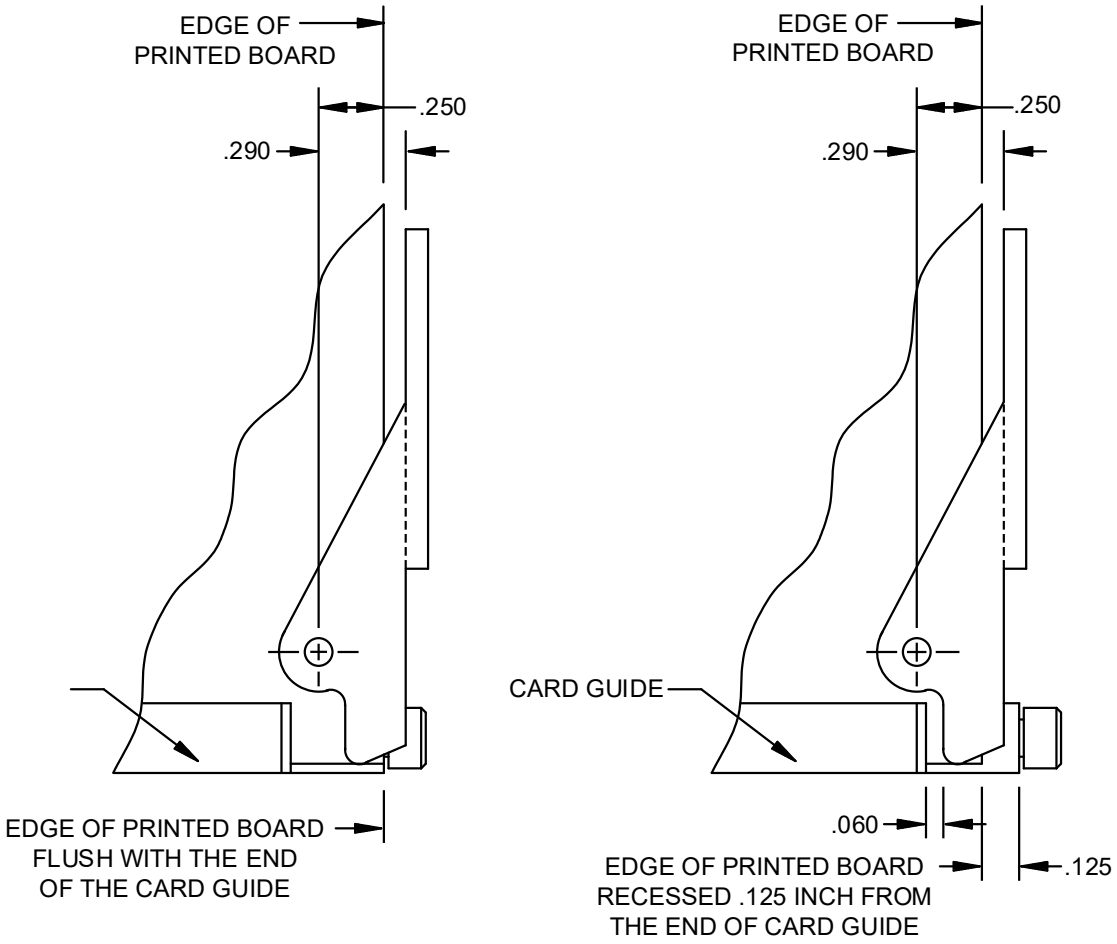


Inches	mm	Inches	mm	Inches	mm	Inches	mm
.060	1.52	.125	3.18	.250	6.35	.290	7.37

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 9. Circuit card assembly to card guide dimensions (right hand extractor shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Circuit card assembly printed board. The circuit card assembly should be designed so that electronic components on the printed board in the area around the extractor mounting hole have sufficient clearance for extractor rotation as shown on figure 10.

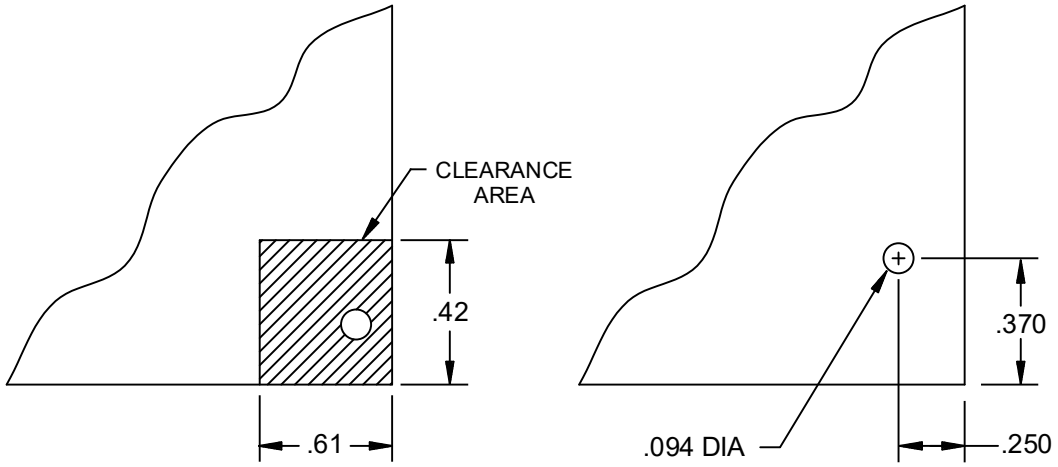

ELECTRONIC COMPONENT CLEARANCE ZONE REQUIRED TO ACCOMODATE MOUNTING AND ROTATION OF EXTRACTOR (LEG SIDE SHOWN)

PRINTED BOARD MOUNTING DIMENSIONS

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.094	2.39	.250	6.35	.370	9.40	.42	10.67	.61	15.49

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 10. Printed board clearance zone and mounting hole dimensions.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A-A-59832 - Extractor, Electrical Card, Metal, General Requirements For.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

Ordering data. Ordering data is as specified in A-A-59832.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
5BG68	American Circuit Card Retainers, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806-1231	Telephone: (714) 738-6194 Facsimile: (714) 446-0119 E-mail: sales@accrmfg.com URL: https://www.accrmfg.com
61081	Schroff, Inc. 7328 Trade Street San Diego, CA 92121-3410	Telephone: (800) 854-7086 Facsimile: (858) 740-2430 E-mail: askschroff@nVent.com URL: https://schroff.nvent.com

Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following manufacturer's P/Ns as shown in tables IV, V, and VI. This CID specification sheet PINs also supersedes those DESC Drawing 84191 PINs as shown in table VII. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
K11AR 3/	1119S-1LRAE	S71T6-1-L-1-E	
K21AR 3/	1119S-2LRAE	S71T6-2-L-1-E	
K31AR 3/	1119S-3LRAE	S71T6-3-L-1-E	
K41AR 3/	1119S-4LRAE	S71T6-4-L-1-E	
K51AR 3/	1119S-5LRAE	S71T6-5-L-1-E	
K11DG 4/	1119S-1LCGE	S71T6-1-L-E	
K21DG 4/	1119S-2LCGE	S71T6-2-L-E	
K31DG 4/	1119S-3LCGE	S71T6-3-L-E	
K41DG 4/	1119S-4LCGE	S71T6-4-L-E	
K51DG 4/	1119S-5LCGE	S71T6-5-L-E	
L11AR 3/	1119S-1LRA	S71T6-1-L-1	
L21AR 3/	1119S-2LRA	S71T6-2-L-1	
L31AR 3/	1119S-3LRA	S71T6-3-L-1	
L41AR 3/	1119S-4LRA	S71T6-4-L-1	
L51AR 3/	1119S-5LRA	S71T6-5-L-1	
L11DG 4/	1119S-1LCG	S71T6-1-L	
L21DG 4/	1119S-2LCG	S71T6-2-L	
L31DG 4/	1119S-3LCG	S71T6-3-L	
L41DG 4/	1119S-4LCG	S71T6-4-L	
L51DG 4/	1119S-5LCG	S71T6-5-L	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors - Continued.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
M11AR 3/	1119S-1LRAD	S71T6-1-L-1-BL	
M21AR 3/	1119S-2LRAD	S71T6-2-L-1-BL	
M31AR 3/	1119S-3LRAD	S71T6-3-L-1-BL	
M41AR 3/	1119S-4LRAD	S71T6-4-L-1-BL	
M51AR 3/	1119S-5LRAD	S71T6-5-L-1-BL	
M11DG 4/	1119S-1LCGD	S71T6-1-L-BL	
M21DG 4/	1119S-2LCGD	S71T6-2-L-BL	
M31DG 4/	1119S-3LCGD	S71T6-3-L-BL	
M41DG 4/	1119S-4LCGD	S71T6-4-L-BL	
M51DG 4/	1119S-5LCGD	S71T6-5-L-BL	
N11AR 3/	1119S-1LRADE	S71T6-1-L-1-BL-E	
N21AR 3/	1119S-2LRADE	S71T6-2-L-1-BL-E	
N31AR 3/	1119S-3LRADE	S71T6-3-L-1-BL-E	
N41AR 3/	1119S-4LRADE	S71T6-4-L-1-BL-E	
N51AR 3/	1119S-5LRADE	S71T6-5-L-1-BL-E	
N11DG 4/	1119S-1LCGDE	S71T6-1-L-BL-E	
N21DG 4/	1119S-2LCGDE	S71T6-2-L-BL-E	
N31DG 4/	1119S-3LCGDE	S71T6-3-L-BL-E	
N41DG 4/	1119S-4LCGDE	S71T6-4-L-BL-E	
N51DG 4/	1119S-5LCGDE	S71T6-5-L-BL-E	
P11AR 3/	1119S-1RRADE	S71T6-1-R-1-BL-E	
P21AR 3/	1119S-2RRADE	S71T6-2-R-1-BL-E	
P31AR 3/	1119S-3RRADE	S71T6-3-R-1-BL-E	
P41AR 3/	1119S-4RRADE	S71T6-4-R-1-BL-E	
P51AR 3/	1119S-5RRADE	S71T6-5-R-1-BL-E	
P11DG 4/	1119S-1RCGDE	S71T6-1-R-BL-E	
P21DG 4/	1119S-2RCGDE	S71T6-2-R-BL-E	
P31DG 4/	1119S-3RCGDE	S71T6-3-R-BL-E	
P41DG 4/	1119S-4RCGDE	S71T6-4-R-BL-E	
P51DG 4/	1119S-5RCGDE	S71T6-5-R-BL-E	
Q11AR 3/	1119S-1RRAD	S71T6-1-R-1-BL	
Q21AR 3/	1119S-2RRAD	S71T6-2-R-1-BL	
Q31AR 3/	1119S-3RRAD	S71T6-3-R-1-BL	
Q41AR 3/	1119S-4RRAD	S71T6-4-R-1-BL	
Q51AR 3/	1119S-5RRAD	S71T6-5-R-1-BL	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE IV. Commercial part number supersession data for aluminum alloy 6061 extractors - Continued.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
Q11DG 4/	1119S-1RCGD	S71T6-1-R-BL	
Q21DG 4/	1119S-2RCGD	S71T6-2-R-BL	
Q31DG 4/	1119S-3RCGD	S71T6-3-R-BL	
Q41DG 4/	1119S-4RCGD	S71T6-4-R-BL	
Q51DG 4/	1119S-5RCGD	S71T6-5-R-BL	
R11AR 3/	1119S-1RRA	S71T6-1-R-1	
R21AR 3/	1119S-2RRA	S71T6-2-R-1	
R31AR 3/	1119S-3RRA	S71T6-3-R-1	
R41AR 3/	1119S-4RRA	S71T6-4-R-1	
R51AR 3/	1119S-5RRA	S71T6-5-R-1	
R11DG 4/	1119S-1RCG	S71T6-1-R	
R21DG 4/	1119S-2RCG	S71T6-2-R	
R31DG 4/	1119S-3RCG	S71T6-3-R	
R41DG 4/	1119S-4RCG	S71T6-4-R	
R51DG 4/	1119S-5RCG	S71T6-5-R	
S11AR 3/	1119S-1RRAE	S71T6-1-R-1-E	
S21AR 3/	1119S-2RRAE	S71T6-2-R-1-E	
S31AR 3/	1119S-3RRAE	S71T6-3-R-1-E	
S41AR 3/	1119S-4RRAE	S71T6-4-R-1-E	
S51AR 3/	1119S-5RRAE	S71T6-5-R-1-E	
S11DG 4/	1119S-1RCGE	S71T6-1-R-E	
S21DG 4/	1119S-2RCGE	S71T6-2-R-E	
S31DG 4/	1119S-3RCGE	S71T6-3-R-E	
S41DG 4/	1119S-4RCGE	S71T6-4-R-E	
S51DG 4/	1119S-5RCGE	S71T6-5-R-E	

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A-A-59832.

2/ The finish and color designators for the PINs listed are either for red anodize (CID finish and color codes AR) or gold maximum corrosion protection (thick) chemical film (CID finish and color codes DG).

3/ See table III for the finish color designators for the other 9 anodize colors available.

4/ Low resistance chemical film finishes are also available in clear (CID finish and color code LC) and gold (CID finish and color codes MG).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
K12AB 3/	1109S-1LBAE	S71-1-L-5-E	
K22AB 3/	1109S-2LBAE	S71-2-L-5-E	
K32AB 3/	1109S-3LBAE	S71-3-L-5-E	
K42AB 3/	1109S-4LBAE	S71-4-L-5-E	
K52AB 3/	1109S-5LBAE	S71-5-L-5-E	
K12LC 4/	1109S-1LCCE	S71-1-L-CC3-E	
K22LC 4/	1109S-2LCCE	S71-2-L-CC3-E	
K32LC 4/	1109S-3LCCE	S71-3-L-CC3-E	
K42LC 4/	1109S-4LCCE	S71-4-L-CC3-E	
K52LC 4/	1109S-5LCCE	S71-5-L-CC3-E	
L12AB 3/	1109S-1LBA	S71-1-L-5	
L22AB 3/	1109S-2LBA	S71-2-L-5	
L32AB 3/	1109S-3LBA	S71-3-L-5	
L42AB 3/	1109S-4LBA	S71-4-L-5	
L52AB 3/	1109S-5LBA	S71-5-L-5	
L12LC 4/	1109S-1LCC	S71-1-L-CC3	
L22LC 4/	1109S-2LCC	S71-2-L-CC3	
L32LC 4/	1109S-3LCC	S71-3-L-CC3	
L42LC 4/	1109S-4LCC	S71-4-L-CC3	
L52LC 4/	1109S-5LCC	S71-5-L-CC3	
M12AB 3/	1109S-1LBAD	S71-1-L-5-BL	
M22AB 3/	1109S-2LBAD	S71-2-L-5-BL	
M32AB 3/	1109S-3LBAD	S71-3-L-5-BL	
M42AB 3/	1109S-4LBAD	S71-4-L-5-BL	
M52AB 3/	1109S-5LBAD	S71-5-L-5-BL	
M12LC 4/	1109S-1LCCD	S71-1-L-CC3-BL	
M22LC 4/	1109S-2LCCD	S71-2-L-CC3-BL	
M32LC 4/	1109S-3LCCD	S71-3-L-CC3-BL	
M42LC 4/	1109S-4LCCD	S71-4-L-CC3-BL	
M52LC 4/	1109S-5LCCD	S71-5-L-CC3-BL	
N12AB 3/	1109S-1LBADE	S71-1-L-5-BL-E	
N22AB 3/	1109S-2LBADE	S71-2-L-5-BL-E	
N32AB 3/	1109S-3LBADE	S71-3-L-5-BL-E	
N42AB 3/	1109S-4LBADE	S71-4-L-5-BL-E	
N52AB 3/	1109S-5LBADE	S71-5-L-5-BL-E	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors - Continued.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
N12LC 4/	1109S-1LCCDE	S71-1-L-CC3-BL-E	
N22LC 4/	1109S-2LCCDE	S71-2-L-CC3-BL-E	
N32LC 4/	1109S-3LCCDE	S71-3-L-CC3-BL-E	
N42LC 4/	1109S-4LCCDE	S71-4-L-CC3-BL-E	
N52LC 4/	1109S-5LCCDE	S71-5-L-CC3-BL-E	
P12AB 3/	1109S-1RBADE	S71-1-R-5-BL-E	
P22AB 3/	1109S-2RBADE	S71-2-R-5-BL-E	
P32AB 3/	1109S-3RBADE	S71-3-R-5-BL-E	
P42AB 3/	1109S-4RBADE	S71-4-R-5-BL-E	
P52AB 3/	1109S-5RBADE	S71-5-R-5-BL-E	
P12LC 4/	1109S-1RCCDE	S71-1-R-CC3-BL-E	
P22LC 4/	1109S-2RCCDE	S71-2-R-CC3-BL-E	
P32LC 4/	1109S-3RCCDE	S71-3-R-CC3-BL-E	
P42LC 4/	1109S-4RCCDE	S71-4-R-CC3-BL-E	
P52LC 4/	1109S-5RCCDE	S71-5-R-CC3-BL-E	
Q12AB 3/	1109S-1RBAD	S71-1-R-5-BL	
Q22AB 3/	1109S-2RBAD	S71-2-R-5-BL	
Q32AB 3/	1109S-3RBAD	S71-3-R-5-BL	
Q42AB 3/	1109S-4RBAD	S71-4-R-5-BL	
Q52AB 3/	1109S-5RBAD	S71-5-R-5-BL	
Q12LC 4/	1109S-1RCCD	S71-1-R-CC3-BL	
Q22LC 4/	1109S-2RCCD	S71-2-R-CC3-BL	
Q32LC 4/	1109S-3RCCD	S71-3-R-CC3-BL	
Q42LC 4/	1109S-4RCCD	S71-4-R-CC3-BL	
Q52LC 4/	1109S-5RCCD	S71-5-R-CC3-BL	
R12AB 3/	1109S-1RBA	S71-1-R-5	
R22AB 3/	1109S-2RBA	S71-2-R-5	
R32AB 3/	1109S-3RBA	S71-3-R-5	
R42AB 3/	1109S-4RBA	S71-4-R-5	
R52AB 3/	1109S-5RBA	S71-5-R-5	
R12LC 4/	1109S-1RCC	S71-1-R-CC3	
R22LC 4/	1109S-2RCC	S71-2-R-CC3	
R32LC 4/	1109S-3RCC	S71-3-R-CC3	
R42LC 4/	1109S-4RCC	S71-4-R-CC3	
R52LC 4/	1109S-5RCC	S71-5-R-CC3	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE V. Commercial part number supersession data for aluminum alloy 5032 extractors - Continued.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE 61081	CAGE
S12AB 3/	1109S-1RBAE	S71-1-R-5-E	
S22AB 3/	1109S-2RBAE	S71-2-R-5-E	
S32AB 3/	1109S-3RBAE	S71-3-R-5-E	
S42AB 3/	1109S-4RBAE	S71-4-R-5-E	
S52AB 3/	1109S-5RBAE	S71-5-R-5-E	
S12LC 4/	1109S-1RCCE	S71-1-R-CC3-E	
S22LC 4/	1109S-2RCCE	S71-2-R-CC3-E	
S32LC 4/	1109S-3RCCE	S71-3-R-CC3-E	
S42LC 4/	1109S-4RCCE	S71-4-R-CC3-E	
S52LC 4/	1109S-5RCCE	S71-5-R-CC3-E	

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A-A-59832.

2/ The finish and color designators for the PINs listed are either for clear low resistance chemical film (CID finish and color codes LC) or black anodize (CID finish and color codes AB).

3/ See table III for the color designators for the other 9 anodize colors available.

4/ Maximum corrosion protection (thick) chemical film is also available in gold (CID finish and color codes DG).

TABLE VI. Commercial part number supersession data for stainless steel extractors.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE	CAGE
K27PC	1129S-2LE		
K37PC	1129S-3LE		
K47PC	1129S-4LE		
K57PC	1129S-5LE		
L27PC	1129S-2L		
L37PC	1129S-3L		
L47PC	1129S-4L		
L57PC	1129S-5L		
M27PC	1129S-2LD		
M37PC	1129S-3LD		
M47PC	1129S-4LD		
M57PC	1129S-5LD		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VI. Commercial part number supersession data for stainless steel extractors - Continued.

PIN designator AA59832/06	Vendor similar designator or type part number 1/ 2/		
	CAGE 5BG68	CAGE	CAGE
N27PC	1129S-2LDE		
N37PC	1129S-3LDE		
N47PC	1129S-4LDE		
N57PC	1129S-5LDE		
P27PC	1129S-2RDE		
P37PC	1129S-3RDE		
P47PC	1129S-4RDE		
P57PC	1129S-5RDE		
Q27PC	1129S-2RD		
Q37PC	1129S-3RD		
Q47PC	1129S-4RD		
Q57PC	1129S-5RD		
R27PC	1129S-2R		
R37PC	1129S-3R		
R47PC	1129S-4R		
R57PC	1129S-5R		
S27PC	1129S-2RE		
S37PC	1129S-3RE		
S47PC	1129S-4RE		
S57PC	1129S-5RE		

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A-A-59832.

2/ The PINs listed are for passivation treatment (CID finish and color codes PC).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191-25ET	AA59832/06K11DG	84191-26ET	AA59832/06S11DG
84191-25EA	AA59832/06K12DG	84191-26EA	AA59832/06S12DG
84191-25PS	AA59832/06L17PC	84191-26PS	AA59832/06R17PC
84191-25CT	AA59832/06L11DG	84191-26CT	AA59832/06R11DG
84191-25CA	AA59832/06L12DG	84191-26CA	AA59832/06R12DG
84191-25*T 1/	AA59832/06L11A# 2/	84191-26*T 1/	AA59832/06R11A# 2/
84191-25*A 1/	AA59832/06L12A# 2/	84191-26*A 1/	AA59832/06R12A# 2/
84191-25PSBL	AA59832/06M17PC	84191-26PSBL	AA59832/06Q17PC
84191-25CTBL	AA59832/06M11DG	84191-26CTBL	AA59832/06Q11DG
84191-25CABL	AA59832/06M12DG	84191-26CABL	AA59832/06Q12DG
84191-25*TBL 1/	AA59832/06M11A# 2/	84191-26*TBL 1/	AA59832/06Q11A# 2/
84191-25*ABL 1/	AA59832/06M12A# 2/	84191-26*ABL 1/	AA59832/06Q12A# 2/
84191-25ETBL	AA59832/06N11DG	84191-26ETBL	AA59832/06P11DG
84191-25EABL	AA59832/06N12DG	84191-26EABL	AA59832/06P12DG
84191-27ET	AA59832/06K21DG	84191-28ET	AA59832/06S21DG
84191-27EA	AA59832/06K22DG	84191-28EA	AA59832/06S22DG
84191-27PS	AA59832/06L27PC	84191-28PS	AA59832/06R27PC
84191-27CT	AA59832/06L21DG	84191-28CT	AA59832/06R21DG
84191-27CA	AA59832/06L22DG	84191-28CA	AA59832/06R22DG
84191-27*T 1/	AA59832/06L21A# 2/	84191-28*T 1/	AA59832/06R21A# 2/
84191-27*A 1/	AA59832/06L22A# 2/	84191-28*A 1/	AA59832/06R22A# 2/
84191-27PSBL	AA59832/06M27PC	84191-28PSBL	AA59832/06Q27PC
84191-27CTBL	AA59832/06M21DG	84191-28CTBL	AA59832/06Q21DG
84191-27CABL	AA59832/06M22DG	84191-28CABL	AA59832/06Q22DG
84191-27*TBL 1/	AA59832/06M21A# 2/	84191-28*TBL 1/	AA59832/06Q21A# 2/
84191-27*ABL 1/	AA59832/06M22A# 2/	84191-28*ABL 1/	AA59832/06Q22A# 2/
84191-27ETBL	AA59832/06N21DG	84191-28ETBL	AA59832/06P21DG
84191-27EABL	AA59832/06N22DG	84191-28EABL	AA59832/06P22DG

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information - Continued.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191-29ET	AA59832/06K31DG	84191-30ET	AA59832/06S31DG
84191-29EA	AA59832/06K32DG	84191-30EA	AA59832/06S32DG
84191-29PS	AA59832/06L37PC	84191-30PS	AA59832/06R37PC
84191-29CT	AA59832/06L31DG	84191-30CT	AA59832/06R31DG
84191-29CA	AA59832/06L32DG	84191-30CA	AA59832/06R32DG
84191-29*T 1/	AA59832/06L31A# 2/	84191-30*T 1/	AA59832/06R31A# 2/
84191-29*A 1/	AA59832/06L32A# 2/	84191-30*A 1/	AA59832/06R32A# 2/
84191-29PSBL	AA59832/06M37PC	84191-30PSBL	AA59832/06Q37PC
84191-29CTBL	AA59832/06M31DG	84191-30CTBL	AA59832/06Q31DG
84191-29CABL	AA59832/06M32DG	84191-30CABL	AA59832/06Q32DG
84191-29*TBL 1/	AA59832/06M31A# 2/	84191-30*TBL 1/	AA59832/06Q31A# 2/
84191-29*ABL 1/	AA59832/06M32A# 2/	84191-30*ABL 1/	AA59832/06Q32A# 2/
84191-29ETBL	AA59832/06N31DG	84191-30ETBL	AA59832/06P31DG
84191-29EABL	AA59832/06N32DG	84191-30EABL	AA59832/06P32DG
84191-31ET	AA59832/06K41DG	84191-32ET	AA59832/06S41DG
84191-31EA	AA59832/06K42DG	84191-32EA	AA59832/06S42DG
84191-31PS	AA59832/06L47PC	84191-32PS	AA59832/06R47PC
84191-31CT	AA59832/06L41DG	84191-32CT	AA59832/06R41DG
84191-31CA	AA59832/06L42DG	84191-32CA	AA59832/06R42DG
84191-31*T 1/	AA59832/06L41A# 2/	84191-32*T 1/	AA59832/06R41A# 2/
84191-31*A 1/	AA59832/06L42A# 2/	84191-32*A 1/	AA59832/06R42A# 2/
84191-31PSBL	AA59832/06M47PC	84191-32PSBL	AA59832/06Q47PC
84191-31CTBL	AA59832/06M41DG	84191-32CTBL	AA59832/06Q41DG
84191-31CABL	AA59832/06M42DG	84191-32CABL	AA59832/06Q42DG
84191-31*TBL 1/	AA59832/06M41A# 2/	84191-32*TBL 1/	AA59832/06Q41A# 2/
84191-31*ABL 1/	AA59832/06M42A# 2/	84191-32*ABL 1/	AA59832/06Q42A# 2/
84191-31ETBL	AA59832/06N41DG	84191-32ETBL	AA59832/06P41DG
84191-31EABL	AA59832/06N42DG	84191-32EABL	AA59832/06P42DG

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession information − Continued.

Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84191	Superseding (new) CID PIN
84191−39ET	AA59832/06K51DG	84191−40ET	AA59832/06S51DG
84191−39EA	AA59832/06K52DG	84191−40EA	AA59832/06S52DG
84191−39PS	AA59832/06L57PC	84191−40PS	AA59832/06R57PC
84191−39CT	AA59832/06L51DG	84191−40CT	AA59832/06R51DG
84191−39CA	AA59832/06L52DG	84191−40CA	AA59832/06R52DG
84191−39*T 1/	AA59832/06L51A# 2/	84191−40*T 1/	AA59832/06R51A# 2/
84191−39*A 1/	AA59832/06L52A# 2/	84191−40*A 1/	AA59832/06R52A# 2/
84191−39PSBL	AA59832/06M57PC	84191−40PSBL	AA59832/06Q57PC
84191−39CTBL	AA59832/06M51DG	84191−40CTBL	AA59832/06Q51DG
84191−39CABL	AA59832/06M52DG	84191−40CABL	AA59832/06Q52DG
84191−39*TBL 1/	AA59832/06M51A# 2/	84191−40*TBL 1/	AA59832/06Q51A# 2/
84191−39*ABL 1/	AA59832/06M52A# 2/	84191−40*ABL 1/	AA59832/06Q52A# 2/
84191−39ETBL	AA59832/06N51DG	84191−40ETBL	AA59832/06P51DG
84191−39EABL	AA59832/06N52DG	84191−40EABL	AA59832/06P52DG

1/ The asterisk "*" denotes the anodize aluminum finish colors for DESC Drawing 84191.
2/ The pound sign "#" denotes the anodize aluminum finish colors of table III herein.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Army − CR
Navy − EC
Air Force − 85
DLA − CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA − FAS

Preparing Activity:
DLA − CC

Project: 5998−2024−009

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:29Z
Check the source to verify that this is the current version before use.