MIL-B-46966(MU)
27 December 1963
(See section 6)

MILITARY SPECIFICATION

BURSTER, BOMB, M32

1. SCOPE

1.1 This specification covers one type of burster.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-F-320 - Fiberboard; Sheet, Stock and Cut Shapes.
PPP-T-66 - Tape: Pressure-Sensitive Adhesive, Vinyl Plastic Film.

MILITARY

MIL-C-3955 - Cans, Fiber, Spirally Wound.

STANDARDS

FEDERAL

Fed Std No 595 - Colors.

FSC 1325

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

DRAWINGS

EDGEWOOD ARSENAL

DL14-5-2744 - Burster, Bomb, M32.
(All drawings referenced in this specification are listed on Dwg DL14-5-2744.)

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Materials. All materials cited on Drawing DL14-5-2744 or on subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings.

3.1.2 Components. All components of the burster shall conform to the specifications and drawings listed on Drawing DL14-5-2744 and subsidiary drawings.

3.2 Assembly and marking. The burster shall be assembled and marked in accordance with Drawing C14-5-2744.

3.3 Weight. The burster shall contain a minimum of 15.0 pounds of composition B.

3.4 Workmanship. The burster shall be free from contamination (grease or foreign matter) and damage such as dents or deformation which could affect its use.

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Special provisions.

4.2.1 Alternative inspection. The supplier may utilize any alternative inspection procedure which will provide equal or better assurance of quality by submitting a written proposal with justification and obtaining written approval from the Government prior to instituting the procedure. In case of dispute, the procedures of this specification will govern.

4.2.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

4.3 Lotting. A lot shall consist of the bursters produced by one manufacturer, at one plant, from the same materials, under essentially the same manufacturing conditions. However, no more than one lot of composition B shall be represented in any one lot of finished bursters.

4.4 Sampling for examination. Sampling shall be conducted in accordance with Standard MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the current version before use.

4.5 Inspection provision for examination. Sample burster shall be examined in accordance with the classification of defects and Standard MIL-STD-105.

4.5.1 Classification of defects.

4.5.1.1 Burster, bomb, M32 (C14-5-2744).

Categories		Defects
Critical:		None defined
Major:		AQL 1.0 percent defective
	101	Weight incorrect (comp B)
	102	Length incorrect
	103	Outside diameter incorrect
	104	Component missing or incorrectly assembled
	105	Marking missing, incorrect or illegible
	106	Workmanship (3.4)

4.5.1.2 Preparation for delivery (section 5).

Categories		Defects
Critical:		None defined
Major:		AQL 2.5 percent defective
	101	Package method incorrect
	102	Closure seam of can not sealed as specified
	103	Loose package
	104	Pack in excess of specified weight limitations
	105	Filler pads missing or insufficient to make a tight pack
	106	Strapping not as specified
	107	Marking missing, illegible or incorrect

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging, level A. Each burster shall be individually packaged in a can conforming to type II, grade B, style b, class 4 of Specification MIL-C-3955. The inside dimensions of the can shall be approximately 32-1/2 inches in length by 3-1/2 inches in diameter. A round filler pad, of type CF, class-weather resistant fiberboard conforming to Specification PPP-F-320 and cut to fit snugly, shall be placed in each end of the can. Additional filler pads shall be used, if needed, to make a tight pack. The closure seam of the can shall be sealed and color coded with minimum 1-1/2 inch wide tape conforming to type I, class B, color yellow No. 23538 or 33538 of Specification PPP-T-66. Cited color number shall conform to Standard, Federal Std No. 595.


5.2 Packing. Levels shall be as specified (see 6.2).

5.2.1 Level A. Bursters, packaged as specified in 5.1, shall be packed not to exceed a gross weight of 150 pounds in a box conforming to class 2, style 2 or 2-1/2 of Specification PPP-B-621. The top, bottom, sides and ends of the box shall be fitted with filler pads made of type CF, class-weather resistant fiberboard conforming to Specification PPP-F-320. Additional filler pads shall be used, if needed, to make a tight pack. Galvanized strapping shall be used in closure and strapping of the container.

5.2.2 Level B. Twenty bursters packaged as specified in 5.1, shall be packed as specified in 5.2.1, except that the box shall conform to class 1, style 2 or 2-1/2 of Specification PPP-B-621 and coated-finish strapping shall be used.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages and shipping containers shall be marked in accordance with Standard MIL-STD-129. Color code marking shall be as shown on figure 1.

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the currentversion before use.

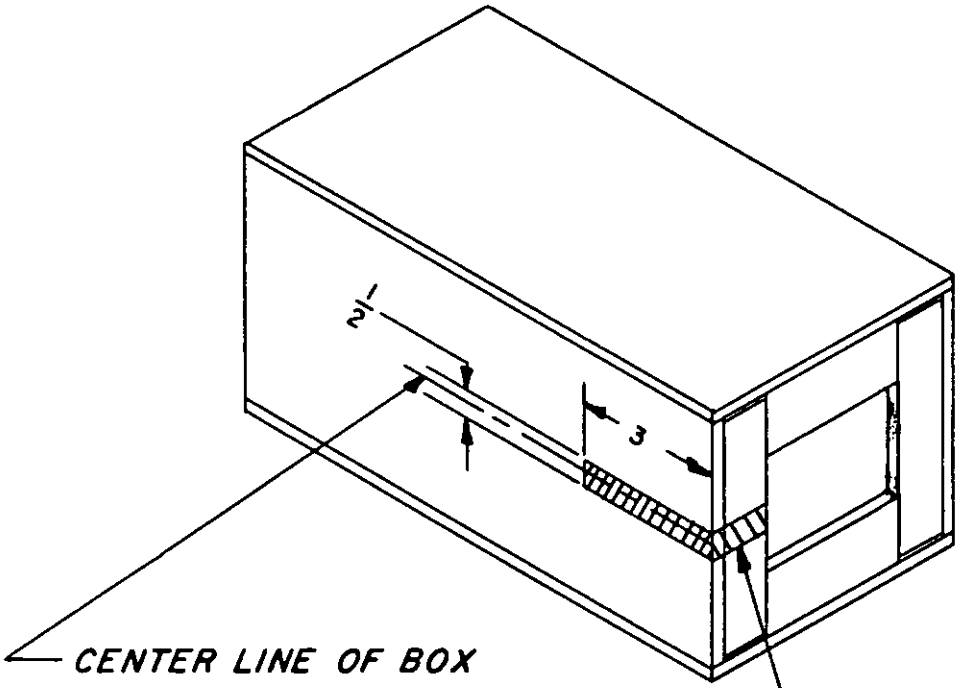

HIGH EXPLOSIVE IDENTIFICATION

MARK CORNER OF BOX AS SHOWN, A COLOR YELLOW NO. 23538 OR 33538 STRIPE.

Fig. 1

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. This item is intended for use as a burster element to rupture the MC-1 bomb and disperse the chemical agent contained in the bomb.

6.2 Ordering data. Procurement documents should specify the following:

(a) The title, number and date of this specification.
(b) Level of packing required.

6.3 Caution. Suppliers are advised to take all necessary precautions to protect personnel while loading and assembling in accordance with this specification.

6.4 Safety classification. This item carries the following Ordnance safety classification:

Storage compatibility group B

Explosive hazard - 10

6.5 Supersession data. This specification supersedes Chemical Corps Purchase Description 196-131-737, dated 3 November 1961.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1325-A103

Source: https://assist.dla.mil -- Downloaded: 202640-22T07:26Z
Check the source to verify that this is the current version before use.