MILITARY SPECIFICATION

HANDSET-HEADSET H-108( )/H

AND CORD CX-1245( )/U (7 ft 6 in)

1. Scope

1.1 Scope. --This specification covers one type of handset-headset and cord, designated Handset-Headset H-108( )/U and Cord CX-1245( )/U (7 ft 6 in).

1.2 Nomenclature. --The parenthesis appearing in the nomenclature will be dropped or replaced by a letter, to indicate the particular design, upon application to the procuring activity.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

NN-B-621	Boxes, Wood, Nailed and Lock-Corner
NN-P-515	Plywood, Container Grade
QQ-A-318	Aluminum Alloy 52S; Plate and Sheet
LLL-B-631	Boxes; Fiber Corrugated (For Domestic Shipment
LLL-B-636	Boxes; Fiber, Solid, (For Domestic Shipment)
PPP-B-601	Boxes, Wood Cleated-Plywood

Military

JAN-P-100	Packaging and Packing for Overseas Shipment, General Specification
JAN-P-103	Packaging and Packing for Overseas Shipment Boxes; Wood Cleated; Solid Fiberboard
JAN-P-106	Boxes; Wood, Nailed (Overseas Type)
JAN-P-108	Boxes, Fiberboard, Corrugated and Solid (Military Type)
MIL-P-116	Preservation, Methods Of
MIL-B-121	Barrier Material, Greaseproofed, Flexible (Waterproofed)
MIL-B-130	Barrier-Material, Paper, Noncorrosive
MIL-A-148	Aluminum Foil
JAN-P-642	Plugs, Telephone
MIL-C-3849	Cord, Electrical (Tinsel)
MIL-E-4158	Electronic Equipment, Ground; General Requirements For
MIL-P-4185	Paper, Tissue, Wrapping
MIL-T-4807	Tests; Vibration and Shock Ground Electronic Equipment (Requirements For)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:24Z
Check the source to verify that this is the current version before use.

MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For
MIL-T-9107	Test Reports; Preparation Of
MIL-L-10547	Liners, Case, Waterproof

STANDARDS
Military

MIL-STD-129	Marking For Shipment and Storage
MS20003	Indicator-Humidity, Card, Three Spot Impregnated Areas

(Copies of applicable documents required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.--The following publications of the issue in effect on date of invitation for bids, unless otherwise stated, form a part of this specification:

Consolidated Classification Committee
Consolidated Freight Classification Rules

(Applications for copies should be addressed to the Consolidated Classification Committee, 202 Chicago Union Station, Chicago 6, Illinois).

American Standards Association

Z24.4	Pressure Calibration of Laboratory Standard Pressure Microphones, Method for the

(Copies of ASA Standards may be obtained from the American Standards Association, Incorporated, 70 East 45th Street, New York 17, New York).

3. REQUIREMENTS

3.1 Preproduction sample.--This specification requires the submission of preproduction samples for preproduction testing. See section 4 for details.

3.2 Standard sample.--A standard sample handset-headset and cord shall serve to demonstrate the minimum acceptable standard of materials, design, workmanship and performance not specified herein. In the event of conflict between the standard sample and the requirements of this specification, the specification shall govern over the standard sample (see 3.8).

3.3 Components.--The handset-headset and cord shall consist of the following:

Item	Quantity	Description	Requirement
1	1 each	Handset-Headset H-108( )/U	3.7.1
2	1 each	Cord CX-1245( )/U(7 ft 6 in)	3.7.2

Source: https://assist.dla.mil -- Downloaded: 202610-20T10:24Z
Check the source to verify that this is the current version before use.

3.4 Design and contruction. --The handset-headset shall consist of a headband assembly and a handset. The headband shall be attached to the receiver housing by means of a movable metal band with an adjustment block and a metal fork. The handset, an assembly of the receiver housing, shall consist of a hollow square boom anchored inside the receiver housing on one end, and a transmitter housing anchored on the other end. The receiver and transmitter housing shall each have a screw cap for holding the elements in place. The square boom shall contain the wiring between the transmitter and receiver elements with the wiring connected to terminals in the transmitter and receiver units. The receiver housing shall also have a removable cover over the terminals which shall be attached to a cord terminating at the free end in a three-conductor polarized plug.

3.4.1 Receiver element. --The handset-headset receiver element shall be Western Electric Co. Type HC-3, or equal.

3.4.2 Transmitter element. --The handset-headset transmitter element shall be a carbon type, Western Electric Co. Type N-1 microphone, or equal.

3.5 Performance

3.5.1 Receiver element

3.5.1.1 Impedance. --The impedance of the receiver element at 1000 cps shall be between 250 and 300 ohms.

3.5.1.2 Leakage resistance. --Insulation between the case and terminals shall be provided. The insulation shall be capable of withstanding test requirements specified in 4.3.2.4b without breakdown or decrease of the insulation resistance below 1 megohm between these points.

3.5.1.3 Distortion. --The acoustic output of the receiver element shall be free from serious objectionable distortion over the audio frequency range of 200 to 500 cps as judged by ear.

3.5.1.4 Over-voltage. --The response of the receiver element shall show not more than 3 db change from the original response values.

3.5.1.5 Frequency response. --The output shall be not lower than the minimum limits shown on figure 1. In addition, the response shall fall within the envelope as shown on figure 2.

3.5.2 Microphone element

3.5.2.1 Impedance. --The microphone element shall have an impedance between 15 and 30 ohms at 1000 cps.

3.5.2.2 Unagitated current. --The unagitated current shall not exceed 130 milliamperes.

3.5.2.3 Frequency response. --The frequency response of the microphone element shall be within the limits of figure 3 when measured in the vertical position. It shall be essentially smooth and devoid of any pronounced dips,

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:24Z
Check the source to verify that this is the current version before use.

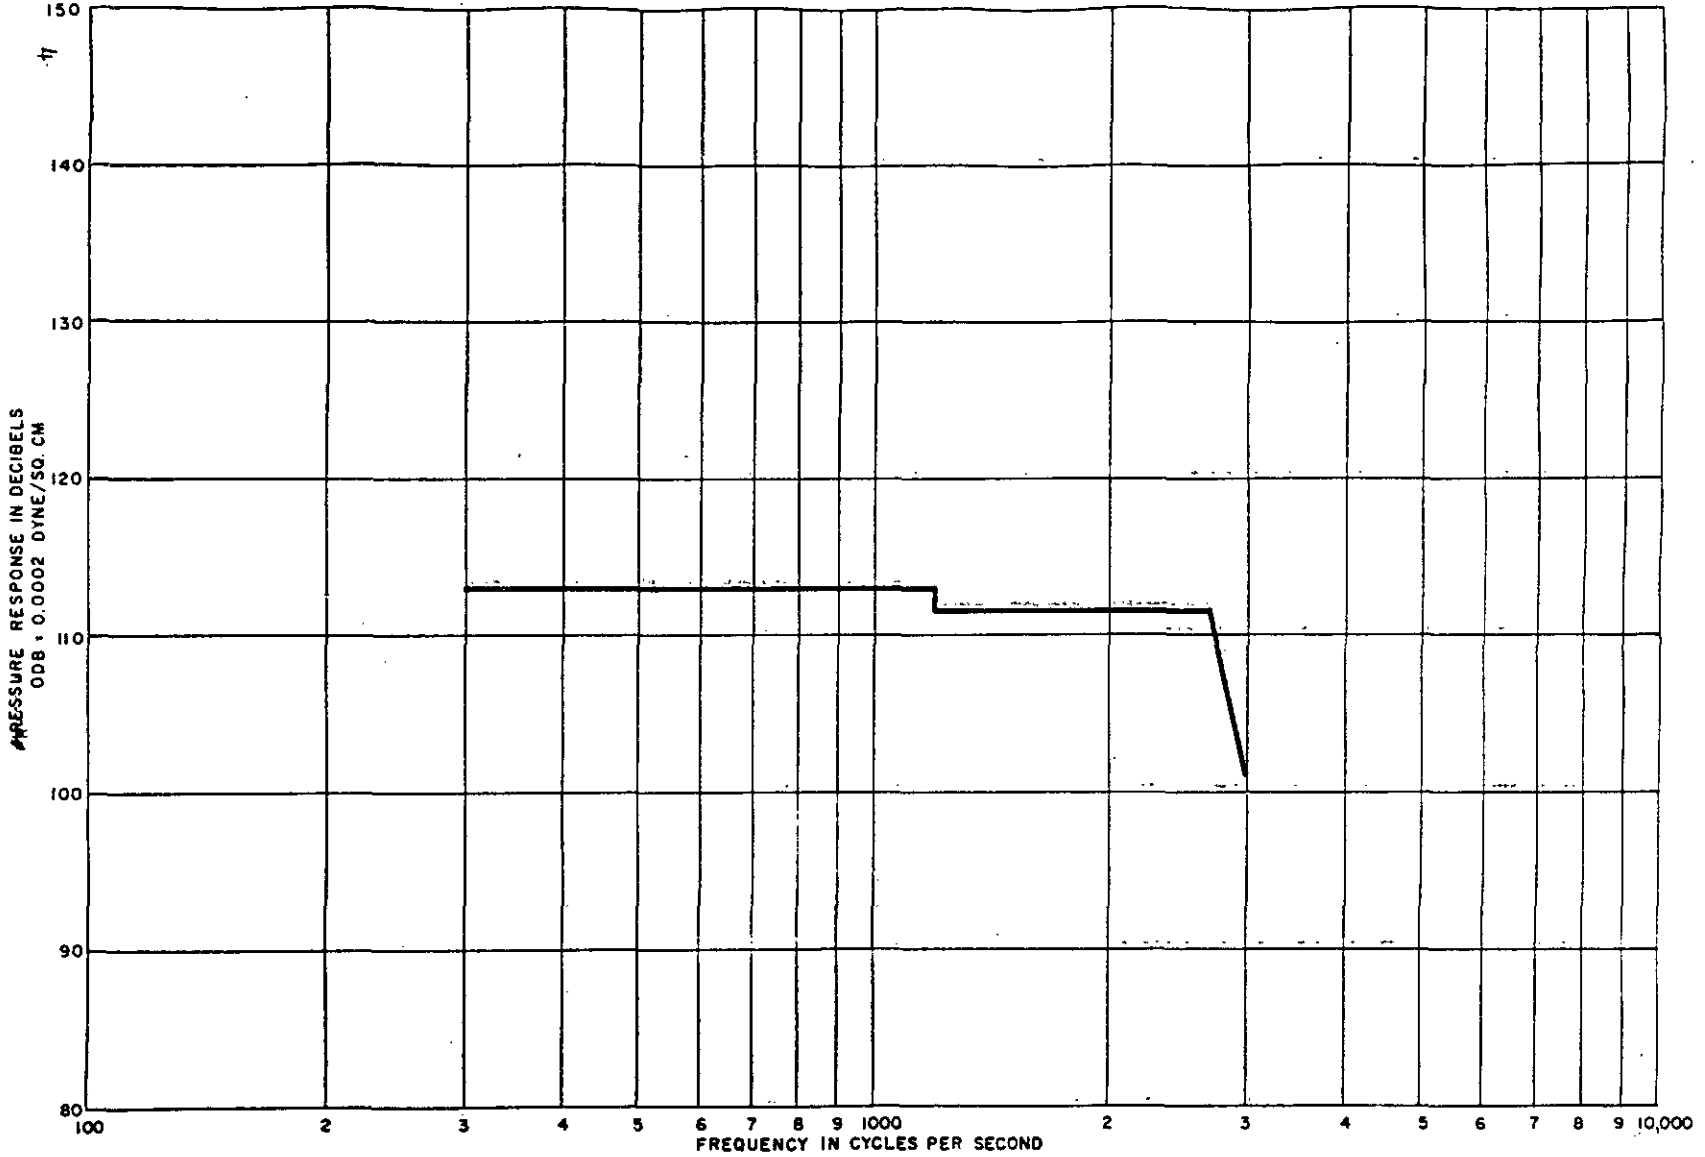


FIGURE I. MINIMUN RESPONSE LIMITS FOR RECEIVER ELEMENT.

Source: https://assist.dla.mil -- Downloaded: 20261[illegible]-20T10:24Z
Check the source to verify that this is the current version before use.

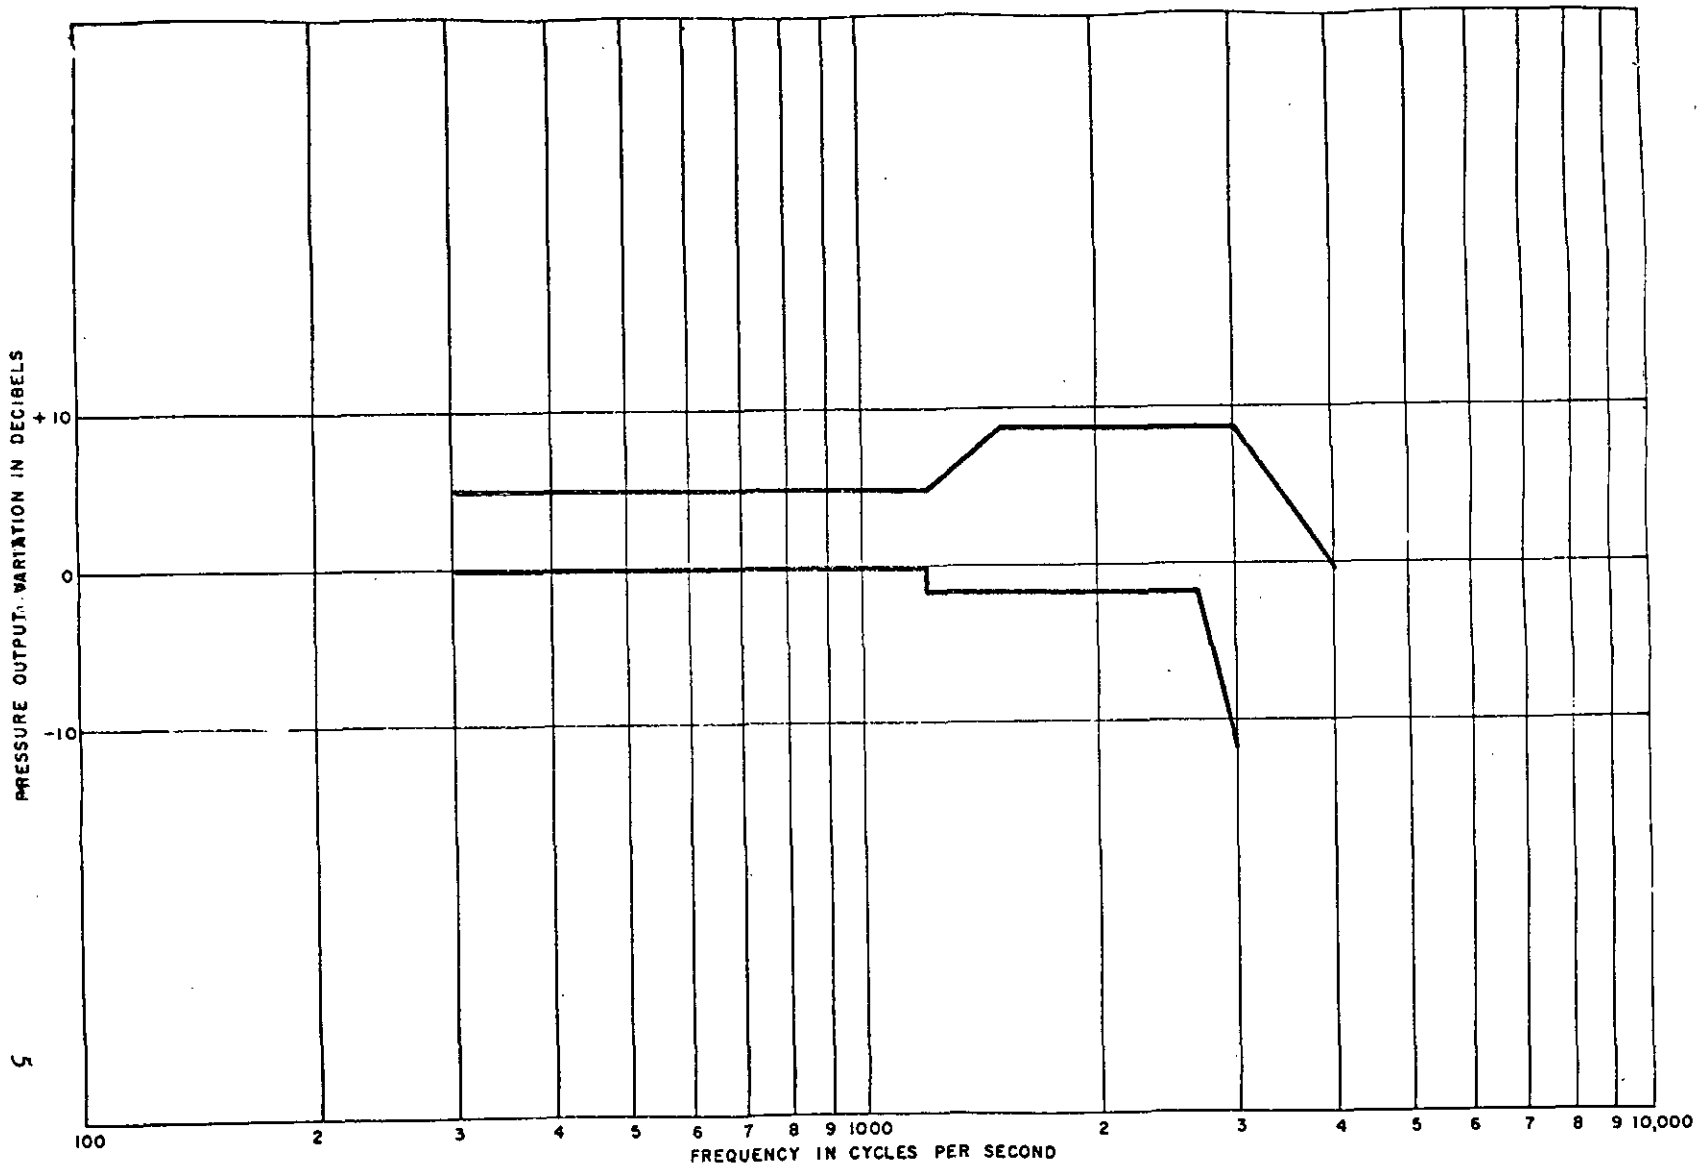


FIGURE 2. RATE OF CHANGE ENVELOPE FOR RECEIVER ELEMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:24Z
Check the source to verify that this is the current version before use.

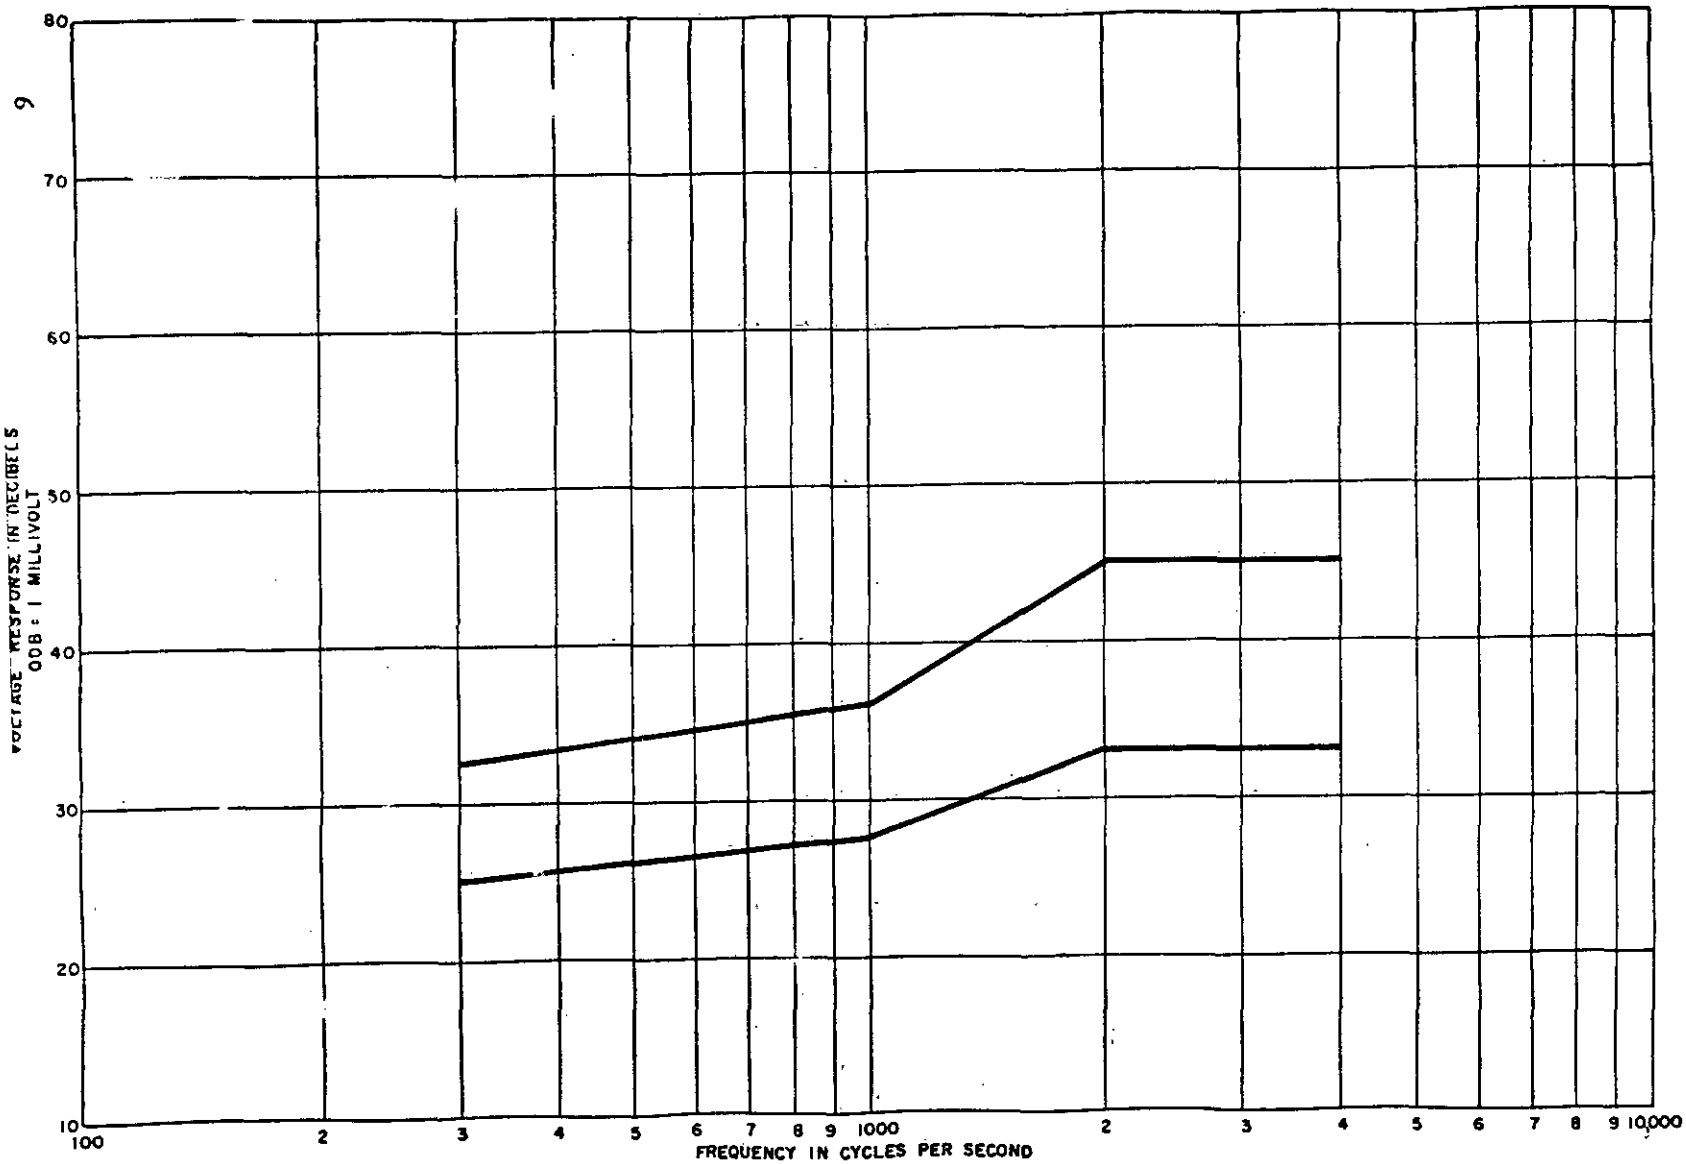


FIGURE 3. RESPONSE LIMITS FOR MICROPHONE ELEMENTS

Source: https://assist.dla.mil -- Downloaded: 20261[illegible]-20T10:24Z
Check the source to verify that this is the current version before use.

or peaks. For any bandwidth for the various frequency ranges indicated below, the change in response from the lowest to the highest frequency in the band shall not exceed the following limits:

Frequency range (cps)	Bandwidth (cps)	Change in response (db)
300 to 1000	100	≠3.5 to -1.0
1000 to 2000	300	≠5.0 to -2.0
2000 to 3000	300	≠5.0 to -4.0
3000 to 4000	500	≠5.0 to -5.0

3.5.2.3.1 The response of the microphone element, at each test frequency in each of the other three test positions, shall not vary more than 5 db from response in the vertical position.

3.5.2.4 Low voltage.--The response of the microphone element shall be not less than the limits shown below.

Frequency (cps)	Response (dbm)
300	27
500	28
1000	29
2000	37
3000	40
4000	40

3.5.3 Switch performance.--The potential drop across any pair of contacts of the switch shall not exceed 0.0002 volts, with the contacts carrying 100 milliamperes dc. The switch shall be capable of being operated 100,000 consecutive operations on each contact under normal operating conditions without any degradation in performance.

3.6 General specification.--The requirements of Specification MIL-E-4158 apply as requirements of this specification. Where the requirements of the general specification and this specification conflict, the requirements of this specification shall govern. Exceptions and additions to the general specification shall be as follows:

3.6.1 Ambient temperature

a. Operating: -54° to ≠52°C
b. Nonoperating: -62° to ≠71°C

3.6.2 Service conditions (mechanical).--This equipment shall not suffer damage nor fail to give the required performance when subjected to conditions encountered during operation, storage and transit.

3.6.3 Service conditions (electrical).--The equipment shall be designed to operate from a 24≠ 4 volts, d-c, power source.

Source: https://assist.dla.mil -- Downloaded: 202640-20T10:24Z
Check the source to verify that this is the current version before use.

3.6.4 Service life.--The equipment shall be capable of operating 24 hours per day for a period of 2 years with only normal maintenance and without major overhaul. The operational period may start after an initial storage period not exceeding 2 years.

3.6.5 Three-conductor cord.--The three-conductor tinsel cord shall be in accordance with Specification MIL-C-3849.

3.6.6 Insulation material.--Insulation material shall not support rapid combustion. The material used shall be sufficiently rigid and free from cold flow to maintain its function.

3.6.7 Aluminum.--Aluminum shall be in accordance with Specification QQ-A-318.

3.6.8 Qualification of welders.--Qualification of welders shall not apply.

3.7 Details of components

3.7.1 Handset-Headset H-108( )/U.--The handset-headset shall consist of a headband assembly, receiver housing, transmitter housing, and square boom.

3.7.1.1 Headband assembly.--The headband shall be made of spring wire covered with material which shall provide a maximum degree of traction. Dimensions shall be 2 inches wide by 9-7/8 inches long, which shall be adjustable to a minimum of 11-1/8 inches in length. Attachment of the headband assembly to the headset shall permit a 360-degree rotation around the receiver housing (earphone end). This shall be accomplished by including sufficient detents on the headband assembly (see 3.7.1.3).

3.7.1.2 Tension.--There shall be sufficient tension in the headband assembly to hold the handset-headset in a fixed position during prolonged operation. The tension shall not create pressure points which would produce discomfort to the operator. The tension shall be capable of accommodating heads ranging from 5.52 to 6.45 inches in breadth.

3.7.1.3 Receiver housing.--The circular slot which accepts the rotating headband assembly shall include a series of detents to permit the transmitter to remain in a desired fixed position.

3.7.1.3.1 Magnetic circuit.--Magnetization of the permanent magnet shall be accomplished by saturation following which the magnet shall be stabilized by reducing the magnetization to that required by the particular design.

3.7.1.4 Transmitter housing.--The transmitter housing shall be constructed of a rigid thermoplastic material. It shall consist of a screw type cap for securing the transmitter unit and shall be capable of being anchored to the square boom.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T10:24Z
Check the source to verify that this is the current version before use.

3.7.1.5 Square boom.--The square boom shall be fabricated as one continuous piece without intermediate connections such as welds, screw connections, et cetera.

3.7.2 Cord CX-1245( )/U (7 ft 6 in).--The cord assembly shall consist of retractile cord, Koil Kord, or equal, terminated at one end in a Plug PJ-068, Specification JAN-P-642. The other end shall terminate in a single-pole, single-throw, push-to-talk switch, Connecticut Telephone and Electric Corporation Type D-14748, or equal (see 3.5.3). Color coding shall be as follows:

a. Tip (black) of Plug PJ-068 through switch contacts to one side of transmitter.
b. Ring (red) of Plug PJ-068 to other side of transmitter and one side of receiver. This conductor shall be common to one side of the transmitter and to one side of the receiver.
c. Sleeve (white) of Plug PJ-068 to other side of receiver.

3.8 Government-loaned property.--When provided for in the contract or purchase order, the following item will be furnished by the government on loan to the contractor upon his request:

One each Handset-Headset H-108/U and Cord CX-1245/U(7 ft 6 in)

4. QUALITY ASSURANCE PROVISIONS

4.1 Classification of tests.--The inspection and testing of handset-headset and cord shall be classified as follows:

a. Preproduction tests.--Preproduction tests are those tests accomplished on a sample representative of the production equipment, to determine that the production equipment meets the requirements of this specification.

b. Acceptance tests.--Acceptance tests are those tests accomplished on the equipment submitted for acceptance under contract.

4.2 Test conditions.--Unless otherwise specified herein, tests shall be conducted at prevailing room conditions.

4.2.1 Preproduction samples shall be made and assembled by tools and methods that will be used for quantity production and shall be accomplished by a statement to that effect.

4.2.2 Test coupler.--The preproduction samples shall be accompanied by a 6cc (coupler calibration) coupler, or equal, that shall be used for testing the receiver elements. Complete manufacturer's drawings of this 6cc coupler shall also be submitted. The coupler and the drawings will be returned to the contractor upon approval of samples or termination of contract.

4.3 Preproduction tests

Source: https://assist.dla.mil -- Downloaded: 20260-20T10:24Z
Check the source to verify that this is the current version before use.

4.3.1 Preproduction test samples.--The following items as specified in the contract will be tested for design approval by the procuring activity, or when so specified in the contract, at the contractors' plant under the supervision of the procuring activity:

a. 12 each Handset-Headset H-108( )/U and Cord CX-1245( )/U (7 ft 6 in)
b. 8 each Receiver elements
c. 8 each Microphone elements

4.3.1.1 When microphone or earphone elements alone are on order, 20 samples of each element shall be required.

4.3.1.2 Preproduction test report.--When preproduction tests are conducted by the contractor, three copies of a complete report shall be furnished to the procuring activity. The preproduction test report shall be in accordance with Specification MIL-T-9107.

4.3.2 The preproduction tests shall consist of the individual tests and the following tests:

4.3.2.1 Environmental tests.--The equipment shall be subjected to the following environmental conditions in accordance with Specification MIL-E-5272, with the following exceptions:

a. High temperature test (nonoperating).--Procedure I.

b. Low temperature test (nonoperating).--Procedure II.

c. Humidity test.--Procedure II: Duration of test shall be 50 hours.

d. Altitude test (operating).--Procedure I: Duration of test shall be 4 hours.

e. Altitude test (nonoperating).--Repeat Procedure I at an absolute pressure of 5.54 inches of mercury (pressure at approximately 40,000 feet above sea level) for 4 hours, but do not operate the equipment. Visually examine the equipment in accordance with the specification.

f. Sand and dust test.--Procedure I.

g. Fungus resistance test.--Procedure I.

h. Salt spray test.-- Procedure I: Duration of test shall be 100 hours.

4.3.2.2 Vibration test.--The handset-headset shall be subjected to a vibration test in accordance with Specification MIL-T-4807, Method 1B.

4.3.2.3 Drop test.--The equipment shall be dropped six times at random from a height of 6 feet. Impact at the bottom shall be made on a 3/16--inch horizontal sheet of Masonite, or equal, (Brinell hardness No. 11 to No. 12)

Source: https://assist.dla.mil -- Downloaded: 202610-20T10:24Z
Check the source to verify that this is the current version before use.

backed by concrete. The equipment shall transmit and receive intelligibly after the test. There shall be no mechanical failure, such as cracking or breaking of parts. Minor chipping of plastic parts shall not constitute a failure. The equipment shall not suffer degradation in its performance of more than 3 db for the microphone element and 2 db for the receiver element.

4.3.2.4 Receiver element. --Unless otherwise specified, the receiver element shall be in its housing and subjected to the following tests:

a. Impedance. --With the receiver element in its housing and located on the 6cc coupler, the impedance shall be measured with 1 volt at 1000 cps applied to the receiver element terminals. This shall be accomplished by either measuring the voltage across and the current through the receiver element or with an impedance bridge. The results shall be as specified in 3.5.1.1.

b. Leakage resistance. --A 500-volt rms, 60-cycle, a-c signal shall be applied between the case and the terminals for a period of 5 seconds. Results shall be as specified in 3.5.1.2.

c. Distortion. --A voltage of 2.5 volts in the frequency range of 200 to 500 cps shall be applied across the terminals of the receiver element in series with a 275-ohm resistor. It shall then meet the requirements specified in 3.5.1.3.

d. Over-voltage. --Ten volts at 400 cps shall be applied directly across the receiver element terminals for 10 hours. It shall then meet the requirements specified in 3.5.1.4.

e. Frequency response. --The response of the receiver element shall be measured in the test circuit shown in figure 4. A Western Electric Company 640 AA Standard pressure microphone, or equal, calibrated according to American Standards Association Specification Z24.4/164 shall be used to measure response of the receiver element. A good seal shall be obtained between the receiver housing and the 6cc test coupler. Frequency response of the receiver element shall be determined from 300 to 4000 cps at frequencies which indicate the over-all response characteristics and the output level of the receiver element. The "constant available power" input to the receiver element shall be 1 milliwatt. Therefore, the audio oscillator shall be set to give a reading of 1.05 volts at each test frequency as measured on the vacuum tube voltmeter (VTVM) No. 1. The response of the receiver element shall be measured on VTVM No. 2 and shall be as specified in 3.5.1.5.

4.3.2.5 Microphone element. --Unless otherwise specified, the microphone element shall be in its housing and subjected to the following tests:

Source: https://assist.dla.mil -- Downloaded: 202610-20T10:24Z
Check the source to verify that this is the current version before use.

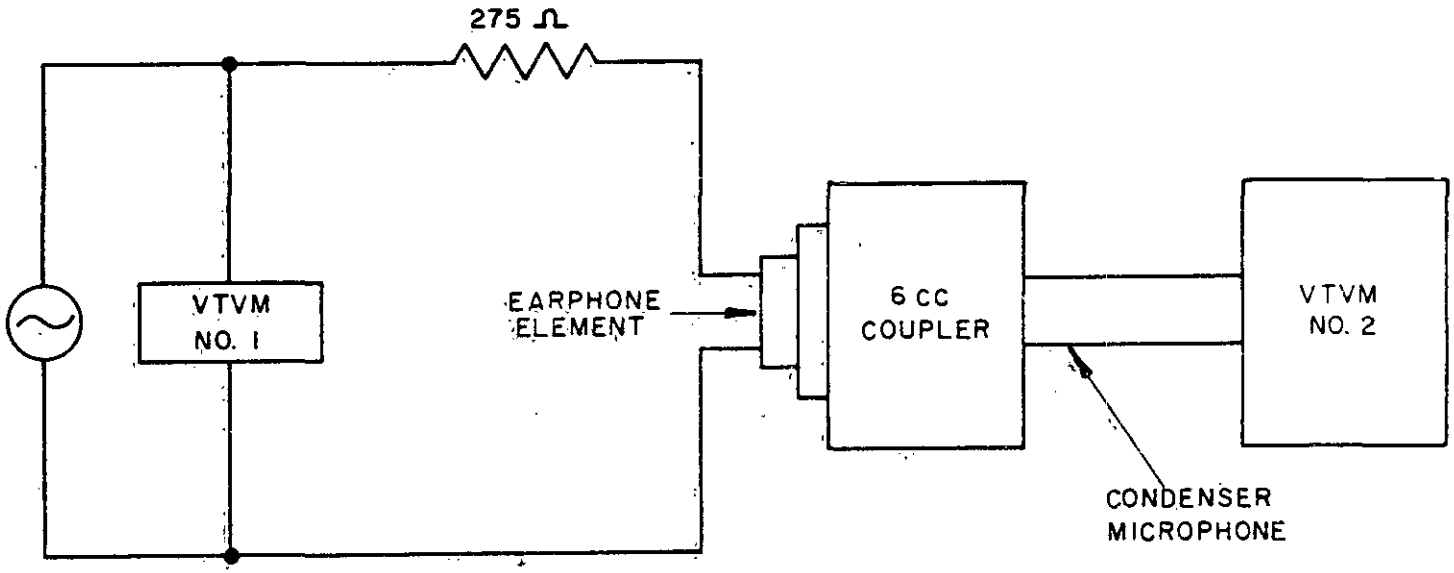


FIGURE 4. TEST CIRCUIT FOR RECEIVER ELEMENT FREQUENCY RESPONSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:24Z
Check the source to verify that this is the current version before use.

4.3.2.5.1 Response test. --Frequency response measurements shall be made every 100 cycles in the range from 300 to 1000 cps and at every 250 cycles in the range from 1000 to 4000 cps. Results shall be as specified in 3.5.2.3.

a. Microphone test circuits. --The frequency response of the microphone element shall be measured across a 20-ohm non-inductive load resistance which shall be in series with the microphone element and a 100-microfarad electrolytic condenser. The condenser shall be shunted by a series circuit consisting of a 24-volt d-c source, 250-ohm variable resistance, and a milliameter. With the microphone element short-circuited, adjust the variable resistance to obtain a d-c current of 85 milliamperes.

b. Voltmeter. --The voltage across the load resistance shall be measured with an electronic a-c voltmeter having an input impedance of not less than 0.5 megohm. A Ballantine Model 300, VTVM, or equal, having a flat frequency response from at least 100 to 10,000 cps, shall be used. It shall be capable of measuring voltage from 0.001 to 10 volts rms or more.

c. Sound source. --A Western Electric Company No. 555W Artificial Mouth, or equal, shall be used.

d. Audio oscillator. --A General Radio type 913B Beat Frequency Oscillator, or equal, having a wave form distortion of less than 2 percent, shall be used.

e. Test apparatus. --The test apparatus shall provide mountings for holding and rotating the sound source and microphone element in the following positions:

(1) The microphone element, assembled in its housing, shall be mounted coaxially with the sound source with a 1/4-inch air space between the extreme end of the sound source coupler and the cap of the microphone element housing.

(2) The test apparatus shall permit rotating the sound source and microphone element assembly through 180 degrees in a vertical plane perpendicular to the microphone element diaphram.

f. Sound pressure calibration. --A Western Electric 640AA Condenser Microphone, or equal, with its protective grid, shall be used for setting up a sound pressure of 28 dynes per square centimeter. The microphone shall be calibrated by the reciprocity method in accordance with "Calibration of Standard Pressure Microphones", ASA Standard Z24.4/164. The plane of the protective grid of the microphone shall

Source: https://assist.dla.mil -- Downloaded: 202640-20T10:24Z
Check the source to verify that this is the current version before use.

be axially located 1/4 inch from the sound source coupler. The electrical input to the sound source shall be adjusted to obtain the specified sound pressure in terms of dynes per square centimeter at each test frequency. The electrical output of the condenser microphone shall be measured either with a volume level indicator or an a-c electronic voltmeter.

g. Conditioning the microphone element prior to test.--After calibrating the sound source, replace the condenser microphone with the test microphone element assembled in a suitable housing and with its grid located as specified in 4.3.2.5.1e. It shall shake the microphone element vigorously in all directions before mounting it in the fixture. With the microphone diaphram in the vertical plane, rotate the microphone element about its axis through an approximately 270-degree arc and back to its original position two times at a regular uniform rate of approximately one complete cycle (270 degrees and back) in 2 seconds. Then rotate the test apparatus to the position in which the microphone element shall be tested. With the current adjusted as specified in 4.3.2.5.1a and flowing through the microphone element, wait approximately 3 seconds for current stabilization. Then apply an agitation sweep signal at an average sound pressure of 70 dynes per square centimeter and varying uniformly from 1000 to 3000 cps and back to 1000 cps every 2 seconds. At the conclusion of the third sweep, the audio oscillator shall be shut off in such a manner as not to destroy the spurious conditioning.

h. Response measurements.--After approximately 3 seconds delay turn on the test tone and, using a sound pressure of 28 dynes per square centimeter, take the response curve starting at 300 cps. Results shall be as specified in 3.5.2.3.

i. Positional characteristics.--The frequency response characteristics of the microphone element shall be measured for four microphone positions; with diaphram vertical, with diaphram at 45 degrees (face up), with diaphram face up, and diaphram face down. The microphone element shall be conditioned as specified in 4.3.2.5.1g prior to each test and then shall meet the requirements specified in 3.5.2.3 and 3.5.2.3.1.

4.3.2.5.2 Impedance test.--During the response test specified in 4.3.2.5.1h, the d-c voltage and d-c current of the microphone element shall be obtained simultaneously at 1000 cps when the microphone element is located in the vertical position. The impedance of the microphone element shall be as specified in 3.5.2.1 and shall be determined by the following formula:

$Z = V/I$

Z = Impedance of microphone element
V = d-c voltage across microphone element (at 1000 cps)
I = d-c current through microphone element (at 1000 cps)

Source: https://assist.dla.mil -- Downloaded: 202610-20T10:24Z
Check the source to verify that this is the current version before use.

4.3.2.5.3 Unagitated current test.--This test shall be performed in a place which shall be relatively free from noise and vibration. The microphone element, in its housing, shall be connected into a test circuit consisting of a 4-1/2-volt d-c source (of negligible impedance) in series with a suitable milliameter and a 20-ohm resistor. The source and the meter shall be shunted by a 100-microfarad electrolyte capacitor. The microphone element shall be rotated as specified in 4.3.2.5.1g. The circuit shall then be closed and 10 readings of current, at intervals of approximately 1 minute, shall be taken. The highest reading shall be considered as the maximum unagitated current and shall be as specified in 3.5.2.2.

4.3.2.5.4 Low voltage test.--The microphone element, assembled in its housing, shall be mounted as specified in 4.3.2.5.1e (vertical position) and connected as shown in figure 5. Having previously calibrated the sound source for 28 dynes per square centimeter as specified in 4.3.2.5.1f at 300, 500, 1000, 2000, 3000 and 4000 cps, condition the microphone element as specified in 4.3.2.5.1g. Turn on the test tone and, using a sound pressure of 28 dynes per square centimeter, take response readings at each of the above frequencies with circuit switch closed. This test shall be completed in 1 minute or less. The response of the microphone element shall meet the requirements specified in 3.5.2.4.

4.3.2.5.5 Thermal noise and resistance.--The test circuit shall be the same as that used for the response test specified in 4.3.2.5.1 with the current adjusted as specified in 4.3.2.5.1a. The a-c meter, used to measure the voltage drop in the load resistance caused by the thermal noise in the microphone element, shall possess a damping factor such that 0.2 second shall be required to produce full scale deflection upon application of a constant a-c voltage.

a. The microphone element shall be tested in a location sufficiently free from noise and vibration so that the microphone element output results only from disturbances generated within the microphone element.

b. The test shall consist of connecting the microphone element in the test circuit with the current flowing through the element. The microphone shall be rotated as specified in 4.3.2.5.1g and agitated for 10 seconds with approximately a 70-dyne per square centimeter sound pressure varying uniformly from 1000 to 3000 cps and back to 1000 cps every 2 seconds. Then with the agitation off, measure the a-c voltage across the load resistor created by thermal noise.

c. The highest a-c voltage generated across the load resistance during the period from 5 seconds after agitation until the end of 2 minutes shall be taken as the thermal noise.

d. The resistance for the test shall be computed from the maximum reading of a d-c voltmeter connected across the microphone element during the period from 5 seconds after agitation, as specified in 4.3.2.5.5b, until the end of the test. The current reading shall be taken simultaneously.

Source: https://assist.dla.mil -- Downloaded: 202610-20T10:24Z
Check the source to verify that this is the current version before use.

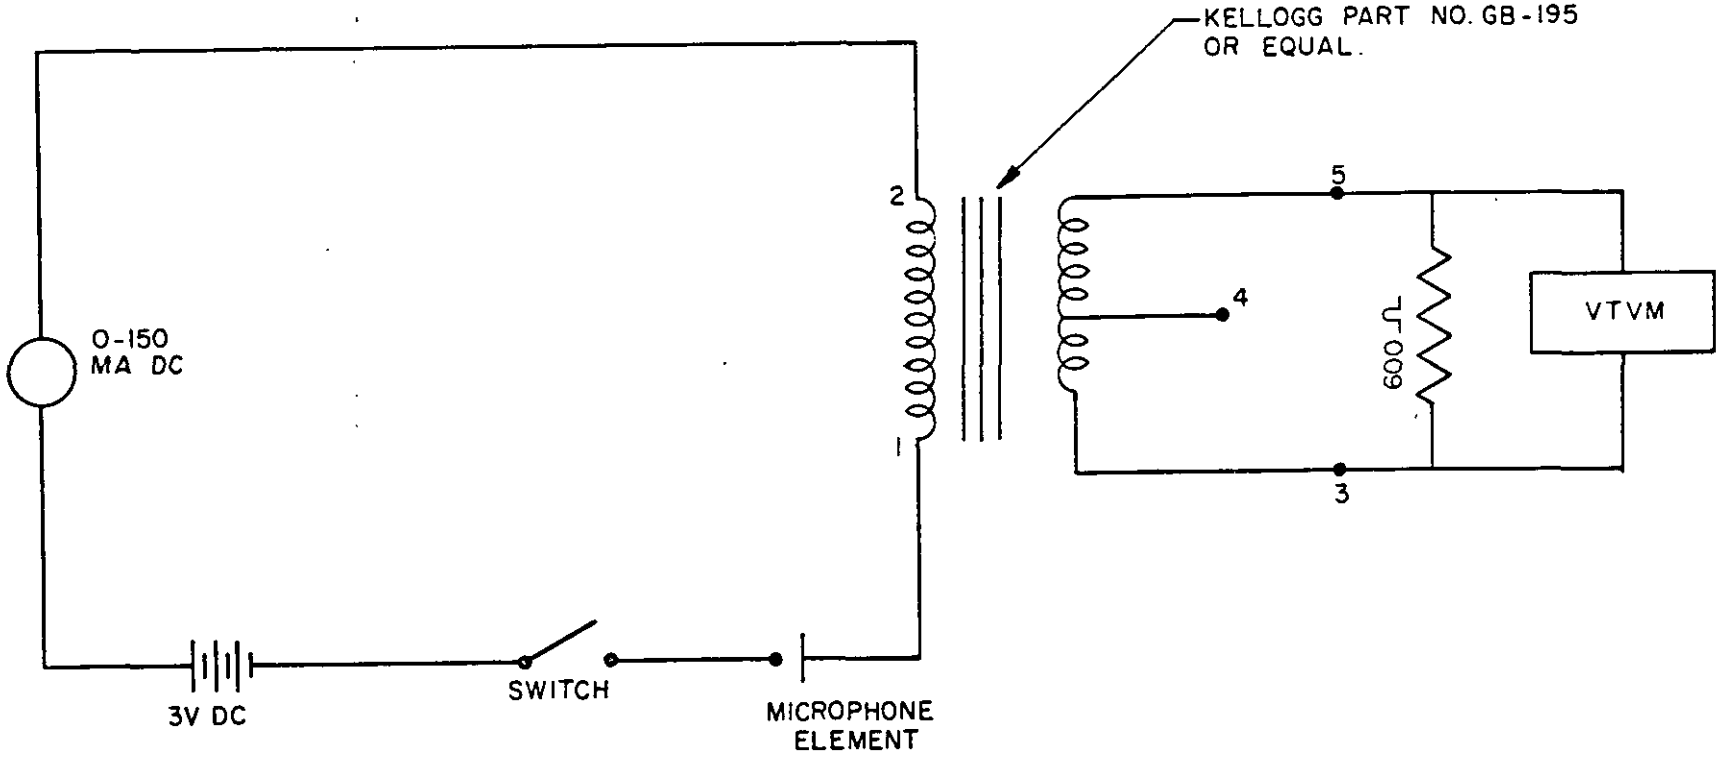


FIGURE 5. LOW VOLTAGE TEST CIRCUIT FOR MICROPHONE ELEMENT FREQUENCY RESPONSE.

Source: https://assist.dla.mil -- Downloaded: 20261[illegible]-20T10:24Z
Check the source to verify that this is the current version before use.

e. The following limits of thermal noise shall apply to the tests as specified in 4.3.2.5.5 on individual microphone elements at any angle of microphone-element diaphram relative to the vertical. An aged microphone shall be defined as having been subjected to the vibration test.

(1) Thermal noise (new microphone elements): 2.25×10^{-3} volts
(2) Thermal noise (aged microphone elements): 12.7×10^{-3} volts

f. The greatest resistance of a microphone element, obtained in this test, shall be not more than twice the greatest resistance of the same microphone element prior to the vibration test.

4.3.2.6 Switch, push-to-talk. --The switch shall be tested to determine compliance with 3.5.3.

4.4 Acceptance tests. --The acceptance test of the handset-headset and cord shall consist of the following individual and sampling tests:

4.4.1 Individual tests. -- Each handset-headset and cord shall be subjected to the following tests. In addition, each handset-headset and cord shall be subjected to any other test specified herein which the inspector considers necessary to determine compliance with the requirements of this specification.

4.4.1.1 Mechanical inspection test. --Each handset-headset and cord shall be given a thorough mechanical and visual inspection to determine that the quality of materials and workmanship is in compliance with the requirements of this specification. Particular attention shall be given to the following:

a. Completeness
b. Identification markings
c. Ease of operation of the switch
d. The fit of components in their respective positions
e. Finish
f. Workmanship
g. Solder joints
h. Wire connectors
i. Check of insulation
j. Check fit of threaded parts

4.4.1.2 Continuity test. --Each electrical component of the handset-headset and cord shall be given a continuity test to ascertain that it is wired and connected correctly and that good electrical contact is obtained.

4.4.1.3 Performance test. --The equipment shall be given a performance test to determine compliance with the requirements specified herein.

4.4.2 Sampling test. --One handset-headset shall be selected from each lot of 100 or fraction thereof on the order and subjected to the individual tests and the following tests:

Source: https://assist.dla.mil -- Downloaded: 202640-20T10:24Z
Check the source to verify that this is the current version before use.

a. Response test (see 4.3.2.4e and 4.3.2.5.1)
b. Impedance test (see 4.3.2.4a and 4.3.2.5.2)

5. PREPARATION FOR DELIVERY

5.1 General.--The packaging, packing and marking requirements specified herein apply only to direct purchases by, or direct shipments to the Government.

5.2 Preservation and packaging

5.2.1 Immediate use.--(For domestic shipment with immediate use at initial destination). The handset-headset and cord shall be preserved and packaged in accordance with Specification MIL-P-116, Method III.

5.2.2 Limited storage.--(For domestic shipment with maximum storage of 180 days). The handset-headset and cord shall be preserved and packaged as specified in 5.2.3.

5.2.3 Extended storage.--(For overseas shipment and domestic shipment with more than 180 days storage). The handset-headset and cord shall be preserved and packaged in accordance with Specification MIL-P-116, Method II. Packaging material, in direct contact with unprotected surfaces susceptible to damage by corrosion, shall meet the requirements of Specifications JAN-B-121, MIL-P-4185, MIL-A-148 and MIL-B-130, as applicable. Humidity indicators, in accordance with Standard MS20003, shall be used.

5.3 Packing

5.3.1 Immediate use.--(For domestic shipment with immediate use at initial destination). Packages which require overpacking for acceptance by the carrier, shall be packed in exterior type shipping containers in a manner that will assure safe transportation at the lowest rate to the point of delivery. Containers shall meet Consolidated Freight Classifications rules or regulations of other common carriers as applicable to the mode of transportation.

5.3.2 Limited storage.--(For domestic shipment with maximum storage of 180 days). Exterior containers shall be in accordance with Specifications PPP-B-601 (domestic type), NN-B-621, LLL-B-631, LLL-B-636 and JAN-P-103. When fiberboard containers are used, they shall meet the requirements of Specification LLL-B-631 and Specification LLL-B-636, as applicable.

5.3.3 Extended storage.--(For overseas shipment and domestic shipment with more than 180 days storage). Exterior containers shall be in accordance with Specifications PPP-B-601 (export type), JAN-P-106, or JAN-P-108. Plywood, if used, shall be in accordance with Specification NN-P-515, Type II, Class 1. Sealed caseliners shall be in accordance with Specification MIL-L-10547.

5.4 Physical protection.--Cushioning, blocking, bracing, and bolting, as required, shall be in accordance with Specification JAN-P-100 except that for domestic shipments, waterproofing requirements for cushioning materials and containers shall be waived.

Source: https://assist.dla.mil -- Downloaded: 202640-20T10:24Z
Check the source to verify that this is the current version before use.

5.5 Marking.--Interior and exterior containers shall be marked in accordance with Standard MIL-STD-129.

6. NOTES

6.1 Intended use.--Handset-Headset H-108( )/U is intended for use to provide facilities for operated use at switchboards, desks, and private branch exchange (PBX) positions. Cord CX-1245( )/U (7 ft 6 in) is intended for use to connect the operator's handset-headset to the telephone equipment.

6.2 Ordering data.--Procurement documents should specify the following:

a. Title, number, and date of this specification

b. The level of preservation, packaging, and packing required (see 5.2 and 5.3)

c. Whether the preproduction test will be conducted by the procuring activity or by the contractor (see 4.3.1)

d. Conditions under which Government-loaned property will be made available to the contractor (see 3.8)

6.3 Drawings.--Upon the specific request of the contractor to the procuring activity, a copy of the applicable drawings of the equipment may be furnished, if available, for informational purposes only.

6.4 No production Handset-Headset H-108( )/U and Cord CX-1245( )/U (7 ft 6 in) should be fabricated or accepted prior to approval of the preproduction samples. Production should not start until all component parts are approved by the procuring activity.

Patent notice: When Government drawings, specification, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 202640-20T10:24Z
Check the source to verify that this is the current version before use.