|INCH-POUND|

MIL-S-26753D
6 August 1990
SUPERSEDING
MIL-S-26753C
10 January 1983

MILITARY SPECIFICATION

SANDER, DISK AND SPINDLE, WOODWORKING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type and size combination disk and spindle sander with a 30-inch diameter disk and a single spindle to support sanding drums 9 inches in length, and 2 through 4 inches in diameter, with equipment and accessories specified herein. The requirements set forth in this specification and the completed ordering data (see paragraph 6.2), establishes the Government's minimum requirements for each procurement.

|Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSM, 2163 Airways Boulevard, Memphis, Tennessee 38114-5051, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.|

AMSC N/A FSC 3220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-M-18058 - Machinery, Metal and Woodworking, Packaging of.

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards for Federal Services.

MILITARY

MIL-STD-461 - Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interferences.

MIL-STD-462 - Electromagnetic Interference Characteristics, Measurement of.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

CODE OF FEDERAL REGULATIONS (CFR)

U. S. DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR 1910 - Occupational Safety and Health Standards.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402-0001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI O1.1 - Safety Requirements for Woodworking Machinery.

ANSI B5.10 - Machine Tapers. *(DOD adopted)*

(Application for copies should be addressed to the American National Standards Institute, ATTN: Sales Department, 1430 Broadway, New York, NY 10018-3363.)

NATIONAL ELECTRICAL MANUFACTURERS' ASSOCIATION (NEMA)

NEMA MG 1 - Motors and Generators. (DOD adopted)

(Application for copies should be addressed to the National Electrical Manufacturers' Association, 2101 L Street, N.W., Washington, DC 20037-1580.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 79 - Electrical Standard for Industrial Machinery. (DOD adopted)

(Application for copies should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269-9101.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

3.1 First article. When specified (see 6.2), one complete sander shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.2 Design. The sanders shall be new (not a prototype) and one of the manufacturer's current production models capable of operations in accordance with the requirements herein. The sanders shall include all components, parts, and features necessary to meet the performance requirements specified herein. All parts subject to wear, breakage, or distortion shall be readily accessible for adjustment, replacement, or repair.

3.2.1 Measuring and indicating device calibrations. Measuring and indicating devices shall be graduated in inch-pound (see 6.5.1), metric (see 6.5.2), or dual (inch-pound and metric) units as specified by the procuring activity (see 6.2). Regardless of the measurement system used, all measuring and indicating devices on the sanders shall be graduated in the same system.

3.2.1.1 Dials. All dials used to indicate machine axes position or tool movement shall be graduated in increments not larger than 0.001 inch. Dial and handwheel circumferences shall be permanently and legibly engraved or etched on a nonglare background with graduations that can be read from the operator's normal position. All feed dials shall have independent zero adjustments and shall be calibrated in such a manner that the last dial graduation progresses into and is continuous with the first dial graduation as the dial is rotated through the zero position.

3.2.2 Reclaimed materials. The machine may contain reclaimed materials to the maximum extent possible provided such materials will not jeopardize the intended use, performance, or design life of the machine. Reclaimed materials shall have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used, rebuilt, or remanufactured end products are allowed under this specification.

3.2.3 Energy efficiency. The sanders and its components that directly consume energy in normal operation shall be designed and constructed for energy efficiency in accordance with the developments available within the industry.

3.2.4 Controls. All mechanical, hydraulic, electrical and pneumatic operating controls shall be located convenient to the operator's work station(s).

3.2.5 Safety and health requirements. All parts, components, machinesisms, and assemblies furnished on the sanders, whether or not specifically required herein, shall conform to all requirements of OSHA 29 CFR 1910 and ANSI O1.1. If a conflict arises between 29 CFR 1910 and ANSI O1.1, 29 CFR 1910 shall apply. Additional safety and health requirements shall be as specified (see 6.2). Covers, guards, or other safety devices normally furnished as standard on the manufacturer's commercial disk sanders supplied to the commercial market shall be provided for the point-of-operation and all other parts of the sanders that present safety hazards. If point-of-operation guarding is influenced by workpiece size and configuration, the procuring

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

activity shall provide part design data to the supplier of the machine (see 6.2). The supplier of the machine shall provide the special guarding which shall meet OSHA 29 CFR 1910.

3.2.6 Mercury restriction. The sanders shall not contain mercury or mercury compounds nor be exposed to free mercury during manufacture.

3.2.7 Asbestos restriction. Asbestos and materials containing asbestos shall not be used on or in the disk sanders.

3.2.8 Environmental protection. During the manufacture, operation, service, transportation, or storage of the machine and its components, materials hazardous to the ecological system as prohibited by applicable Federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

3.2.9 Lubrication. Means shall be provided to ensure adequate lubrication for all moving parts. Recirculating lubrication systems shall include a cleanable or replaceable filter. Means for determining oil level in each reservoir shall be by an oil level sight gauge, a low oil level warning light, or similar device and shall be in clear view of the operator's normal work station. An automatic lubrication system shall be provided for all ways and axis screws. Each lubricant reservoir shall have at least a 24-hour capacity and means for determining fluid level. All oil holes, grease fittings, and filler caps shall be readily accessible.

3.2.10 Interchangeability. All parts of the end item shall be manufactured to definite standards and tolerances that will provide for the interchangeability of respective parts between end items of the same model. All replacement parts shall be interchangeable with their respective original parts, and fit/function with mating components.

3.3 Construction. The disk sanders shall be constructed of parts which are new, without defects, and free of repairs. The structure shall withstand all forces encountered during operation of the disk sanders to its maximum rating and capacity without permanent distortion or failure.

3.3.1 Castings and forgings. All castings and forgings shall be free of defects, scale, and mismatching. No processes such as welding, peening, plugging, or filling with solder or paste shall be used for reclaiming any defective part. Such processes may be used only for enhancing surface finish and appearance.

3.3.2 Fastening devices. All fasteners shall be installed to prevent change of tightness. Fastening devices subject to removal or adjustment shall not be permanently installed.

3.3.3 Surfaces. All surfaces shall be clean and free of harmful or extraneous materials. All edges shall be either rounded or beveled unless sharpness is required to perform a necessary function. Except as otherwise specified herein, the condition and finish of all surfaces shall be in accordance with the manufacturer's commercial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

3.3.4 Welding, brazing, or soldering. Welding, brazing, or soldering shall be employed only where specified in the original design. Any material used for such operations shall be thoroughly removed from the part(s) upon completion of the operations.

3.3.5 Painting. Unless otherwise specified (see 6.2), the paint color and application shall be in accordance with the manufacturer's commercial practice.

3.3.6 Threads. All threaded parts used on the disk sanders and its related attachments and accessories shall conform to FED-STD-H28 and the applicable "Detailed Standard" section referenced therein.

3.3.7 Gears. All gears shall be constructed from a material suitable for the intended purpose. All gears shall be machined and heat treated by a process that will impart the hardness, surface finish, and toughness that will enable the gear train to transmit full rated torque of the drive motor without gear damage, failure, or premature deterioration and wear.

3.3.8 Electromagnetic interference control. When specified (see 6.2), equipment furnished under this specification shall comply with MIL-STD-461. The equipment and subsystem(s) class and the emission and susceptibility requirements shall be as specified.

3.4 Components.

3.4.1 Frame. The frame shall support all of the machine components specified herein. The frame shall have sufficient strength and rigidity to enable the sander to perform at its maximum capacity without permanent deformation. The frame shall have access openings, with covers or hinged doors, to facilitate maintenance of all enclosed components requiring adjustment, lubrication and maintenance. Means shall be provided to securely fasten the sander to the floor or foundation.

3.4.2 Disk. The disk shall be of carbon steel plate with a surface for the attachment of an abrasive disk with adhesive. The disk shall be driven either by the motor shaft or by pulley and V-belt drive. A flanged hub installed on the driven shaft shall facilitate disk installation and removal. Spindle speed shall not exceed 1250 RPM.

3.4.2.1 Disk table. The disk table shall be a one-piece iron alloy or semi-steel casting. The table top surface shall be flat within 0.005 inch.

3.4.2.2 Disk table adjustments. The table shall be mounted to permit tilting of the table as specified in table II, the vertical adjustment shall comply with the requirements specified in table I and shall be controlled by an adjustment screw and hand crank or hand wheel located in a position convenient to the operator. The transverse adjustment, when required (see 6.2) shall be of the hand wheel and screw type, operable at the operation

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

sides of the work table. If the vertical adjustment range will allow the worktable to be lowered below the bottom edge of the disk to allow disk removal, the transverse adjustment may be omitted.

3.4.2.3 Disk guard. A metal guard shall be mounted on the sander covering the back side and top edge of the outside periphery of the disk.

3.4.2.4 Dust chute. A dust chute shall encase the lower part of the sanding disk and shall be constructed to connect to an exhaust duct.

3.4.3 Spindle sander.

3.4.3.1 Spindle unit. The spindle unit shall consist of combination spindle drive and oscillating mechanism, a dynamically balanced spindle with spacing collars, and a hex nut or a capscrew with a washer, to install and allow removal of different size sanding drums with diameters conforming to table I.

3.4.3.2 Oscillating unit. The oscillating unit shall be constructed with a leakproof, internally lubricated drive mechanism. The oscillating unit shall be driven either directly by the motor or through a gear train. The oscillating unit shall drive the spindle by means of an output shaft throughout the oscillating distance specified in table I.

3.4.3.3 Clutch. When a single motor is used to power both the disk and the spindle, mechanical means shall provide engagement and disengagement of power to the oscillating unit.

3.4.3.4 Spindle. The spindle shall be constructed of high carbon steel to accommodate spindle drums 9 inches long. The spindle shall be either threaded or shall have a self-holding taper conforming to ANSI B5.10.

3.4.3.5 Spindle drum. Not less than three different diameter spindle drums constructed of rubber shall be furnished with the sander. The three drums shall be of the diameter and length specified in table I and shall be constructed to uniformly support an abrasive sleeve, when the drum is tightened to the spindle.

3.4.3.6 Spindle table. The spindle table shall be one piece iron alloy or semi-steel casting with dimensions conforming to table I. The table top surface and edges shall be flat to 0.005 inch.

3.4.3.7 Spindle clearance rings. A clearance ring for each diameter of spindle drum furnished shall interchangeably fit an opening in the spindle table to maintain spindle operating clearance.

3.4.4 Table tilt mechanism. The tilt mechanism shall provide a table tilting range of not less than the requirements of table II. A scale graduated in one degree increments, on the front of the sander, shall display the degrees of table tilt. Each 5 degrees along the scale shall be identified

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

progressively by corresponding numerals. The tilting mechanism shall be manually controlled by a hand wheel or crank and shall include a securing device.

3.4.6 Electrical requirements. The machine shall be wired to conform to NFPA 79. Each machine shall be wired to draw all of its electrical power from a single circuit. Unless otherwise specified (see 6.2), each machine shall be designed to operate on 230/460-volt, 3-phase, 60-Hertz (Hz) input power. Unless otherwise specified (see 6.2), the disk sanders shall be initially wired for operation on 460 volts.

3.4.6.1 Motors. Motors shall be rated for 60 minutes duty cycle and shall have ball or roller bearings of the sealed and permanently lubricated type. Unless otherwise specified (see 6.2), alternating current (AC) motors shall be designed to operate on 60-Hz. The motor enclosure shall meet the requirements for a dripproof, totally enclosed fan-cooled) enclosure. All motors shall conform to the requirements of NEMA MG-1. Either a 5 hp motor shall drive both the disk and the spindle or, a 5 hp motor shall drive the disk and a 3/4 hp motor shall separately drive the spindle.

3.4.6.2 Worklight. When specified (see 6.2), a worklight shall be provided. The light shall have a protective shield, an on-off switch, and shall be adjustable to reflect maximum light on the work area. If a built-in lighting system is provided, the adjustable light described above shall not be required.

3.5 Size and capacity. Unless otherwise specified (see 6.2), the size and capacity of the disk sander shall meet the requirements of table I for the machine specified. Machine capacity shall be not less than the stated requirements of the size ordered. When a range is given, the required performance shall be from the stated minimum or less to the stated maximum or greater.

3.5.1 Physical size limitations. When specified (see 6.2), the physical size of the machine shall not exceed the height, width, and length restrictions specified by the procuring activity to ensure the machine will fit in its future operating location.

3.6 Alignment tolerances. Each disk sander shall meet the alignment tolerances specified in table II.

3.7 Standard equipment. All standard equipment normally provided with the manufacturer's commercial machine shall be furnished.

3.8 Optional equipment. Optional equipment shall be furnished as specified and fully described (see 6.2). The optional equipment provided shall be functional without requiring modification of the equipment or machine.

3.9 Repair parts. Required repair parts shall be furnished as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

3.10 Marking on instruments, control panels, charts, and plates. All words on instruments, control panels, charts, and plates shall be in the English language. Characters shall be permanently marked in boldface on a contrasting background. All plates shall be corrosion resistant.

3.10.1 Lubrication plate. When specified (see 6.2), a lubrication plate shall be attached to each machine. Unless otherwise specified (see 6.2), the information provided on the plate shall be as listed below.

Points of lubricant application
Servicing interval
Type of lubricant
Federal or military specification for each lubricant (if applicable)

3.10.2 Nameplate. A nameplate shall be securely attached to each machine. Unless otherwise specified (see 6.2), the nameplate shall contain the information listed below.

Nomenclature
Manufacturer's name
Manufacturer's model designation
Manufacturer's serial number
Power input (volts, total amps, phase, frequency)
Amp rating of largest motor
Short circuit/over-current protection rating
Contract number or order number
National Stock Number or Plant Equipment Code
Date of manufacture

3.11 Workmanship. Workmanship of the disk sander and its accessories shall meet all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submissions of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be performed in accordance with the test conditions specified in 4.7.1.

4.4 First article inspection. When a first article inspection is required, it shall be applied to the first article submitted in accordance with 3.1. Unless otherwise specified (see 6.2), first article inspection shall consist of the examination in 4.6 and all tests in 4.7. The machine shall pass the examination and all tests to be accepted.

4.5 Quality conformance inspection. Quality conformance inspection shall be applied to each disk sander prior to being offered for acceptance under the contract. Unless otherwise specified (see 6.2), quality conformance inspection shall consist of the examination in 4.6, the tests in 4.7, and the inspection in 4.4. The machine shall pass the examination, all tests, and the inspection to be accepted.

4.6 Examination. Each disk sander shall be examined to determine compliance with all requirements of this specification.

4.7 Tests.

4.7.1 Test conditions. All tests shall be performed in an indoor facility with ambient conditions of 41° to 104° Fahrenheit and 20 to 95 percent relative humidity.

4.7.2 Operational test. Each disk sander shall be operated at no load for not less than 30 minutes. Proper operation of all controls, motors, adjusting mechanisms, and accessories shall be verified during the trial period.

4.7.3 Alignment tolerance test. Each machine shall be tested to determine compliance with the alignment tolerance requirements of 3.6. The alignment tolerance test shall be performed prior to and subsequent to the performance test(s) given in 4.7.4. Any machine adjustments required to comply with 3.6 during or after the performance test shall be cause for rejection.

4.7.4 Performance tests. Performance test shall be in accordance with table II. All performance tests shall be completed without making any

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

adjustments to or performing any maintenance on the machine. Each sander shall be capable of performing the following tests.

4.7.4.1 Operational accuracy test. The sander shall sand a sample block of wood for each table tilt setting specified in table II. The sanded angle resulting from each table tilt setting shall conform to the degree of accuracy specified in table II.

4.7.4.2 Disk operating speed test. The operation speed of the disk shall be determined by means of a stroboscope or tachometer. Operation of the disk shall result in a stroboscope or tachometer reading equivalent to not less than 1,050 RPM and not more than 1,250 RPM.

4.7.4.3 Spindle operating speed test. The operating speed of the spindle shall be determined by means of a stroboscope or shall be calculated from the rated motor speed and, if applicable, the drive gear ratio. Stroboscopic determination or speed input calculation, as specified above, shall result in a spindle operating speed of not less than 1,750 RPM.

4.7.4.4 Spindle oscillation rate test. The number of spindle oscillations shall be tested for at least two 1-minute time periods, manually, with a stopwatch. Operation of the spindle shall result in a cycle count of not less than 50 oscillations per minute.

4.7.4.5 Spindle stroke length test. The spindle drive shaft shall be turned manually to operate the spindle through a complete stroke. The length of the stroke shall measure not less than 1 inch.

4.7.4.6 Disk table vertical adjustment test. The disk table, without being tilted, shall be raised and lowered to the maximum limits. The vertically adjustable distance shall be not less than 8 inches. The upper limit shall be above the center of the disk and lower limit shall be below the center of the disk.

4.7.4.7 Flatness test of table top. Flatness of the table top shall be determined by placing a straightedge in at least two directions, at right angles to one another, on each table top, then checking for flatness with feeler gages. The table top shall be flat within 0.005 inch.

4.7.5 Electromagnetic interference control test. Equipment requiring electromagnetic interference control shall be tested for compliance with 3.3.8 using the procedures given in MIL-STD-462.

4.8 Packaging inspection. Packaging of each item shall be inspected to determine compliance with the requirements of section 5.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-18058.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The disk sanders covered by this specification are intended for use in woodworking shops where sander disk finishing and polishing operations are required.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Type and size required (see 1.2).

c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1, 2.1.2 and 2.2).

d. First article, if required (see 3.1).

e. System of units for measuring and indicating devices (see 3.2.1).

f. Additional safety and health requirements, if required (see 3.2.5).

g. Specify configuration of additional point-of-operation guarding, if required (see 3.2.5).

h. Painting, if different (see 3.3.5).

i. If electromagnetic interference control is required, specify the equipment and subsystem class and the emission and susceptibility required (see 3.3.8).

j. Disk table adjustment if different (see 3.4.2.2).

k. Electrical requirements, if different (see 3.4.6).

l. Initial voltage, if different (see 3.4.6).

m. Motors, if different (see 3.4.6.1).

n. Worklight, if required (see 3.4.6.2).

o. Size and capacity, if different (see 3.5).

p. Specify physical size limitation, if required (see 3.5.1).

q. Specify and fully describe optional equipment, if required (see 3.8).

r. Specify applicable repair parts, if required (see 3.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

s. Lubrication plate, if required (see 3.10.1).

t. Information to be provided on lubrication plate, if different (see 3.10.1).

u. Nameplate, if different (see 3.10.2).

v. Inspection conditions, if different (see 4.3).

w. First article inspection, if different (see 4.4).

x. Quality conformance inspection, if different (see 4.5).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DIDs) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DIDs are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph Tailoring	DID Number	DID Title	Suggested
3.13	DI-TMSS-80527	Commercial Off-The-Shelf (COTS) Manuals.	Require all data be in the English language.
3.13	DI-TMSS-80528	Supplemental Data for Commercial Off-The-Shelf (COTS) Manuals.	Require all data be in the English language.

The above DIDs were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DIDs are cited on the DD Form 1423.

6.3.1 Technical data. It should be specified in the "Remarks" section of the DD Form 1423 that all technical data ordered shall be written in the English language.

6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a first article sample, a first production item, or a standard production item from the contractor's current inventory and the number of items to be tested as specified in 4.4. The contracting officer should include specific instructions in acquisition documents regarding

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Definitions.

6.5.1 Inch-pound units. Inch-pound units are a system of measures based on the yard and pound commonly used in the United States of America and defined by the National Institute of Standards and Technology. Inch-pound units having the same names in other countries may differ in magnitude.

6.5.2 Metric units. Metric units are a system of basic measures defined by the International System of Units based on "Le Systeme International D'Unites (SI)," of the International Bureau of Weights and Measures. These units are described in ASTME 380 and IEEE 268.

6.6 Measurement system. In this specification, all measurements, dimensions, sizes, and capacities are given in inch-pound units. These measurements may be converted to metric units through the use of the conversion factors and methods specified in FED-STD-376.

6.7 Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.8 Safety and health requirements. OSHA 29 CFR 1910 limits only the total hazard level (noise, radiation, electromagnetic emissions, noxious vapors, air contaminants, and heat) of the environment in which a machine will operate. It does not limit the hazard level of individual machines in an operating environment. The procuring activity should analyze the existing hazard level in the proposed operating environment and specify additional requirements necessary to integrate this new machine into its future environment.


6.9 Training. Training required by the procuring activity should be provided as specified in the contract.

6.10 Warranty. Warranty requirements should be as specified by the procuring activity in the contract.

6.11 Inspection location. The contractor should identify in his response to the solicitation the location where inspection and tests are to be performed.

6.12 Part or Identifying Number (PIN). The PIN to be used for machines acquired to this specification are created as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

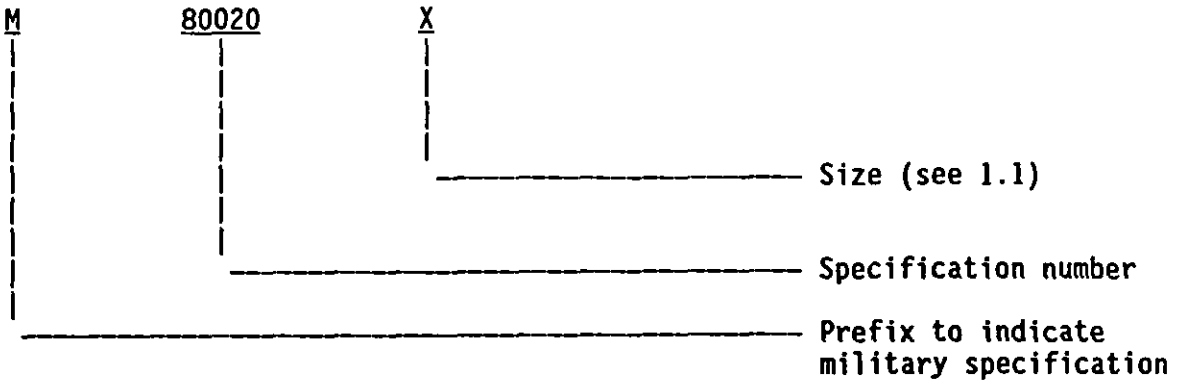

6.14 Subject term (keyword) listing.

Sanding
Finishing
Polishing

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

TABLE I. Sander characteristics.

Characteristics	Capacities
Disk:	
Outside diameter, inches	30
Thickness, inches	5/8
RPM	1,050
Disk Table:	
Size, inches	15 x 38
Vertical adjustment, inches	8
Transverse adjustment, when required, inches	3
Spindle:	
Oscillating distance, inches	1
Strokes, per minute (oscillating)	50
Diameter of spindle drums, inches	2-3-4
Length of spindle drums, inches	9
RPM	1,725
Spindle Table:	
Size, inches	24 x 24

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

TABLE II. Table tilt requirements.

Table	Table Tilt Setting	Resulting Sanded Angle (degrees)
Disk Table	0 degree (no tilt)	90+/- 1/2
	10 degrees toward the disk (up)	80+/- 1/2
	22 degrees away from the disk (down)	112+/- 1/2
	45 degrees away from the disk (down)	135+/- 1/2
Spindle Table	0 degrees (no tilt)	90+/- 1/2
	10 degrees toward the frame (up)	80+/- 1/2
	22 degrees away from the frame (up)	112+/- 1/2
	45 degrees away from the frame (down)	135+/- 1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AL
Navy - SH
Air Force - 99

Review Activities:
Air Force - 84
DLA - GS

User Activities:
Army - AV, CE
Navy - MC

Preparing Activity:
DLA - IP

Project (3220-0163)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-S-26753D	900806

3. DOCUMENT TITLE
Sander, Disk and Spindle, Woodworking

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Industrial Plant Equipment Center ATTN: DIPEC-SSM	(1) Commercial 901-775-6257	(2) AUTOVON 683-6257
c. ADDRESS (Include Zip Code) 2163 Airways Blvd. Memphis, TN 38114-5051	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:11Z
Check the source to verify that this is the current version before use.