INCH-POUND


MIL-DTL-3943/55E
30 August 2007
SUPERSEDING
MIL-DTL-3943/55D
1 May 1997

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE AWARD, DEFENSE CONTRACT AUDIT AGENCY

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

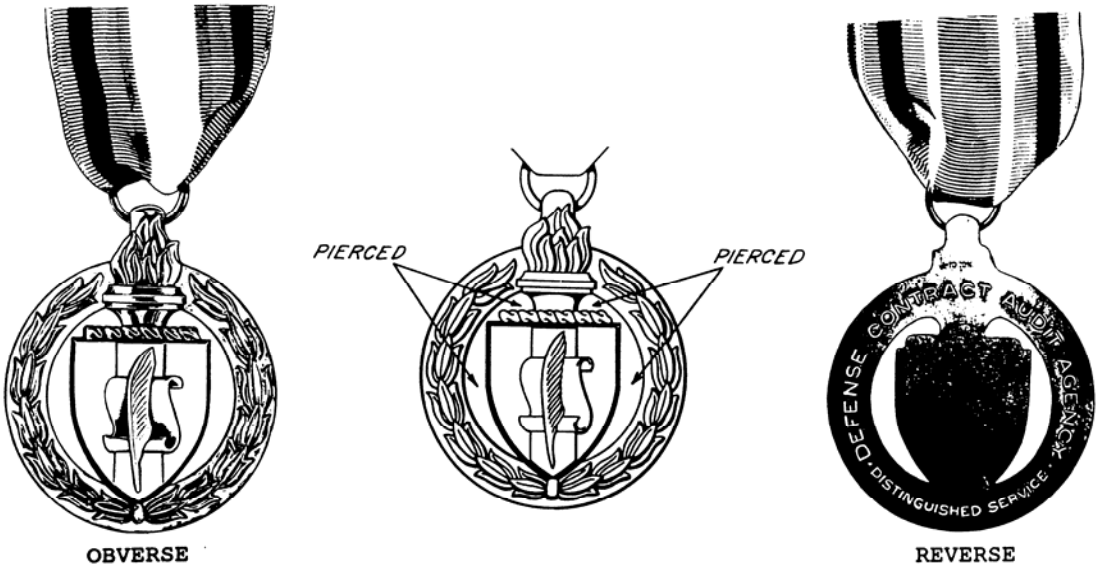

OBVERSE REVERSE

MATERIAL: Red Brass

FINISH: Gold Plated, Rose Gold Plated with Polished Highlights on the Wreath and Flame and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 20.

DIMENSIONS:

HEIGHT (including lug): 2 inches (REF)
DIAMETER: 1-21/32 inches (REF)
THICKNESS (at center): 0.225 inch $\pm$ 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:09Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

4. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/159.

5. The lapel button shall conform to MIL-DTL-11484/80.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH
(Project No. 8455-2007-135)

Review activities:
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:09Z
Check the source to verify that this is the current version before use.