INCH-POUND


MIL-DTL-3943/56F
12 July 2016
SUPERSEDING
MIL-DTL-3943/56E
30 August 2007

DETAIL SPECIFICATION SHEET

DECORATION, MERITORIOUS SERVICE AWARD, DEFENSE CONTRACT AUDIT AGENCY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

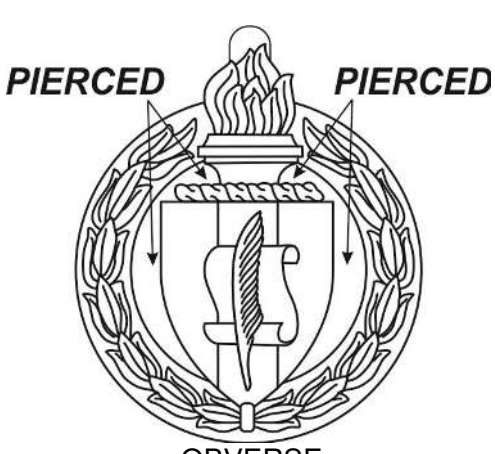

OBVERSE



REVERSE

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Nickel Plated, Silver Plated, Oxidized, Buffed Relieved and shall match The Institute of Heraldry Metal Finish Chip Number 15.

DIMENSIONS:
HEIGHT (Including lug): 2 inches (REF)
DIAMETER: 1-21/32 inches (REF)
THICKNESS (At center): 0.225 inch $\pm$ 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/160.

4. The specification for the lapel button is MIL-DTL-11484/203.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2016-669)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.