INCH-POUND


MIL-DTL-3943/57G
1 October 2007
SUPERSEDING
MIL-DTL-3943/57F
11 May 1999

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, NASA

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

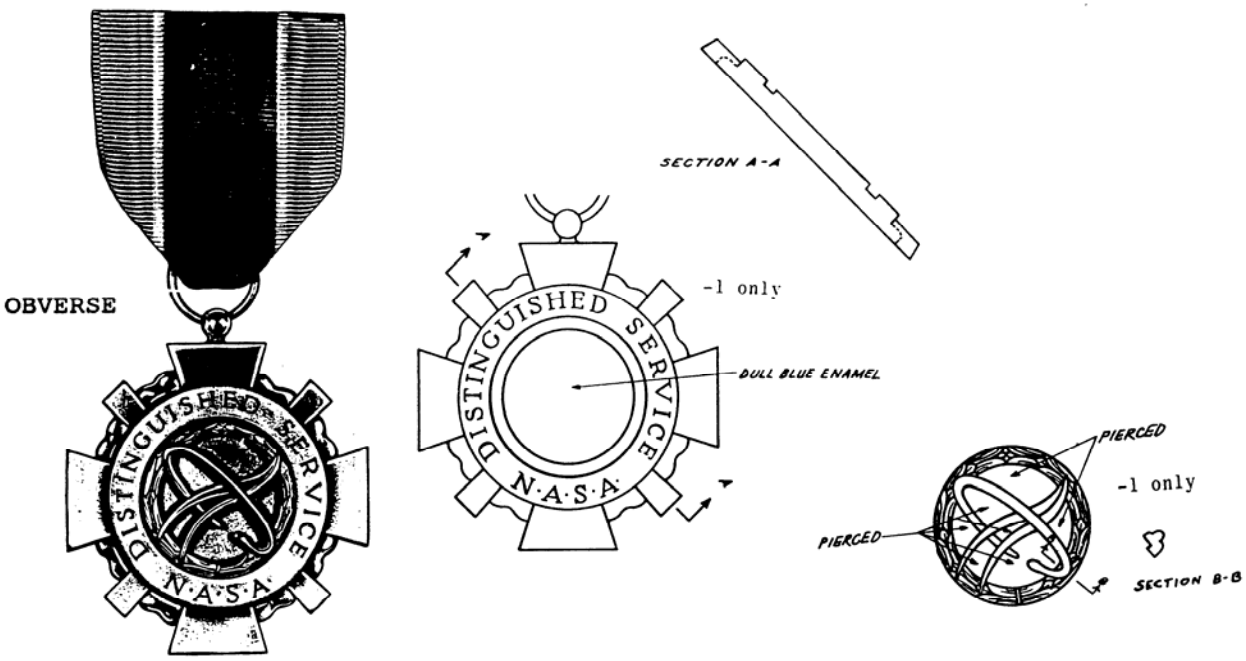

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:

-1: Gilding Metal
-2: Red Brass

FINISH:

-1: Hard Enameled, Gold Plated, Rose Gold Plated, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.

-2: Soft Enameled, Gold Plated, Rose Gold Plated, Polished Highlights and shall match TIOH Metal Finish Chip Number 20.

DIMENSIONS:

PENDANT:
DIAMETER:
-1: 1-11/64 inches (REF)
-2: 13/16 inch (REF)
THICKNESS (at edge):
-1: 0.095 inch ± 0.010 inch
-2: 0.055 inch ± 0.010 inch
DEVICE:
DIAMETER:
-1: 13/16 inch (REF)
-2: N/A (See Note 6)
THICKNESS (overall):
-1: 0.085 inch ± 0.010 inch
-2: N/A (See Note 6)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Reverse to be flat, plain and suitable for engraving.

3. Enamel color shall be blue as indicated. The enamel color shall conform to TIOH Hard Enamel Color Chip Number 30 with a dull finish.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When hard enamel is used, the material requirement shall be gilding metal. When epoxy is used, the material requirement shall be either red brass or gilding metal.

5. The wreath for Dash -1 shall be superimposed after enameling using soft solder.

6. Dash No. -2 shall be made in one piece.

7. Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XV, Style 1 with a Class 1 or 1A pad.

8. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/53.

9. The lapel button shall conform to MIL-DTL-11484/74.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH
(Project No. 8455-2007-192)

Review activities:
DLA - CT

Civil Agency Coordinating Activities:
NASA - NA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.