NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/57J
22 June 2021
SUPERSEDING
MIL-DTL-3943/57H
29 August 2016

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, NASA

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

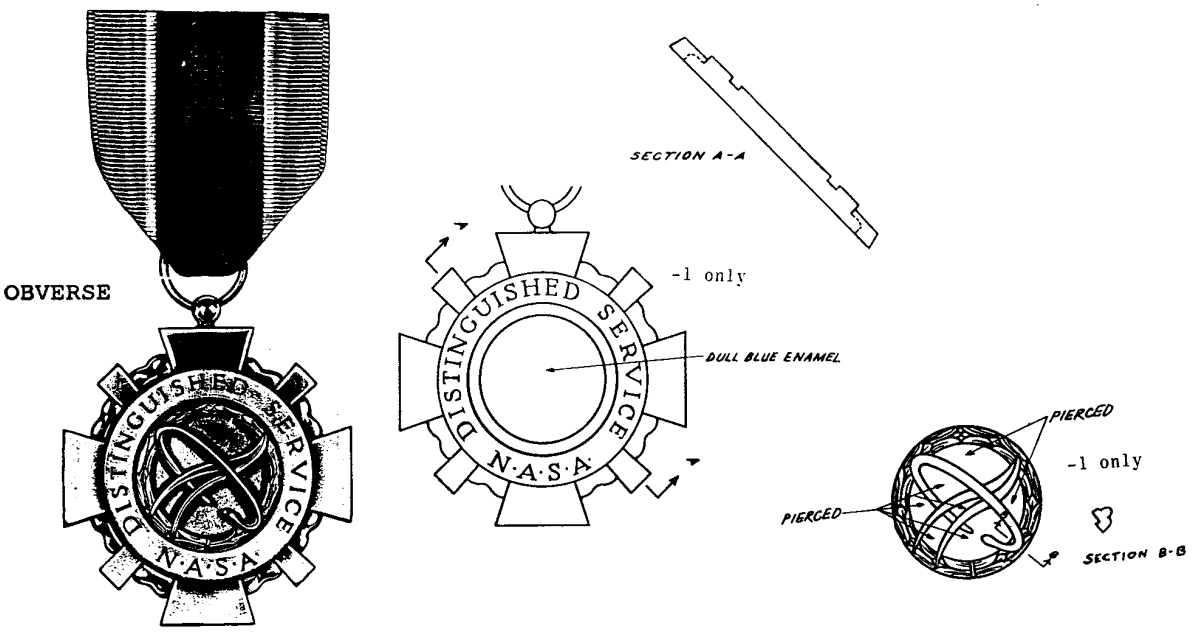

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:
-1: Gilding Metal 95/5 (UNS Alloy No. C-210)
-2: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1: Epoxy resin, 24K Gold Plated, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.

-2: Epoxy resin, 24K Gold Plated, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
PENDANT:
DIAMETER:
-1: 1-11/64 inches (REF)
-2: 13/16 inch (REF)
THICKNESS (At edge):
-1: 0.095 inch ± 0.010 inch
-2: 0.055 inch ± 0.010 inch
DEVICE:
DIAMETER:
-1: 13/16 inch (REF)
-2: N/A (See Note 4)
THICKNESS (Overall):
-1: 0.085 inch ± 0.010 inch
-2: N/A (See Note 4)

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type XV, Style 1 with a Class 1 or 1A pad.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Blue	#30

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Reverse to be flat, plain and suitable for engraving.

3. The wreath for -1 shall be superimposed after enameling using soft solder.

4. For -2 shall be made in one piece.

5. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/53.

6. The specification slash sheet for the lapel button is MIL-DTL-11484/74.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-559)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.