NOT MEASUREMENT SENSITIVE


MIL-DTL-3943/57K(IH)
27 May 2026
SUPERSEDING
MIL-DTL-3943/57J(IH)
22 June 2021

DETAIL SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, NASA

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

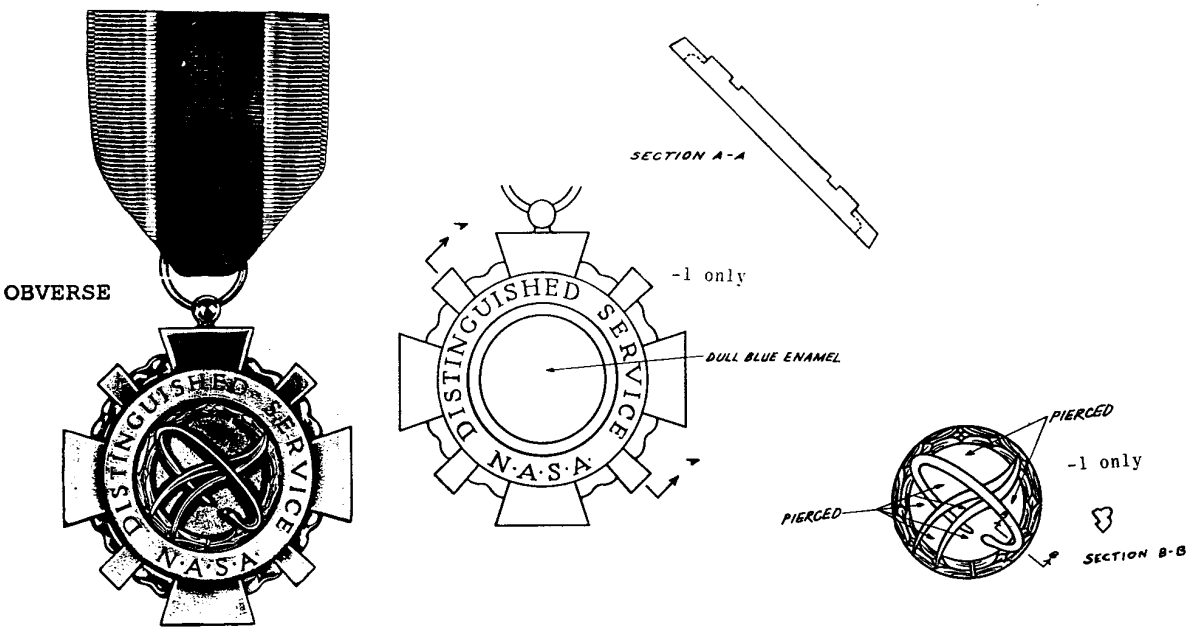

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:
-1: Gilding Metal 95/5 (UNS Alloy No. C-210)
-2: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1: Epoxy resin, 24K Gold Plated, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.

-2: Epoxy resin, 24K Gold Plated, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
PENDANT:
DIAMETER:
-1: 1-11/64 inches (REF)
-2: 13/16 inch (REF)
THICKNESS (At edge):
-1: 0.095 inch ± 0.005 inch
-2: 0.055 inch ± 0.005 inch
DEVICE:
DIAMETER:
-1: 13/16 inch (REF)
-2: N/A (See Note 4)
THICKNESS (Overall):
-1: 0.085 inch ± 0.010 inch
-2: N/A (See Note 4)

DECORATION SET: Decoration set shall consist of a regular size medal, miniature medal, service ribbon, and lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type II, Class 7 pad.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above and shall match TIOH Hard Enamel Color Chip Number listed below.

TIOH HARD ENAMEL COLOR CHIP	
COLOR	**CHIP NUMBER**
Blue	#30

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Reverse to be flat, plain and suitable for engraving.

3. The wreath for -1 shall be superimposed after enameling using soft solder.

4. For -2 shall be made in one piece.

5. The specification slash sheet for the ribbon for the pendant drape and for the service ribbon is MIL-DTL-11589/53.

6. The specification slash sheet for the lapel button is MIL-DTL-11484/74.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-339)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:10Z
Check the source to verify that this is the current version before use.