MIL-STD-1286D

30 June 1987

SUPERSEDING

MIL-STD-1286C

9 September 1980

MILITARY STANDARD

TRANSFORMERS, INDUCTORS, AND COILS,

SELECTION AND USE OF

FSC 5950

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, DC 20301

Transformers, Inductors, and Coils,
Selection and Use of

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Department of the Army, U.S. Army Laboratory Command, ATTN: SLCET-RS, Electronics Technology and Device Laboratory, Fort Monmouth, NJ 07703-5302, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

FOREWORD

This standard provides a listing of transformers, inductors, and coils, selected as standard parts for use in the design of military equipment.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

CONTENTS

Paragraph			Page
	1.	SCOPE	1
	1.1	Scope	1
	1.2	Purpose of standard	1
	2.	REFERENCED DOCUMENTS	2
	2.1	Issues of documents	2
	3.	DEFINITIONS	3
	4.	GENERAL REQUIREMENTS	4
	4.1	Selection criteria	4
	4.1.1	Detail requirements	4
	4.1.2	Procurement information	4
	4.2	Conflict of requirements	4
	4.3	Criteria for inclusion in this standard	4
	4.4	Documentation of items not in this standard	4
	5.	DETAILED REQUIREMENTS	5
	6.	GENERAL APPLICATION INFORMATION	6
	6.1	General	6
	6.2	Transformer types	6
	6.3	Inductor types	6
	6.4	Coil types	6
	7.	SUPPLEMENTAL INFORMATION	11
	7.1	Metric equivalents	11
	7.2	International standardization agreement	11

SECTIONS

Section			
	100	TRANSFORMERS	100.1
	101	Transformers, Power	101.1
	102	Transformers, Audio Frequency	102.1
	103	Transformers, Pulse, Low Power	103.1
	200	INDUCTORS	200.1
	201	Inductors, Audio Frequency	201.1
	202	Inductors, Power	202.1
	300	COILS, RADIOFREQUENCY	300.1
	301	Coils, Radiofrequency, Variable, Unshielded (Iron Core)	301.1
	302	Coils, Radiofrequency, Variable, Unshielded (Ferrite Core)	302.1
	303	Coils, Radiofrequency, Variable, Shielded (Iron Core)	303.1
	304	Coils, Radiofrequency, Variable, Shielded (Ferrite Core)	304.1
	400	COILS, FIXED, RADIOFREQUENCY, ESTABLISHED RELIABILITY	400.1
	401	Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Phenolic Core-Iron Sleeve)	401.1
	402	Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Iron Core-Iron Sleeve)	402.1
	403	Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Ferrite Core-Ferrite Sleeve)	403.1
	404	Coils, Fixed, Radiofrequency, Molded, Established Reliability (Phenolic Core)	404.1
	405	Coils, Fixed, Radiofrequency, Molded, Established Reliability (Powdered Iron Core)	405.1
	406	Coils, Fixed, Radiofrequency, Molded, Established Reliability (Ferrite Core)	406.1
	500	COILS, CHIP, RADIOFREQUENCY, FIXED OR VARIABLE	500.1
	501	Coils, Chip, Radiofrequency, Fixed	501.1
	502	Coils, Chip, Radiofrequency, Variable	502.1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 Scope. This standard establishes requirements for the selection of transformers, inductors, and coils, shown in detail in sections 100, 200, 300, 400, and 500, for use in new design. Included are the following:

a. Selected standard transformers, inductors, and coils chosen jointly by the Departments of the Army, the Navy, and the Air Force for use in the design and manufacture of military equipment under the jurisdiction of the Department of Defense.
b. Guides for the choice and application of transformers, inductors, and coils for use in military equipment.

Complete detailed requirements for transformers, inductors, and coils listed in this standard are covered in the applicable specification sheets or Military Standard sheets (see 4.2). (The complete part number or type designation, and the number of the applicable specification sheet or Military Standard sheet, should be referenced in procurement documents for the transformers, inductors, and coils.) When it has been determined that circuit requirements cannot be met by items listed in this standard or where none of the types required are listed, the design engineer shall select an existing item or have one designed that is in accordance with the applicable procurement specification listed in 2.1 of this standard, and as approved by the cognizant military activity.

1.2 Purpose of standard. The purpose of this standard is to:

a. Provide the equipment designer with a list of transformers, inductors, and coils that are considered to be the most desirable for military applications.
b. Control and minimize the variety of transformers, inductors, and coils used in military equipment in order to facilitate logistic support of the equipment in the field.
c. Establish criteria pertinent to the choice, application, and use of transformers, inductors, and coils in military equipment.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government documents.

2.1.1 Specifications. Unless otherwise specified, the following specifications of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation form a part of this standard to the extent specified herein.

SPECIFICATIONS

Military

MIL-T-27	-	Transformers and Inductors (Audio, Power, and High-Power Pulse), General Specification For.
MIL-C-15305	-	Coils, Fixed and Variable, Radiofrequency, General Specification For.
MIL-T-21038	-	Transformers, Pulse, Low Power, General Specification For.
MIL-C-39010	-	Coils, Fixed, Radiofrequency, Molded, Established Reliability, General Specification For.
MIL-C-83446	-	Coils, Radio Frequency, Chip, Fixed or Variable General Specification For.

(Copies of the specifications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 The meaning of terms used in this standard are in accordance with MIL-T-27, MIL-C-15305, MIL-T-21038, MIL-C-39010, and MIL-C-83446.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Selection criteria. The selection of a transformer, inductor, or coil over another for a particular system and usage, depends upon many factors. These factors include function, construction, circuit application, operating temperature, altitude, type of mounting, environmental conditions, size and weight, life expectancy, and reliability. All factors are important and this document has been limited to units which will minimize the designer's necessity to completely evaluate each factor separately.

4.1.1 Detail requirements. After the preliminary selection of a transformer, inductor, or coil has been made, the appropriate specifications and Military Standard drawings should be examined to verify that the item is capable of performing satisfactorily in the intended application and that parameters important to the new application are controlled to the degree necessary.

4.1.2 Procurement information. Procurement documents for items selected from this standard should reference the applicable specification sheet or Military Standard drawings, the complete part number, style or type designation, and the procurement specification. Do not use this standard for procurement.

4.2 Conflict of requirements. After selection of a particular transformer, inductor, or coil from this document, the design engineer should refer to the applicable specification sheet or Military Standard sheet for any technical conflicts. In the event of a conflict between the technical requirements described in this standard and those of the applicable specification sheet or Military Standard sheet, the latter shall govern.

4.3 Criteria for inclusion in this standard. The criteria for the inclusion of transformers, inductors, and coils in this standard are as follows:

a. The transformer, inductor, or coil shall be the best type available for general use in military equipment.
b. Transformers, inductors, and coils shall be covered by military specifications (see 2.1).
c. Transformers, inductors, and coils shall be listed on a qualified products list.

4.4 Documentation of items not in this standard. When a designer cannot find an item listed in this standard that will meet the performance requirements of the application, it will be necessary to select an item in existence that will meet the requirements of the application or if there is none, it will be necessary to have a new item designed. Documentation of such items shall be adequate for the Government to reprocure the item from the same source of supply and from an alternate source of supply should the need arise.

(In this instance, "alternate source of supply" is to be interpreted to mean a facility having equivalent technical and manufacturing capability currently engaged in the manufacture of similar devices, as the original source.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 The detailed requirements for the standard transformer, inductor, and coil types are contained in the applicable specification, and in the applicable section of this standard.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

6. GENERAL APPLICATION INFORMATION

6.1 General. The application information in this standard is designed to help the engineer select the transformer, inductor, or coil he will specify. As with other types of components, the most important thing a user must decide is which transformer, inductor, or coil will be the best for use in the military equipment he is designing. Proper selection in its broadest sense is the first step in building reliable equipment. To select properly the transformer, inductor, or coil to be used, the user must know as much as possible about the types from which he can choose. He should know their advantages and disadvantages, their behavior under various environmental conditions, their construction, and their effect on circuits and the effect of circuits on them. He should know the failure modes. He should also have an intimate working knowledge of the applicable military specification.

6.2 Transformer types. This standard covers power transformers (section 101), audio frequency transformers (section 102), and low power pulse transformers (section 103). Tables I and II provide a selection guide for power transformers and audio frequency transformers.

6.3 Inductor types. This standard covers audio frequency inductors (section 201), power inductors (section 202). Tables III and IV provide a selection guide for audio frequency inductors, power inductors.

6.4 Coil types. This standard covers radiofrequency coils (sections 300, 400, and 500). Tables V, VI, and VII provide a selection guide for radiofrequency coils.

6.5 Subject term (keyword) listing.

Coils, Radiofrequency, Chip, Fixed.
Coils, Radiofrequency, Chip, Variable.
Coils, Radiofrequency, Established Reliability.
Coils, Radiofrequency, Fixed.
Coils, Radiofrequency, Variable.
Inductors, Audio Frequency.
Transformers, Audio Frequency.
Transformers, Power.
Transformers, Pulse, Low Power.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE I. Power transformers (see section 101).

Applicable MIL-T-27 specification sheet	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Volt-ampere rating
400 HERTZ TRANSFORMERS				
82	26	3.8 CT	.002	.008
180	57.5, 99.7, 115	12.6, 12.6 CT	2, 2	51
350	115	5 to 115	0.13 to 3.00	15
351	115	5 to 115	0.21 to 5.00	25
352	115	5 to 115	0.43 to 10.00	50
332	115	5 to 120	0.058 to 1.40	7
333	115	5 to 120	0.083 to 2.0	10
334	115	5 to 120	0.208 to 5.0	25
335	115	5 to 120	0.41 to 8.0	50
336	115	5 to 120	7.0 to 12.0	120
337	115	5 to 120	1.25 to 30.0	150
338	115	5 to 138	.014 to .400	2
339	115	5 to 220	.027 to 1.2	6
340	115	5 to 220	.068 to 3.0	15
341	115	5 to 220	.109 to 4.8	24
342	115	5 to 220	.364 to 16.0	80
343	115	5 to 220	.790 to 35.0	175
37,38,48,49	115	6 to 300	.25 to .005	1.5
39,40,50,51	115	6 to 300	.5 to .01	3
118	115	40 CT	.078	3,12
41,42,52,53	115	6 to 300	1.0 to .02	6
43,54	115	6 to 300	1.5 to .03	9
44,45,55,61	115	6 to 300	2.667 to .053	16
46,47,56,62	115	6 to 300	4.167 to .083	25
57,63	115	6 to 300	8.33 to .167	50
353	115	7 to 115	0.65 to 10.0	75
354	115	10 to 115	0.87 to 10.0	100
77	115	115	.45	57
269	115	115	.5	57.5
58,64	115	10 to 300	7.5 to .25	75
59,65	115	12 to 300	8.33 to .33	100

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE I. Power transformers (see section 101) - Continued.

Applicable MIL-T-27 specification sheet	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Volt-ampere rating
400 HERTZ TRANSFORMERS				
60,66	115	26 to 300	9.62 to .83	250
134	120	28.6	.385	12
211	250	1	.5	.5
212	250	250, 25	.2, .01	50
60 HERTZ TRANSFORMERS				
127	100	21.2, 21.2, 7.78 CT	.1, .1, .225	1.75
300	105, 115, 125	2.5 to 6.3	3 to 20	7.5 to 126
326	115	5.0 to 120	.04 t0 1.0	5
327	115	5.0 to 120	.12 to 3.0	15
328	115	5.0 to 120	.24 to 6.0	30
329	115	5.0 to 120	.48 to 12.0	60
330	115	5.0 to 120	1.16 to 20.0	100 to 140
312	115	5.0 to 138	.036 to 1.0	5
313	115	5.0 to 220	.045 to 2.0	10
314	115	5.0 to 220	.068 to 3.0	15
315	115	5.0 to 220	.091 to 4.0	20
316	115	5.0 to 220	.136 to 6.0	30
317	115	5.0 to 220	.182 to 8.0	40
318	115	5.0 to 220	.364 to 16.0	80
319	115	6.3 to 220	.546 to 19.0	120
19	115	6.3, 52 CT	3, 1	52
181	115	6.3 CT, 450 CT	2, 3 mA	26.1
156	115	7.76 to 13.44	105 mA	4.8
320	115	8.0 to 220	.728 to 20.0	160
331	115	8.0 to 120	1.41 to 20.0	160, 170
157	115	8.25 to 13.44	.4	16
321	115	10.0 to 220	.914 to 20.0	200
322	115	16.0 to 220	1.36 to 18.70	300
140	115	50	2	100
235	115	115	.435 to 15.5	50 to 100
268	115	115	1	115

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:43Z
Check the source to verify that this is the currentversion before use.

TABLE II. Audio frequency transformers (see section 102).

Applicable MIL-T-27 specification sheet	Power 1/ rating (milliwatts)	Frequency response (hertz)	Primary 1/ impedance range (ohms)	Secondary 1/ impedance range (ohms)
197	4 to 10,000	30 to 20,000	20 to 30 K	16 to 80 K
166	3 to 250	50 to 10,000	82 to 20 K	8 to 1 M
363	.1 to 2 watts	50 to 50,000	150 to 100 K	150 to 10 K
67	500	60 to 10,000	250 to 10 K	4 to 10 K
68	500	100 to 10,000	250 to 10 K	4 to 25 K
69	500	100 to 20,000	250 to 25 K	4 to 25 K
362	.1 to 1 watts	150 to 75,000	150 to 100 K	150 to 10 K
247	2 watts	200 to 10,000	600 to 10 K	3.2 to 10 K
165	10 to 250	200 to 20,000	50 to 100 K	3.2 to 250 K
70	60, 150	200 to 50,000	600 to 100 K	4 to 10 K
1	2 watts	250 to 500	4 K	8
2	2 watts	250 to 500	4 K	8
277	1	300 to 3000	150	150
307	7	300 to 4000	600 SPLIT	600
200	30	300 to 10,000	30 K	50
3	15 dBm	"	10 K CT	22.5 K CT, 90 K CT
4	2 watts	"	600 CT/150 SP	16, 8, 4
5	15 dBm	"	600 CT/150 SP	135 K CT
6	15 dBm	"	600 CT/150 SP	600 CT/150 SP
7	2 watts	"	7.6K, 4.8 K	600 CT/150 SP
8	2 watts	"	7.6K, 4.8 K	16, 8, 4
9	2 watts	"	15 K CT	600 CT/150 SP
10	1 watt	"	24 K CT	600 CT/150 SP
167	5, 100	300 to 20,000	50 to 50 K	3.2 to 90 K
76	25, 50, 100	300 to 20,000	1K to 200 K	50 to 12 K
361	.6 watts	300 to 75,000	150 to 15 K	150 to 10 K
72	10, 50	300 to 100,000	600 to 100 K	60 to 10 K
71	10, 30	300 to 100,000	600 to 100 K	4 to 25 K
172	25 to 600	300 to 100,000	80 to 200 K	3.2 to 12 K
173	40, 75, 80	300 to 250,000	1 K to 25 K	12 to 8 K
103	50 to 500	400 to 100,000	80 to 30 K	32 to 12 K
97	125	400 to 100,000	2K	8 K
125	.001	10,000 to 20,000	15	100 K
144	60 to 600	400 to 100,000	80 to 20 K	3.2 to 10 K

1/ Where a range is given, the specification covers two or more parts.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the currentversion before use.

TABLE III. Audio inductors (see section 201).

Applicable MIL-T-27 specification sheet	Inductance range (millihenries)	DC current (milliamperes)	DC resistance (ohms)
168	.1 H to 100 H @ 1 kHz/400 Hz	55 to 1.1	14 to 8550
241	.6 to 40 @ 1 kHz	90 to 11	1.9 to 132
214	1 to 10	0	2.3 to 26
146	1 to 100 @ 1 kHz	60 to 6	1.4 to 132
240	3 to 120 @ 1 kHz	50 to 8	4.8 to 94
124	5	28	7
145 1/	6 mH to 150 H	100 to 1.5	.5 to 15.6 K
205	7 mH to 35 H @ 1 kHz, 500 Hz	250 to 3	.6 to 3.2 K
111, 112	10 @ 400 Hz	.05	.5
147	10 mH to 60 H @ 500 Hz, 400 Hz	400 to 4	.3 to 1.67 K
161	50 mH to 5 H @ 1 kHz	25 to 3	27 to 2.5 K
285	100 to 750 @ 1 kHz	7 to 2.5	70 to 540
163	100 mH to 10 H @ 400 Hz	55 to 1.1	14 to 8.5 K
164	150 mH to 60 H	12 to .2	33 to 5.16 K
162	2.0/.5 H to 600/150 H 2/ @ 60 Hz	0	21 to 5.72 K
175	1/.25 H to 2500/652 H 2/ @ 60 Hz	0	5 to 13 K

1/ Variable audio inductor.
2/ The first entry indicates a series connection, the second entry indicates a parallel (split) connection.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE IV. Power inductors (see section 202).

Applicable MIL-T-27/ specification sheet	Inductance range (henries)	DC current (amperes)	DC resistance (ohms)
287	8 µH to 1,250 µH	1.2 to 15	.005 to .7
288	20 µH to 3,000 µH	1.2 to 15	.008 to 1.2
304	22 µH @ 1 kHz	2.5	.2
119	25 µH @ 20 kHz	35	.004
84	40 µH @ 20 kHz	1.5	.045
191	40 µH min @ 16 kHz 60 µH max	4.8	
86	50 µH @ 10 kHz	.5	.25
135	60 µH @ 10 kHz	3	.025
229	60 µH @ 10 kHz	6	.025
289	60 µH to 10,000 µH @ 10 kHz	1.1 to 13.6	2.1 to .014
137	67.5 µH min @ 2.4 kHz 86.25 µH max	2.7	.045
88	72 µH @ 10 kHz	1	.3
305	75 µH @ 1 kHz	8	.025
120	120 µH @ 2.4 kHz	1.5	.0584
286	30 µH to 5,000 µH @ 20 kHz	.25 to 3	.35 to 5.60
190	250 µH @ 20 kHz	.75	2
85	374 µH min @ 10 kHz 506 µH max	1.0	.07
89	450 µH @ 400 Hz	.5	.2
303	600 µH @ 1 kHz	2.5	.2
356	.01 mH to 20 mH	.06 to 7.76	.015 to 54
123	1 mH @ 20 kHz	3	.124
234	1 mH @ 1 kHz	1.5	.36
261	1.35 mH @ 800 Hz	3.85	.2
189	1.5 mH @ 16 kHz	1.5	1.6
259	2.2 mH @ 800 Hz	2.35	.15
98	3.9 mH @ 1 kHz	2.0	.41
171 1/	9 to 45 mH (series) 2.25 to 11.25 mH (parallel)	.75 to .035 (series) 1.5 to .07 (parallel)	0.52 (1-2) 0.68 (3-4)
160	1 H @ 60 Hz	.200	69
179	1 H @ 60 Hz	.325	44
149	1.5 H @ 50 Hz	45 mA	225
174	11 H @ 60 Hz	.2	85
298	25 H @ 60 Hz	.04	600

1/ The first entry indicates series connection, the second entry indicates parallel (split) connection.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE V. Coils, radiofrequency, variable (see section 300).

Applicable MIL-C-15305 MS sheet number	Inductance 1/ range (μH)		Q range		Self resonant frequency range (MHz)		Current range (mA)		Core	Maximum operating temperature
	Min	Max	Min	Max	Min	Max	Min	Max		
53229	.020	8.2	25	50	20	1000	25	50	Iron	105°C
53230	5.5	1 MH	20	30	1.1	34	11	57	Ferrite	105°C
21381	.10	82	45	67	9.35	250	174	1510	Iron	105°C
21402	100	100,000	39	61	.152	8.40	14	180	Ferrite	105°C

TABLE VII. Coils, fixed, radiofrequency, established reliability (see section 400).

Applicable MIL-C-39010 specification sheet	Inductance range (μH)		Inductance tolerance (±%)	Q range		Self resonant frequency range (MHz)		Current range (mA)		Core	Maximum operating temperature
	Min	Max		Min	Max	Min	Max	Min	Max		
1	.10	.82	5, 10	40	50	180	250	370	1790	Phenolic	105°C
2	1.00	12.0	5, 10	44	55	44	140	200	1070	Iron	105°C
3	15.00	1000	5, 10	18	60	.11	49	11	315	Ferrite	105°C
4	.15	2.7	5, 10, 20	30	55	120	510	460	2900	Phenolic	105°C
5	3.30	27.0	5, 10	30	65	22	70	205	945	Powdered iron	105°C
6	.15	4.7	5, 10, 20	33	50	90	525	260	2450	Phenolic	125°C
7	5.6	33	5, 10	45	75	19	60	165	495	Powdered iron	105°C
8	.10	1.00	5, 10	25	40	230	680	385	1350	Phenolic	125°C
9	1.2	27	5, 10	25	50	20	150	135	590	Iron	105°C
10	33	1000	5, 10	30	50	3.4	24	28	130	Ferrite	105°C

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE VII. Coils, chip, radiofrequency (see section 500).

COILS, CHIP RADIOFREQUENCY, FIXED (SECTION 501)									
Applicable MIL-C-83446 specification sheet	Inductance range (H) ±10% tolerance		Q range		Self resonant frequency range (MHz)		Maximum current range (mA)		Maximum operating temperature
	Min	Max	Min	Max	Min	Max	Min	Max	
1	.01	1000	28	60	1.7	900	19	650	125°C
4	.01	27	32	60	22	750	120	1270	125°C
5	.01	10	42	60	33	2000	87	750	125°C
8	.01	56	30	60	8.5	2000	33	750	125°C
10	.01	1000	30	75	1.7	2000	25	1000	125°C
11	.10	10,000	85	115	.70	600	21	1000	125°C
6	12.0	1,000	12	64	1.5	26	15	110	125°C
12	.01	1,000	33	60	1.1	1200	10	750	125°C
15	.01	1,000	33	60	1.1	1200	10	750	125°C
COILS, CHIP, RADIOFREQUENCY, VARIABLE (SECTION 502)									
Applicable MIL-C-83446 specification sheet	Inductance Inductance range (µH)		Q range		Self resonant frequency range (MHz)		Maximum current range (mA)		Maximum operating temperature
	Min	Max	Min	Max	Min	Max	Min	Max	
7	.018	68	19	52	7	1200	32	750	125°C
9	.018	120	22	55	3	1200	22	750	125°C
16	.010	1,000	20	60	1.1	1200	11	250	125°C
17	.010	1,000	20	60	1.1	1200	11	250	125°C
18	.010	1,000	20	60	1.1	1200	11	250	125°C
19	.010	1,000	20	60	1.1	1200	11	250	125°C

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

7. SUPPLEMENTAL INFORMATION

7.1 Metric equivalents. The metric equivalents (to the nearest .01 mm) which are provided in the individual sections are for general information only are based upon 1 inch = 25.4 mm.

7.2 International standardization agreement. Certain provisions of the specifications referenced in this standard are the subject of international standardization agreement (NEPR No. 20). When amendment, revision, or cancellation of these specifications is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization offices, if required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 100

TRANSFORMERS

1. Scope. This section covers audio, power, and low-power pulse transformers for use in electronic and communication equipment, as follows:

Section		Applicable specification
101	Transformers, Power - - - - - - - - - - - -	MIL-T-27
102	Transformers, Audio Frequency - - - - - - -	MIL-T-27
103	Transformers, Pulse, Low Power- - - - - - -	MIL-T-21038

2. Identification.

2.1 Type designation. The type designation is used for describing certain characteristics of the transformers covered in MIL-T-27 and MIL-T-21038 and is shown in figures 100-1 and 100-2.

2.2 Part number. The part number is used for identifying a discrete transformer. (Example: M27/177-01 or M21038/8-001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

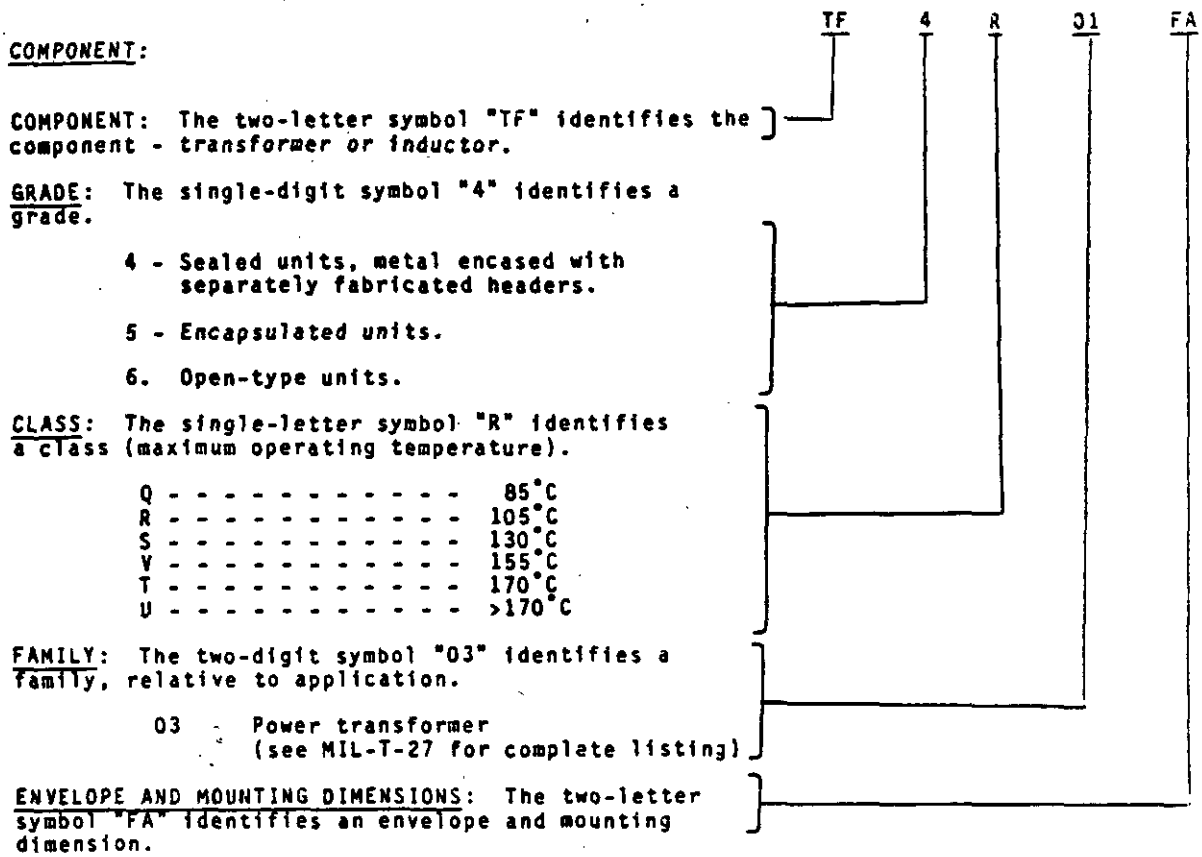


FIGURE 100-1. Type designation example (MIL-T-27).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

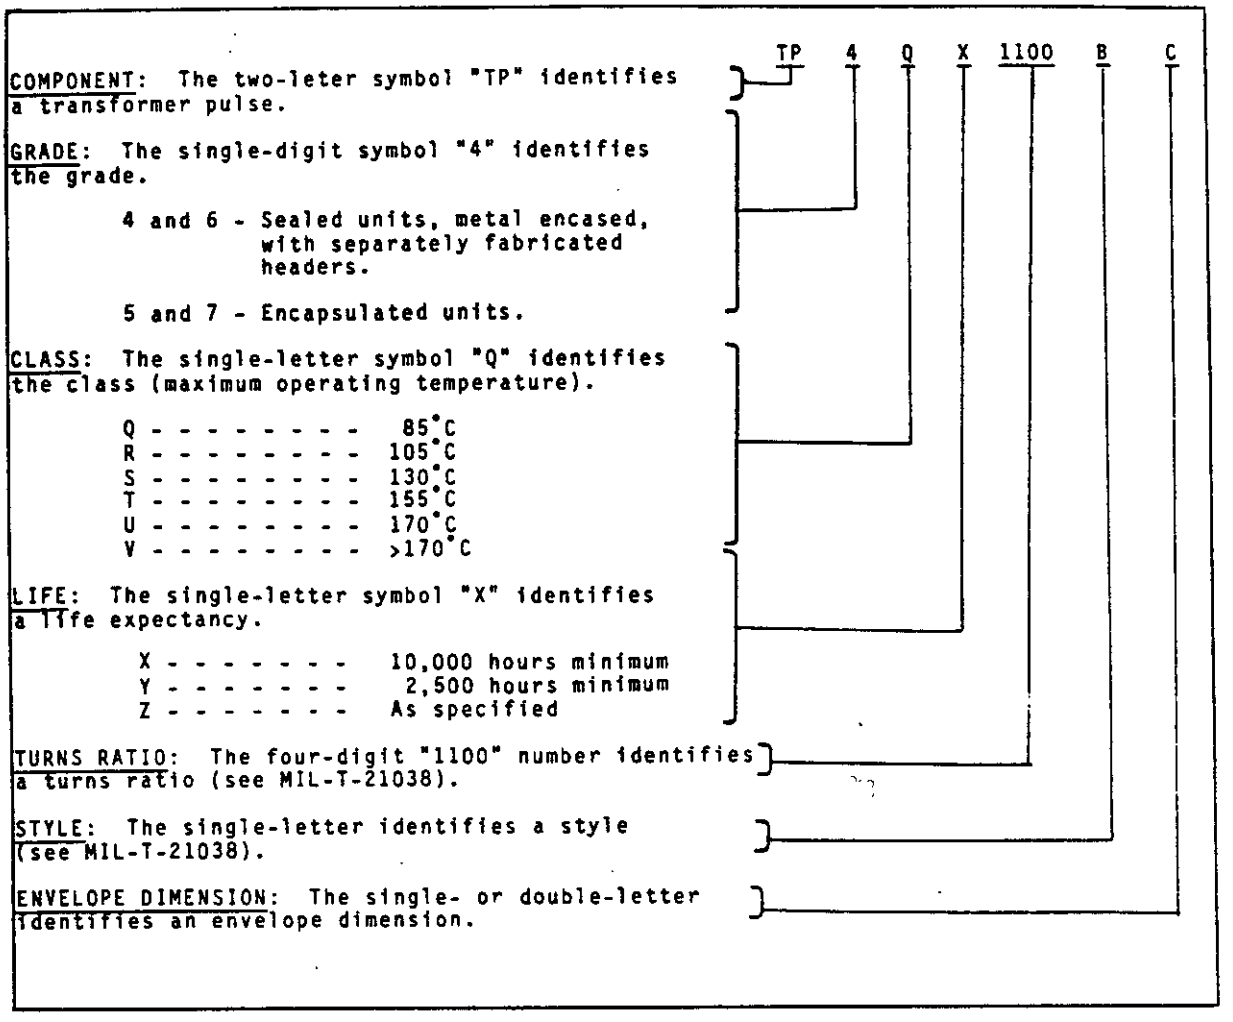


FIGURE 100-2. Type designation example (MIL-T-21038).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/19	115	52 CT	1.0	357				
-01	60 Hz (1-2)	(3-5)		(1-2) 357 (3.5)	52	5	130°C	See MIL-T-27/19
MIL-T-27/37								
-01 (A-B)	115, 400 Hz	6 CT (3-5)	0.250	325	1.5	5	130°C	See figure 101-1
-02 (A-B)	(1-2)	6.3 CT	0.238	"	"	"	"	A and B - 1.09 in. max
-03 (A-B)	"	7 "	0.214	"	"	"	"	C - .47 in. max
-04 (A-B)	"	7.5 "	0.200	"	"	"	"	D and E - .800 in.
-05 (A-B)	"	8 "	0.188	"	"	"	"	F and G -.600 in. max
-06 (A-B)	"	9 "	0.167	"	"	"	"	H - .75 in. dia
-07 (A-B)	"	10 "	0.150	"	"	"	"	J - .138
-08 (A-B)	"	11 "	0.136	"	"	"	"	
-09 (A-B)	"	12 "	0.125	"	"	"	"	
-10 (A-B)	"	12.6 "	0.119	"	"	"	"	
-11 (A-B)	"	13 "	0.115	"	"	"	"	
-12 (A-B)	"	15 "	0.100	"	"	"	"	
-13 (A-B)	"	16 "	0.094	"	"	"	"	
-14 (A-B)	"	18 "	0.083	"	"	"	"	
-15 (A-B)	"	20 "	0.075	"	"	"	"	
-16 (A-B)	"	22 "	0.068	"	"	"	"	
-17 (A-B)	"	24 "	0.063	"	"	"	"	
-18 (A-B)	"	26 "	0.058	"	"	"	"	
-19 (A-B)	"	28 "	0.053	"	"	"	"	
-20 (A-B)	"	30 "	0.050	"	"	"	"	
-21 (A-B)	"	33 "	0.045	"	"	"	"	
-22 (A-B)	"	36 "	0.042	"	"	"	"	
-23 (A-B)	"	39 "	0.038	"	"	"	"	
-24 (A-B)	"	43 "	0.035	"	"	"	"	
-25 (A-B)	"	47 "	0.032	"	"	"	"	
-26 (A-B)	"	51 "	0.029	"	"	"	"	
-27 (A-B)	"	56 "	0.027	"	"	"	"	
-28 (A-B)	"	62 "	0.024	"	"	"	"	
-29 (A-B)	"	68 "	0.022	"	"	"	"	
-30 (A-B)	"	75 "	0.020	"	"	"	"	
-31 (A-B)	"	82 "	0.018	"	"	"	"	
-32 (A-B)	"	91 "	0.016	"	"	"	"	
-33 (A-B)	"	100 "	0.015	"	"	"	"	
-34 (A-B)	"	110 "	0.014	"	"	"	"	
-35 (A-B)	"	115 "	0.013	"	"	"	"	
-36 (A-B)	"	120 "	0.0125	"	"	"	"	
-37 (A-B)	"	130 "	0.0115	"	"	"	"	
-38 (A-B)	"	150 "	0.010	"	"	"	"	
-39 (A-B)	"	180 "	0.0085	"	"	"	"	
-40 (A-B)	"	200 "	0.0075	440	"	"	"	
-41 (A-B)	"	220 "	0.007	440	"	"	"	
-42 (A-B)	"	240 "	0.006	440	"	"	"	
-43 (A-B)	"	270 "	0.0055	580	"	"	"	
-44 (A-B)	"	300 "	0.005	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/38								
-01 (A-B)	115, 400 Hz	6 CT	0.250	325	1.5	5	130°C	See figure 101-1
-02 (A-B)	"	6.3 "	0.238	"	"	"	"	A and B - 1.09 in. max
-03 (A-B)	"	7 "	0.214	"	"	"	"	C - .59 in. max
-04 (A-B)	"	7.5 "	0.200	"	"	"	"	D and E - .800 in.
-05 (A-B)	"	8 "	0.188	"	"	"	"	F and G -.600 in.
-06 (A-B)	"	9 "	0.167	"	"	"	"	H - .75 in. dia
-07 (A-B)	"	10 "	0.150	"	"	"	"	J - .138
-08 (A-B)	"	11 "	0.136	"	"	"	"	
-09 (A-B)	"	12 "	0.125	"	"	"	"	
-10 (A-B)	"	12.6 "	0.119	"	"	"	"	
-11 (A-B)	"	13 "	0.115	"	"	"	"	
-12 (A-B)	"	15 "	0.100	"	"	"	"	
-13 (A-B)	"	16 "	0.094	"	"	"	"	
-14 (A-B)	"	18 "	0.083	"	"	"	"	
-15 (A-B)	"	20 "	0.075	"	"	"	"	
-16 (A-B)	"	22 "	0.068	"	"	"	"	
-17 (A-B)	"	24 "	0.063	"	"	"	"	
-18 (A-B)	"	26 "	0.058	"	"	"	"	
-19 (A-B)	"	28 "	0.053	"	"	"	"	
-20 (A-B)	"	30 "	0.050	"	"	"	"	
-21 (A-B)	"	33 "	0.045	"	"	"	"	
-22 (A-B)	"	36 "	0.042	"	"	"	"	
-23 (A-B)	"	39 "	0.038	"	"	"	"	
-24 (A-B)	"	43 "	0.035	"	"	"	"	
-25 (A-B)	"	47 "	0.032	"	"	"	"	
-26 (A-B)	"	51 "	0.029	"	"	"	"	
-27 (A-B)	"	56 "	0.027	"	"	"	"	
-28 (A-B)	"	62 "	0.024	"	"	"	"	
-29 (A-B)	"	68 "	0.022	"	"	"	"	
-30 (A-B)	"	75 "	0.020	"	"	"	"	
-31 (A-B)	"	82 "	0.018	"	"	"	"	
-32 (A-B)	"	91 "	0.016	"	"	"	"	
-33 (A-B)	"	100 "	0.015	"	"	"	"	
-34 (A-B)	"	110 "	0.014	"	"	"	"	
-35 (A-B)	"	115 "	0.013	"	"	"	"	
-36 (A-B)	"	120 "	0.0125	"	"	"	"	
-37 (A-B)	"	130 "	0.0115	"	"	"	"	
-38 (A-B)	"	150 "	0.010	"	"	"	"	
-39 (A-B)	"	180 "	0.0085	"	"	"	"	
-40 (A-B)	"	200 "	0.0075	440	"	"	"	
-41 (A-B)	"	220 "	0.007	440	"	"	"	
-42 (A-B)	"	240 "	0.006	440	"	"	"	
-43 (A-B)	"	270 "	0.0055	580	"	"	"	
-44 (A-B)	"	300 "	0.005	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/39								
-01 (A-B)	115, 400 Hz	6 CT	0.500	325	3.0	5	130°C	See figure 101-1
-02 (A-B)	"	6.3 "	0.476	"	"	"	"	A and B - 1.09 in. max
-03 (A-B)	"	7 "	0.429	"	"	"	"	C - .59 in. max
-04 (A-B)	"	7.5 "	0.400	"	"	"	"	D and E - .800 in.
-05 (A-B)	"	8 "	0.375	"	"	"	"	F and G -.600 in.
-06 (A-B)	"	9 "	0.333	"	"	"	"	H - .75 in. dia
-07 (A-B)	"	10 "	0.300	"	"	"	"	J - .138
-08 (A-B)	"	11 "	0.273	"	"	"	"	
-09 (A-B)	"	12 "	0.250	"	"	"	"	
-10 (A-B)	"	12.6 "	0.238	"	"	"	"	
-11 (A-B)	"	13 "	0.231	"	"	"	"	
-12 (A-B)	"	15 "	0.200	"	"	"	"	
-13 (A-B)	"	16 "	0.188	"	"	"	"	
-14 (A-B)	"	18 "	0.167	"	"	"	"	
-15 (A-B)	"	20 "	0.150	"	"	"	"	
-16 (A-B)	"	22 "	0.136	"	"	"	"	
-17 (A-B)	"	24 "	0.125	"	"	"	"	
-18 (A-B)	"	26 "	0.115	"	"	"	"	
-19 (A-B)	"	28 "	0.107	"	"	"	"	
-20 (A-B)	"	30 "	0.100	"	"	"	"	
-21 (A-B)	"	33 "	0.091	"	"	"	"	
-22 (A-B)	"	36 "	0.083	"	"	"	"	
-23 (A-B)	"	39 "	0.077	"	"	"	"	
-24 (A-B)	"	43 "	0.070	"	"	"	"	
-25 (A-B)	"	47 "	0.064	"	"	"	"	
-26 (A-B)	"	51 "	0.059	"	"	"	"	
-27 (A-B)	"	56 "	0.054	"	"	"	"	
-28 (A-B)	"	62 "	0.048	"	"	"	"	
-29 (A-B)	"	68 "	0.044	"	"	"	"	
-30 (A-B)	"	75 "	0.040	"	"	"	"	
-31 (A-B)	"	82 "	0.037	"	"	"	"	
-32 (A-B)	"	91 "	0.033	"	"	"	"	
-33 (A-B)	"	100 "	0.030	"	"	"	"	
-34 (A-B)	"	110 "	0.027	"	"	"	"	
-35 (A-B)	"	115 "	0.026	"	"	"	"	
-36 (A-B)	"	120 "	0.025	"	"	"	"	
-37 (A-B)	"	130 "	0.023	"	"	"	"	
-38 (A-B)	"	150 "	0.020	"	"	"	"	
-39 (A-B)	"	180 "	0.017	"	"	"	"	
-40 (A-B)	"	200 "	0.015	440	"	"	"	
-41 (A-B)	"	220 "	0.014	440	"	"	"	
-42 (A-B)	"	240 "	0.013	440	"	"	"	
-43 (A-B)	"	270 "	0.011	580	"	"	"	
-44 (A-B)	"	300 "	0.010	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/40								
-01 (A-B)	115, 400 Hz	6 CT	0.500	325	3.0	5	130°C	See figure 101-1
-02 (A-B)	"	6.3 "	0.476	"	"	"	"	A and B - 1.09 in. max
-03 (A-B)	"	7 "	0.429	"	"	"	"	C - .78 in. max
-04 (A-B)	"	7.5 "	0.400	"	"	"	"	D and E - .800 in.
-05 (A-B)	"	8 "	0.375	"	"	"	"	F and G - .600 in. max
-06 (A-B)	"	9 "	0.333	"	"	"	"	H - .75 in. dia
-07 (A-B)	"	10 "	0.300	"	"	"	"	J - .138
-08 (A-B)	"	11 "	0.273	"	"	"	"	
-09 (A-B)	"	12 "	0.250	"	"	"	"	
-10 (A-B)	"	12.6 "	0.238	"	"	"	"	
-11 (A-B)	"	13 "	0.231	"	"	"	"	
-12 (A-B)	"	15 "	0.200	"	"	"	"	
-13 (A-B)	"	16 "	0.188	"	"	"	"	
-14 (A-B)	"	18 "	0.167	"	"	"	"	
-15 (A-B)	"	20 "	0.150	"	"	"	"	
-16 (A-B)	"	22 "	0.136	"	"	"	"	
-17 (A-B)	"	24 "	0.125	"	"	"	"	
-18 (A-B)	"	26 "	0.115	"	"	"	"	
-19 (A-B)	"	28 "	0.107	"	"	"	"	
-20 (A-B)	"	30 "	0.100	"	"	"	"	
-21 (A-B)	"	33 "	0.091	"	"	"	"	
-22 (A-B)	"	36 "	0.083	"	"	"	"	
-23 (A-B)	"	39 "	0.077	"	"	"	"	
-24 (A-B)	"	43 "	0.070	"	"	"	"	
-25 (A-B)	"	47 "	0.064	"	"	"	"	
-26 (A-B)	"	51 "	0.059	"	"	"	"	
-27 (A-B)	"	56 "	0.054	"	"	"	"	
-28 (A-B)	"	62 "	0.048	"	"	"	"	
-29 (A-B)	"	68 "	0.044	"	"	"	"	
-30 (A-B)	"	75 "	0.040	"	"	"	"	
-31 (A-B)	"	82 "	0.037	"	"	"	"	
-32 (A-B)	"	91 "	0.033	"	"	"	"	
-33 (A-B)	"	100 "	0.030	"	"	"	"	
-34 (A-B)	"	110 "	0.027	"	"	"	"	
-35 (A-B)	"	115 "	0.026	"	"	"	"	
-36 (A-B)	"	120 "	0.025	"	"	"	"	
-37 (A-B)	"	130 "	0.023	"	"	"	"	
-38 (A-B)	"	150 "	0.020	"	"	"	"	
-39 (A-B)	"	180 "	0.017	"	"	"	"	
-40 (A-B)	"	200 "	0.015	440	"	"	"	
-41 (A-B)	"	220 "	0.014	440	"	"	"	
-42 (A-B)	"	240 "	0.013	440	"	"	"	
-43 (A-B)	"	270 "	0.011	580	"	"	"	
-44 (A-B)	"	300 "	0.010	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/41								
-01 (A-B)	115, 400 Hz	6 CT	1.000	325	6	5	130°C	See figure 101-1
-02 (A-B)	"	6.3 "	0.953	"	"	"	"	A and B - 1.09 in. max
-03 (A-B)	"	7 "	0.857	"	"	"	"	C - .78 in. max
-04 (A-B)	"	7.5 "	0.800	"	"	"	"	D and E - .800 in.
-05 (A-B)	"	8 "	0.750	"	"	"	"	F and G - .600 in.
-06 (A-B)	"	9 "	0.667	"	"	"	"	H - .75 in. dia
-07 (A-B)	"	10 "	0.600	"	"	"	"	J - .138
-08 (A-B)	"	11 "	0.545	"	"	"	"	
-09 (A-B)	"	12 "	0.500	"	"	"	"	
-10 (A-B)	"	12.6 "	0.476	"	"	"	"	
-11 (A-B)	"	13 "	0.462	"	"	"	"	
-12 (A-B)	"	15 "	0.400	"	"	"	"	
-13 (A-B)	"	16 "	0.375	"	"	"	"	
-14 (A-B)	"	18 "	0.333	"	"	"	"	
-15 (A-B)	"	20 "	0.300	"	"	"	"	
-16 (A-B)	"	22 "	0.272	"	"	"	"	
-17 (A-B)	"	24 "	0.250	"	"	"	"	
-18 (A-B)	"	26 "	0.230	"	"	"	"	
-19 (A-B)	"	28 "	0.214	"	"	"	"	
-20 (A-B)	"	30 "	0.200	"	"	"	"	
-21 (A-B)	"	33 "	0.182	"	"	"	"	
-22 (A-B)	"	36 "	0.167	"	"	"	"	
-23 (A-B)	"	39 "	0.154	"	"	"	"	
-24 (A-B)	"	43 "	0.140	"	"	"	"	
-25 (A-B)	"	47 "	0.128	"	"	"	"	
-26 (A-B)	"	51 "	0.118	"	"	"	"	
-27 (A-B)	"	56 "	0.107	"	"	"	"	
-28 (A-B)	"	62 "	0.097	"	"	"	"	
-29 (A-B)	"	68 "	0.088	"	"	"	"	
-30 (A-B)	"	75 "	0.080	"	"	"	"	
-31 (A-B)	"	82 "	0.073	"	"	"	"	
-32 (A-B)	"	91 "	0.066	"	"	"	"	
-33 (A-B)	"	100 "	0.060	"	"	"	"	
-34 (A-B)	"	110 "	0.055	"	"	"	"	
-35 (A-B)	"	115 "	0.052	"	"	"	"	
-36 (A-B)	"	120 "	0.050	"	"	"	"	
-37 (A-B)	"	130 "	0.046	"	"	"	"	
-38 (A-B)	"	150 "	0.040	"	"	"	"	
-39 (A-B)	"	180 "	0.033	"	"	"	"	
-40 (A-B)	"	200 "	0.030	440	"	"	"	
-41 (A-B)	"	220 "	0.027	440	"	"	"	
-42 (A-B)	"	240 "	0.025	440	"	"	"	
-43 (A-B)	"	270 "	0.022	580	"	"	"	
-44 (A-B)	"	300 "	0.020	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/42								
-01 (A-B)	115, 400 Hz	6 CT	1.000	325	6	5	130°C	See figure 101-1
-02 (A-B)	"	6.3 "	0.953	"	"	"	"	A and B - 1.09 in. max
-03 (A-B)	"	7 "	0.857	"	"	"	"	C - 1.03 in. max
-04 (A-B)	"	7.5 "	0.800	"	"	"	"	D and E - .800 in.
-05 (A-B)	"	8 "	0.750	"	"	"	"	F and G - .600 in.
-06 (A-B)	"	9 "	0.667	"	"	"	"	H - .75 in. dia
-07 (A-B)	"	10 "	0.600	"	"	"	"	J - .138
-08 (A-B)	"	11 "	0.545	"	"	"	"	
-09 (A-B)	"	12 "	0.500	"	"	"	"	
-10 (A-B)	"	12.6 "	0.476	"	"	"	"	
-11 (A-B)	"	13 "	0.462	"	"	"	"	
-12 (A-B)	"	15 "	0.400	"	"	"	"	
-13 (A-B)	"	16 "	0.375	"	"	"	"	
-14 (A-B)	"	18 "	0.333	"	"	"	"	
-15 (A-B)	"	20 "	0.300	"	"	"	"	
-16 (A-B)	"	22 "	0.272	"	"	"	"	
-17 (A-B)	"	24 "	0.250	"	"	"	"	
-18 (A-B)	"	26 "	0.230	"	"	"	"	
-19 (A-B)	"	28 "	0.214	"	"	"	"	
-20 (A-B)	"	30 "	0.200	"	"	"	"	
-21 (A-B)	"	33 "	0.182	"	"	"	"	
-22 (A-B)	"	36 "	0.167	"	"	"	"	
-23 (A-B)	"	39 "	0.154	"	"	"	"	
-24 (A-B)	"	43 "	0.140	"	"	"	"	
-25 (A-B)	"	47 "	0.128	"	"	"	"	
-26 (A-B)	"	51 "	0.118	"	"	"	"	
-27 (A-B)	"	56 "	0.107	"	"	"	"	
-28 (A-B)	"	62 "	0.097	"	"	"	"	
-29 (A-B)	"	68 "	0.088	"	"	"	"	
-30 (A-B)	"	75 "	0.080	"	"	"	"	
-31 (A-B)	"	82 "	0.073	"	"	"	"	
-32 (A-B)	"	91 "	0.066	"	"	"	"	
-33 (A-B)	"	100 "	0.060	"	"	"	"	
-34 (A-B)	"	110 "	0.055	"	"	"	"	
-35 (A-B)	"	115 "	0.052	"	"	"	"	
-36 (A-B)	"	120 "	0.050	"	"	"	"	
-37 (A-B)	"	130 "	0.046	"	"	"	"	
-38 (A-B)	"	150 "	0.040	"	"	"	"	
-39 (A-B)	"	180 "	0.033	"	"	"	"	
-40 (A-B)	"	200 "	0.030	440	"	"	"	
-41 (A-B)	"	220 "	0.027	440	"	"	"	
-42 (A-B)	"	240 "	0.025	440	"	"	"	
-43 (A-B)	"	270 "	0.022	580	"	"	"	
-44 (A-B)	"	300 "	0.020	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/43								
-01 (A-B)	115, 400 Hz	6 CT	1.500	325	9	5	130°C	See figure 101-1
-02 (A-B)	"	6.3 "	1.430	"	"	"	"	A and B - 1.09 in. max
-03 (A-B)	"	7 "	1.286	"	"	"	"	C - 1.03 in. max
-04 (A-B)	"	7.5 "	1.200	"	"	"	"	D and E - .800 in.
-05 (A-B)	"	8 "	1.125	"	"	"	"	F and G - .600 in.
-06 (A-B)	"	9 "	1.000	"	"	"	"	H - .75 in. dia
-07 (A-B)	"	10 "	0.900	"	"	"	"	J - .138
-08 (A-B)	"	11 "	0.818	"	"	"	"	
-09 (A-B)	"	12 "	0.750	"	"	"	"	
-10 (A-B)	"	12.6 "	0.715	"	"	"	"	
-11 (A-B)	"	13 "	0.692	"	"	"	"	
-12 (A-B)	"	15 "	0.600	"	"	"	"	
-13 (A-B)	"	16 "	0.563	"	"	"	"	
-14 (A-B)	"	18 "	0.500	"	"	"	"	
-15 (A-B)	"	20 "	0.450	"	"	"	"	
-16 (A-B)	"	22 "	0.409	"	"	"	"	
-17 (A-B)	"	24 "	0.375	"	"	"	"	
-18 (A-B)	"	26 "	0.346	"	"	"	"	
-19 (A-B)	"	28 "	0.321	"	"	"	"	
-20 (A-B)	"	30 "	0.300	"	"	"	"	
-21 (A-B)	"	33 "	0.273	"	"	"	"	
-22 (A-B)	"	36 "	0.250	"	"	"	"	
-23 (A-B)	"	39 "	0.231	"	"	"	"	
-24 (A-B)	"	43 "	0.209	"	"	"	"	
-25 (A-B)	"	47 "	0.191	"	"	"	"	
-26 (A-B)	"	51 "	0.176	"	"	"	"	
-27 (A-B)	"	56 "	0.161	"	"	"	"	
-28 (A-B)	"	62 "	0.145	"	"	"	"	
-29 (A-B)	"	68 "	0.132	"	"	"	"	
-30 (A-B)	"	75 "	0.120	"	"	"	"	
-31 (A-B)	"	82 "	0.110	"	"	"	"	
-32 (A-B)	"	91 "	0.099	"	"	"	"	
-33 (A-B)	"	100 "	0.090	"	"	"	"	
-34 (A-B)	"	110 "	0.082	"	"	"	"	
-35 (A-B)	"	115 "	0.078	"	"	"	"	
-36 (A-B)	"	120 "	0.075	"	"	"	"	
-37 (A-B)	"	130 "	0.069	"	"	"	"	
-38 (A-B)	"	150 "	0.060	"	"	"	"	
-39 (A-B)	"	180 "	0.050	"	"	"	"	
-40 (A-B)	"	200 "	0.045	440	"	"	"	
-41 (A-B)	"	220 "	0.041	440	"	"	"	
-42 (A-B)	"	240 "	0.038	440	"	"	"	
-43 (A-B)	"	270 "	0.033	580	"	"	"	
-44 (A-B)	"	300 "	0.030	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/44								
-01 (A-B)	115, 400 Hz	6 CT	2.667	325	16	5	130°C	See figure 101-1
-02 (A-B)	"	6.3 "	2.540	"	"	"	"	A and B - 1.40 in. max
-03 (A-B)	"	7 "	2.286	"	"	"	"	C - .97 in. max
-04 (A-B)	"	7.5 "	2.133	"	"	"	"	D and E - 1.100 in.
-05 (A-B)	"	8 "	2.000	"	"	"	"	F and G - .900 in.
-06 (A-B)	"	9 "	1.778	"	"	"	"	H - 1.00 in. dia
-07 (A-B)	"	10 "	1.600	"	"	"	"	J - .164
-08 (A-B)	"	11 "	1.455	"	"	"	"	
-09 (A-B)	"	12 "	1.333	"	"	"	"	
-10 (A-B)	"	12.6 "	1.270	"	"	"	"	
-11 (A-B)	"	13 "	1.231	"	"	"	"	
-12 (A-B)	"	15 "	1.067	"	"	"	"	
-13 (A-B)	"	16 "	1.000	"	"	"	"	
-14 (A-B)	"	18 "	0.889	"	"	"	"	
-15 (A-B)	"	20 "	0.800	"	"	"	"	
-16 (A-B)	"	22 "	0.727	"	"	"	"	
-17 (A-B)	"	24 "	0.667	"	"	"	"	
-18 (A-B)	"	26 "	0.615	"	"	"	"	
-19 (A-B)	"	28 "	0.571	"	"	"	"	
-20 (A-B)	"	30 "	0.533	"	"	"	"	
-21 (A-B)	"	33 "	0.485	"	"	"	"	
-22 (A-B)	"	36 "	0.444	"	"	"	"	
-23 (A-B)	"	39 "	0.410	"	"	"	"	
-24 (A-B)	"	43 "	0.372	"	"	"	"	
-25 (A-B)	"	47 "	0.340	"	"	"	"	
-26 (A-B)	"	51 "	0.314	"	"	"	"	
-27 (A-B)	"	56 "	0.286	"	"	"	"	
-28 (A-B)	"	62 "	0.258	"	"	"	"	
-29 (A-B)	"	68 "	0.236	"	"	"	"	
-30 (A-B)	"	75 "	0.213	"	"	"	"	
-31 (A-B)	"	82 "	0.195	"	"	"	"	
-32 (A-B)	"	91 "	0.176	"	"	"	"	
-33 (A-B)	"	100 "	0.160	"	"	"	"	
-34 (A-B)	"	110 "	0.145	"	"	"	"	
-35 (A-B)	"	115 "	0.139	"	"	"	"	
-36 (A-B)	"	120 "	0.133	"	"	"	"	
-37 (A-B)	"	130 "	0.123	"	"	"	"	
-38 (A-B)	"	150 "	0.106	"	"	"	"	
-39 (A-B)	"	180 "	0.089	"	"	"	"	
-40 (A-B)	"	200 "	0.080	440	"	"	"	
-41 (A-B)	"	220 "	0.073	440	"	"	"	
-42 (A-B)	"	240 "	0.067	440	"	"	"	
-43 (A-B)	"	270 "	0.059	580	"	"	"	
-44 (A-B)	"	300 "	0.053	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/45								
-01 (A-B)	115, 400 Hz	6 CT	2.667	325	16	5	130°C	See figure 101-1
-02 (A-B)	"	6.3 "	2.540	"	"	"	"	A and B - 1.40 in. max
-03 (A-B)	"	7 "	2.286	"	"	"	"	C - .97 in. max
-04 (A-B)	"	7.5 "	2.133	"	"	"	"	D and E - 1.100 in.
-05 (A-B)	"	8 "	2.000	"	"	"	"	F and G - .900 in.
-06 (A-B)	"	9 "	1.778	"	"	"	"	H - 1.00 in. dia
-07 (A-B)	"	10 "	1.600	"	"	"	"	J - .164
-08 (A-B)	"	11 "	1.455	"	"	"	"	
-09 (A-B)	"	12 "	1.333	"	"	"	"	
-10 (A-B)	"	12.6 "	1.270	"	"	"	"	
-11 (A-B)	"	13 "	1.231	"	"	"	"	
-12 (A-B)	"	15 "	1.067	"	"	"	"	
-13 (A-B)	"	16 "	1.000	"	"	"	"	
-14 (A-B)	"	18 "	0.889	"	"	"	"	
-15 (A-B)	"	20 "	0.800	"	"	"	"	
-16 (A-B)	"	22 "	0.727	"	"	"	"	
-17 (A-B)	"	24 "	0.667	"	"	"	"	
-18 (A-B)	"	26 "	0.615	"	"	"	"	
-19 (A-B)	"	28 "	0.571	"	"	"	"	
-20 (A-B)	"	30 "	0.533	"	"	"	"	
-21 (A-B)	"	33 "	0.485	"	"	"	"	
-22 (A-B)	"	36 "	0.444	"	"	"	"	
-23 (A-B)	"	39 "	0.410	"	"	"	"	
-24 (A-B)	"	43 "	0.372	"	"	"	"	
-25 (A-B)	"	47 "	0.340	"	"	"	"	
-26 (A-B)	"	51 "	0.314	"	"	"	"	
-27 (A-B)	"	56 "	0.286	"	"	"	"	
-28 (A-B)	"	62 "	0.258	"	"	"	"	
-29 (A-B)	"	68 "	0.236	"	"	"	"	
-30 (A-B)	"	75 "	0.213	"	"	"	"	
-31 (A-B)	"	82 "	0.195	"	"	"	"	
-32 (A-B)	"	91 "	0.176	"	"	"	"	
-33 (A-B)	"	100 "	0.160	"	"	"	"	
-34 (A-B)	"	110 "	0.145	"	"	"	"	
-35 (A-B)	"	115 "	0.139	"	"	"	"	
-36 (A-B)	"	120 "	0.133	"	"	"	"	
-37 (A-B)	"	130 "	0.123	"	"	"	"	
-38 (A-B)	"	150 "	0.106	"	"	"	"	
-39 (A-B)	"	180 "	0.089	"	"	"	"	
-40 (A-B)	"	200 "	0.080	440	"	"	"	
-41 (A-B)	"	220 "	0.073	440	"	"	"	
-42 (A-B)	"	240 "	0.067	440	"	"	"	
-43 (A-B)	"	270 "	0.059	580	"	"	"	
-44 (A-B)	"	300 "	0.053	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/46								
-01 (A-B)	115, 400 Hz	6 CT	4.167	325	25	5	130°C	See figure 101-1
-02 (A-B)	"	6.3 "	3.968	"	"	"	"	A and B - 1.40 in. max
-03 (A-B)	"	7 "	3.571	"	"	"	"	C - 1.20 in. max
-04 (A-B)	"	7.5 "	3.333	"	"	"	"	D and E - 1.100 in.
-05 (A-B)	"	8 "	3.125	"	"	"	"	F and G - .900 in.
-06 (A-B)	"	9 "	2.778	"	"	"	"	H - 1.00 in. dia
-07 (A-B)	"	10 "	2.500	"	"	"	"	J - .164
-08 (A-B)	"	11 "	2.273	"	"	"	"	
-09 (A-B)	"	12 "	2.083	"	"	"	"	
-10 (A-B)	"	12.6 "	1.984	"	"	"	"	
-11 (A-B)	"	13 "	1.923	"	"	"	"	
-12 (A-B)	"	15 "	1.667	"	"	"	"	
-13 (A-B)	"	16 "	1.563	"	"	"	"	
-14 (A-B)	"	18 "	1.389	"	"	"	"	
-15 (A-B)	"	20 "	1.250	"	"	"	"	
-16 (A-B)	"	22 "	1.136	"	"	"	"	
-17 (A-B)	"	24 "	1.042	"	"	"	"	
-18 (A-B)	"	26 "	0.962	"	"	"	"	
-19 (A-B)	"	28 "	0.893	"	"	"	"	
-20 (A-B)	"	30 "	0.833	"	"	"	"	
-21 (A-B)	"	33 "	0.758	"	"	"	"	
-22 (A-B)	"	36 "	0.694	"	"	"	"	
-23 (A-B)	"	39 "	0.641	"	"	"	"	
-24 (A-B)	"	43 "	0.581	"	"	"	"	
-25 (A-B)	"	47 "	0.532	"	"	"	"	
-26 (A-B)	"	51 "	0.490	"	"	"	"	
-27 (A-B)	"	56 "	0.446	"	"	"	"	
-28 (A-B)	"	62 "	0.403	"	"	"	"	
-29 (A-B)	"	68 "	0.367	"	"	"	"	
-30 (A-B)	"	75 "	0.333	"	"	"	"	
-31 (A-B)	"	82 "	0.305	"	"	"	"	
-32 (A-B)	"	91 "	0.275	"	"	"	"	
-33 (A-B)	"	100 "	0.250	"	"	"	"	
-34 (A-B)	"	110 "	0.227	"	"	"	"	
-35 (A-B)	"	115 "	0.218	"	"	"	"	
-36 (A-B)	"	120 "	0.208	"	"	"	"	
-37 (A-B)	"	130 "	0.192	"	"	"	"	
-38 (A-B)	"	150 "	0.166	"	"	"	"	
-39 (A-B)	"	180 "	0.139	"	"	"	"	
-40 (A-B)	"	200 "	0.125	440	"	"	"	
-41 (A-B)	"	220 "	0.113	440	"	"	"	
-42 (A-B)	"	240 "	0.104	440	"	"	"	
-43 (A-B)	"	270 "	0.093	580	"	"	"	
-44 (A-B)	"	300 "	0.083	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/47								
-01 (A-B)	115, 400 Hz	6 CT	4.167	325	25	5	130°C	See figure 101-1
-02 (A-B)	"	6.3 "	3.968	"	"	"	"	A and B - 1.40 in. max
-03 (A-B)	"	7 "	3.571	"	"	"	"	C - 1.20 in. max
-04 (A-B)	"	7.5 "	3.333	"	"	"	"	D and E - 1.100 in.
-05 (A-B)	"	8 "	3.125	"	"	"	"	F and G - .900 in.
-06 (A-B)	"	9 "	2.778	"	"	"	"	H - 1.00 in. dia
-07 (A-B)	"	10 "	2.500	"	"	"	"	J - .164
-08 (A-B)	"	11 "	2.273	"	"	"	"	
-09 (A-B)	"	12 "	2.083	"	"	"	"	
-10 (A-B)	"	12.6 "	1.984	"	"	"	"	
-11 (A-B)	"	13 "	1.923	"	"	"	"	
-12 (A-B)	"	15 "	1.667	"	"	"	"	
-13 (A-B)	"	16 "	1.563	"	"	"	"	
-14 (A-B)	"	18 "	1.389	"	"	"	"	
-15 (A-B)	"	20 "	1.250	"	"	"	"	
-16 (A-B)	"	22 "	1.136	"	"	"	"	
-17 (A-B)	"	24 "	1.042	"	"	"	"	
-18 (A-B)	"	26 "	0.962	"	"	"	"	
-19 (A-B)	"	28 "	0.893	"	"	"	"	
-20 (A-B)	"	30 "	0.833	"	"	"	"	
-21 (A-B)	"	33 "	0.758	"	"	"	"	
-22 (A-B)	"	36 "	0.694	"	"	"	"	
-23 (A-B)	"	39 "	0.641	"	"	"	"	
-24 (A-B)	"	43 "	0.581	"	"	"	"	
-25 (A-B)	"	47 "	0.532	"	"	"	"	
-26 (A-B)	"	51 "	0.490	"	"	"	"	
-27 (A-B)	"	56 "	0.446	"	"	"	"	
-28 (A-B)	"	62 "	0.403	"	"	"	"	
-29 (A-B)	"	68 "	0.367	"	"	"	"	
-30 (A-B)	"	75 "	0.333	"	"	"	"	
-31 (A-B)	"	82 "	0.305	"	"	"	"	
-32 (A-B)	"	91 "	0.275	"	"	"	"	
-33 (A-B)	"	100 "	0.250	"	"	"	"	
-34 (A-B)	"	110 "	0.227	"	"	"	"	
-35 (A-B)	"	115 "	0.218	"	"	"	"	
-36 (A-B)	"	120 "	0.208	"	"	"	"	
-37 (A-B)	"	130 "	0.192	"	"	"	"	
-38 (A-B)	"	150 "	0.166	"	"	"	"	
-39 (A-B)	"	180 "	0.139	"	"	"	"	
-40 (A-B)	"	200 "	0.125	440	"	"	"	
-41 (A-B)	"	220 "	0.113	440	"	"	"	
-42 (A-B)	"	240 "	0.104	440	"	"	"	
-43 (A-B)	"	270 "	0.093	580	"	"	"	
-44 (A-B)	"	300 "	0.083	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/48								
-01 (A-B)	115, 400 Hz	6 CT	0.250	325	1.5	5	130°C	See figure 101-2
-02 (A-B)	"	6.3 "	0.238	"	"	"	"	A - 1.000 in.
-03 (A-B)	"	7 "	0.214	"	"	"	"	B - .469 in.
-04 (A-B)	"	7.5 "	0.200	"	"	"	"	C - .750 in.
-05 (A-B)	"	8 "	0.188	"	"	"	"	D - .312 in. max
-06 (A-B)	"	9 "	0.167	"	"	"	"	E - .138-32UNC-2A
-07 (A-B)	"	10 "	0.150	"	"	"	"	
-08 (A-B)	"	11 "	0.136	"	"	"	"	
-09 (A-B)	"	12 "	0.125	"	"	"	"	
-10 (A-B)	"	12.6 "	0.119	"	"	"	"	
-11 (A-B)	"	13 "	0.115	"	"	"	"	
-12 (A-B)	"	15 "	0.100	"	"	"	"	
-13 (A-B)	"	16 "	0.094	"	"	"	"	
-14 (A-B)	"	18 "	0.083	"	"	"	"	
-15 (A-B)	"	20 "	0.075	"	"	"	"	
-16 (A-B)	"	22 "	0.068	"	"	"	"	
-17 (A-B)	"	24 "	0.063	"	"	"	"	
-18 (A-B)	"	26 "	0.058	"	"	"	"	
-19 (A-B)	"	28 "	0.053	"	"	"	"	
-20 (A-B)	"	30 "	0.050	"	"	"	"	
-21 (A-B)	"	33 "	0.045	"	"	"	"	
-22 (A-B)	"	36 "	0.042	"	"	"	"	
-23 (A-B)	"	39 "	0.038	"	"	"	"	
-24 (A-B)	"	43 "	0.035	"	"	"	"	
-25 (A-B)	"	47 "	0.032	"	"	"	"	
-26 (A-B)	"	51 "	0.029	"	"	"	"	
-27 (A-B)	"	56 "	0.027	"	"	"	"	
-28 (A-B)	"	62 "	0.024	"	"	"	"	
-29 (A-B)	"	68 "	0.022	"	"	"	"	
-30 (A-B)	"	75 "	0.020	"	"	"	"	
-31 (A-B)	"	82 "	0.018	"	"	"	"	
-32 (A-B)	"	91 "	0.016	"	"	"	"	
-33 (A-B)	"	100 "	0.015	"	"	"	"	
-34 (A-B)	"	110 "	0.014	"	"	"	"	
-35 (A-B)	"	115 "	0.013	"	"	"	"	
-36 (A-B)	"	120 "	0.0125	"	"	"	"	
-37 (A-B)	"	130 "	0.0115	"	"	"	"	
-38 (A-B)	"	150 "	0.010	"	"	"	"	
-39 (A-B)	"	180 "	0.0085	"	"	"	"	
-40 (A-B)	"	200 "	0.0075	440	"	"	"	
-41 (A-B)	"	220 "	0.007	440	"	"	"	
-42 (A-B)	"	240 "	0.006	440	"	"	"	
-43 (A-B)	"	270 "	0.0055	580	"	"	"	
-44 (A-B)	"	300 "	0.005	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/49								
-01 (A-B)	115, 400 Hz	6 CT	0.250	325	1.5	5	130°C	See figure 101-2
-02 (A-B)	"	6.3 "	0.238	"	"	"	"	A - 1.000 in.
-03 (A-B)	"	7 "	0.214	"	"	"	"	B - .594 in.
-04 (A-B)	"	7.5 "	0.200	"	"	"	"	C - .750 in.
-05 (A-B)	"	8 "	0.188	"	"	"	"	D - .312 in. max
-06 (A-B)	"	9 "	0.167	"	"	"	"	E - .138-32UNC-2A
-07 (A-B)	"	10 "	0.150	"	"	"	"	
-08 (A-B)	"	11 "	0.136	"	"	"	"	
-09 (A-B)	"	12 "	0.125	"	"	"	"	
-10 (A-B)	"	12.6 "	0.119	"	"	"	"	
-11 (A-B)	"	13 "	0.115	"	"	"	"	
-12 (A-B)	"	15 "	0.100	"	"	"	"	
-13 (A-B)	"	16 "	0.094	"	"	"	"	
-14 (A-B)	"	18 "	0.083	"	"	"	"	
-15 (A-B)	"	20 "	0.075	"	"	"	"	
-16 (A-B)	"	22 "	0.068	"	"	"	"	
-17 (A-B)	"	24 "	0.063	"	"	"	"	
-18 (A-B)	"	26 "	0.058	"	"	"	"	
-19 (A-B)	"	28 "	0.053	"	"	"	"	
-20 (A-B)	"	30 "	0.050	"	"	"	"	
-21 (A-B)	"	33 "	0.045	"	"	"	"	
-22 (A-B)	"	36 "	0.042	"	"	"	"	
-23 (A-B)	"	39 "	0.038	"	"	"	"	
-24 (A-B)	"	43 "	0.035	"	"	"	"	
-25 (A-B)	"	47 "	0.032	"	"	"	"	
-26 (A-B)	"	51 "	0.029	"	"	"	"	
-27 (A-B)	"	56 "	0.027	"	"	"	"	
-28 (A-B)	"	62 "	0.024	"	"	"	"	
-29 (A-B)	"	68 "	0.022	"	"	"	"	
-30 (A-B)	"	75 "	0.020	"	"	"	"	
-31 (A-B)	"	82 "	0.018	"	"	"	"	
-32 (A-B)	"	91 "	0.016	"	"	"	"	
-33 (A-B)	"	100 "	0.015	"	"	"	"	
-34 (A-B)	"	110 "	0.014	"	"	"	"	
-35 (A-B)	"	115 "	0.013	"	"	"	"	
-36 (A-B)	"	120 "	0.0125	"	"	"	"	
-37 (A-B)	"	130 "	0.0115	"	"	"	"	
-38 (A-B)	"	150 "	0.010	"	"	"	"	
-39 (A-B)	"	180 "	0.0085	"	"	"	"	
-40 (A-B)	"	200 "	0.0075	440	"	"	"	
-41 (A-B)	"	220 "	0.007	440	"	"	"	
-42 (A-B)	"	240 "	0.006	440	"	"	"	
-43 (A-B)	"	270 "	0.0055	580	"	"	"	
-44 (A-B)	"	300 "	0.005	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/50								
-01 (A-B)	115, 400 Hz	6 CT	0.500	325	3.0	4	130°C	See figure 101-2
-02 (A-B)	"	6.3 "	0.476	"	"	"	"	A - 1.000 in.
-03 (A-B)	"	7 "	0.429	"	"	"	"	B - .594 in.
-04 (A-B)	"	7.5 "	0.400	"	"	"	"	C - .750 in.
-05 (A-B)	"	8 "	0.375	"	"	"	"	D - .312 in. max
-06 (A-B)	"	9 "	0.333	"	"	"	"	E - .138-32 UNC-2A
-07 (A-B)	"	10 "	0.300	"	"	"	"	
-08 (A-B)	"	11 "	0.273	"	"	"	"	
-09 (A-B)	"	12 "	0.250	"	"	"	"	
-10 (A-B)	"	12.6 "	0.238	"	"	"	"	
-11 (A-B)	"	13 "	0.231	"	"	"	"	
-12 (A-B)	"	15 "	0.200	"	"	"	"	
-13 (A-B)	"	16 "	0.188	"	"	"	"	
-14 (A-B)	"	18 "	0.167	"	"	"	"	
-15 (A-B)	"	20 "	0.150	"	"	"	"	
-16 (A-B)	"	22 "	0.136	"	"	"	"	
-17 (A-B)	"	24 "	0.125	"	"	"	"	
-18 (A-B)	"	26 "	0.115	"	"	"	"	
-19 (A-B)	"	28 "	0.107	"	"	"	"	
-20 (A-B)	"	30 "	0.100	"	"	"	"	
-21 (A-B)	"	33 "	0.091	"	"	"	"	
-22 (A-B)	"	36 "	0.083	"	"	"	"	
-23 (A-B)	"	39 "	0.077	"	"	"	"	
-24 (A-B)	"	43 "	0.070	"	"	"	"	
-25 (A-B)	"	47 "	0.064	"	"	"	"	
-26 (A-B)	"	51 "	0.059	"	"	"	"	
-27 (A-B)	"	56 "	0.054	"	"	"	"	
-28 (A-B)	"	62 "	0.048	"	"	"	"	
-29 (A-B)	"	68 "	0.044	"	"	"	"	
-30 (A-B)	"	75 "	0.040	"	"	"	"	
-31 (A-B)	"	82 "	0.037	"	"	"	"	
-32 (A-B)	"	91 "	0.033	"	"	"	"	
-33 (A-B)	"	100 "	0.030	"	"	"	"	
-34 (A-B)	"	110 "	0.027	"	"	"	"	
-35 (A-B)	"	115 "	0.026	"	"	"	"	
-36 (A-B)	"	120 "	0.025	"	"	"	"	
-37 (A-B)	"	130 "	0.023	"	"	"	"	
-38 (A-B)	"	150 "	0.020	"	"	"	"	
-39 (A-B)	"	180 "	0.017	"	"	"	"	
-40 (A-B)	"	200 "	0.015	440	"	"	"	
-41 (A-B)	"	220 "	0.014	440	"	"	"	
-42 (A-B)	"	240 "	0.013	440	"	"	"	
-43 (A-B)	"	270 "	0.011	580	"	"	"	
-44 (A-B)	"	300 "	0.010	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/51								
-01 (A-B)	115, 400 Hz	6 CT	0.500	325	3.0	4	130°C	See figure 101-2
-02 (A-B)	"	6.3 "	0.476	"	"	"	"	A - 1.000 in.
-03 (A-B)	"	7 "	0.429	"	"	"	"	B - .812 in.
-04 (A-B)	"	7.5 "	0.400	"	"	"	"	C - .750 in.
-05 (A-B)	"	8 "	0.375	"	"	"	"	D - .312 in. max
-06 (A-B)	"	9 "	0.333	"	"	"	"	E - .138-32 UNC-2A
-07 (A-B)	"	10 "	0.300	"	"	"	"	
-08 (A-B)	"	11 "	0.273	"	"	"	"	
-09 (A-B)	"	12 "	0.250	"	"	"	"	
-10 (A-B)	"	12.6 "	0.238	"	"	"	"	
-11 (A-B)	"	13 "	0.231	"	"	"	"	
-12 (A-B)	"	15 "	0.200	"	"	"	"	
-13 (A-B)	"	16 "	0.188	"	"	"	"	
-14 (A-B)	"	18 "	0.167	"	"	"	"	
-15 (A-B)	"	20 "	0.150	"	"	"	"	
-16 (A-B)	"	22 "	0.136	"	"	"	"	
-17 (A-B)	"	24 "	0.125	"	"	"	"	
-18 (A-B)	"	26 "	0.115	"	"	"	"	
-19 (A-B)	"	28 "	0.107	"	"	"	"	
-20 (A-B)	"	30 "	0.100	"	"	"	"	
-21 (A-B)	"	33 "	0.091	"	"	"	"	
-22 (A-B)	"	36 "	0.083	"	"	"	"	
-23 (A-B)	"	39 "	0.077	"	"	"	"	
-24 (A-B)	"	43 "	0.070	"	"	"	"	
-25 (A-B)	"	47 "	0.064	"	"	"	"	
-26 (A-B)	"	51 "	0.059	"	"	"	"	
-27 (A-B)	"	56 "	0.054	"	"	"	"	
-28 (A-B)	"	62 "	0.048	"	"	"	"	
-29 (A-B)	"	68 "	0.044	"	"	"	"	
-30 (A-B)	"	75 "	0.040	"	"	"	"	
-31 (A-B)	"	82 "	0.037	"	"	"	"	
-32 (A-B)	"	91 "	0.033	"	"	"	"	
-33 (A-B)	"	100 "	0.030	"	"	"	"	
-34 (A-B)	"	110 "	0.027	"	"	"	"	
-35 (A-B)	"	115 "	0.026	"	"	"	"	
-36 (A-B)	"	120 "	0.025	"	"	"	"	
-37 (A-B)	"	130 "	0.023	"	"	"	"	
-38 (A-B)	"	150 "	0.020	"	"	"	"	
-39 (A-B)	"	180 "	0.017	"	"	"	"	
-40 (A-B)	"	200 "	0.015	440	"	"	"	
-41 (A-B)	"	220 "	0.014	440	"	"	"	
-42 (A-B)	"	240 "	0.013	440	"	"	"	
-43 (A-B)	"	270 "	0.011	580	"	"	"	
-44 (A-B)	"	300 "	0.010	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/52								
-01 (A-B)	115, 400 Hz	6 CT	1.000	325	6	4	130°C	See figure 101-2
-02 (A-B)	"	6.3 "	0.953	"	"	"	"	A - 1.000 in.
-03 (A-B)	"	7 "	0.857	"	"	"	"	B - .812 in.
-04 (A-B)	"	7.5 "	0.800	"	"	"	"	C - .750 in.
-05 (A-B)	"	8 "	0.750	"	"	"	"	D - .312 in. max
-06 (A-B)	"	9 "	0.667	"	"	"	"	E - .138-32 UNC-2A
-07 (A-B)	"	10 "	0.600	"	"	"	"	
-08 (A-B)	"	11 "	0.545	"	"	"	"	
-09 (A-B)	"	12 "	0.500	"	"	"	"	
-10 (A-B)	"	12.6 "	0.476	"	"	"	"	
-11 (A-B)	"	13 "	0.462	"	"	"	"	
-12 (A-B)	"	15 "	0.400	"	"	"	"	
-13 (A-B)	"	16 "	0.375	"	"	"	"	
-14 (A-B)	"	18 "	0.333	"	"	"	"	
-15 (A-B)	"	20 "	0.300	"	"	"	"	
-16 (A-B)	"	22 "	0.272	"	"	"	"	
-17 (A-B)	"	24 "	0.250	"	"	"	"	
-18 (A-B)	"	26 "	0.230	"	"	"	"	
-19 (A-B)	"	28 "	0.214	"	"	"	"	
-20 (A-B)	"	30 "	0.200	"	"	"	"	
-21 (A-B)	"	33 "	0.182	"	"	"	"	
-22 (A-B)	"	36 "	0.167	"	"	"	"	
-23 (A-B)	"	39 "	0.154	"	"	"	"	
-24 (A-B)	"	43 "	0.140	"	"	"	"	
-25 (A-B)	"	47 "	0.128	"	"	"	"	
-26 (A-B)	"	51 "	0.118	"	"	"	"	
-27 (A-B)	"	56 "	0.107	"	"	"	"	
-28 (A-B)	"	62 "	0.097	"	"	"	"	
-29 (A-B)	"	68 "	0.088	"	"	"	"	
-30 (A-B)	"	75 "	0.080	"	"	"	"	
-31 (A-B)	"	82 "	0.073	"	"	"	"	
-32 (A-B)	"	91 "	0.066	"	"	"	"	
-33 (A-B)	"	100 "	0.060	"	"	"	"	
-34 (A-B)	"	110 "	0.055	"	"	"	"	
-35 (A-B)	"	115 "	0.052	"	"	"	"	
-36 (A-B)	"	120 "	0.050	"	"	"	"	
-37 (A-B)	"	130 "	0.046	"	"	"	"	
-38 (A-B)	"	150 "	0.040	"	"	"	"	
-39 (A-B)	"	180 "	0.033	"	"	"	"	
-40 (A-B)	"	200 "	0.030	440	"	"	"	
-41 (A-B)	"	220 "	0.027	440	"	"	"	
-42 (A-B)	"	240 "	0.025	440	"	"	"	
-43 (A-B)	"	270 "	0.022	580	"	"	"	
-44 (A-B)	"	300 "	0.020	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/53								
-01 (A-B)	115, 400 Hz	6 CT	1.000	325	6	4	130°C	See figure 101-2
-02 (A-B)	"	6.3 "	0.953	"	"	"	"	A - 1.000 in.
-03 (A-B)	"	7 "	0.857	"	"	"	"	B - 1.062 in.
-04 (A-B)	"	7.5 "	0.800	"	"	"	"	C - .750 in.
-05 (A-B)	"	8 "	0.750	"	"	"	"	D - .312 in. max
-06 (A-B)	"	9 "	0.667	"	"	"	"	E - .138-32 UNC-2A
-07 (A-B)	"	10 "	0.600	"	"	"	"	
-08 (A-B)	"	11 "	0.545	"	"	"	"	
-09 (A-B)	"	12 "	0.500	"	"	"	"	
-10 (A-B)	"	12.6 "	0.476	"	"	"	"	
-11 (A-B)	"	13 "	0.462	"	"	"	"	
-12 (A-B)	"	15 "	0.400	"	"	"	"	
-13 (A-B)	"	16 "	0.375	"	"	"	"	
-14 (A-B)	"	18 "	0.333	"	"	"	"	
-15 (A-B)	"	20 "	0.300	"	"	"	"	
-16 (A-B)	"	22 "	0.272	"	"	"	"	
-17 (A-B)	"	24 "	0.250	"	"	"	"	
-18 (A-B)	"	26 "	0.230	"	"	"	"	
-19 (A-B)	"	28 "	0.214	"	"	"	"	
-20 (A-B)	"	30 "	0.200	"	"	"	"	
-21 (A-B)	"	33 "	0.182	"	"	"	"	
-22 (A-B)	"	36 "	0.167	"	"	"	"	
-23 (A-B)	"	39 "	0.154	"	"	"	"	
-24 (A-B)	"	43 "	0.140	"	"	"	"	
-25 (A-B)	"	47 "	0.128	"	"	"	"	
-26 (A-B)	"	51 "	0.118	"	"	"	"	
-27 (A-B)	"	56 "	0.107	"	"	"	"	
-28 (A-B)	"	62 "	0.097	"	"	"	"	
-29 (A-B)	"	68 "	0.088	"	"	"	"	
-30 (A-B)	"	75 "	0.080	"	"	"	"	
-31 (A-B)	"	82 "	0.073	"	"	"	"	
-32 (A-B)	"	91 "	0.066	"	"	"	"	
-33 (A-B)	"	100 "	0.060	"	"	"	"	
-34 (A-B)	"	110 "	0.055	"	"	"	"	
-35 (A-B)	"	115 "	0.052	"	"	"	"	
-36 (A-B)	"	120 "	0.050	"	"	"	"	
-37 (A-B)	"	130 "	0.046	"	"	"	"	
-38 (A-B)	"	150 "	0.040	"	"	"	"	
-39 (A-B)	"	180 "	0.033	"	"	"	"	
-40 (A-B)	"	200 "	0.030	440	"	"	"	
-41 (A-B)	"	220 "	0.027	440	"	"	"	
-42 (A-B)	"	240 "	0.025	440	"	"	"	
-43 (A-B)	"	270 "	0.022	580	"	"	"	
-44 (A-B)	"	300 "	0.020	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/54								
-01 (A-B)	115, 400 Hz	6 CT	1.500	325	9	4	130°C	See figure 101-2
-02 (A-B)	"	6.3 "	1.430	"	"	"	"	A - 1.000 in.
-03 (A-B)	"	7 "	1.286	"	"	"	"	B - 1.062 in.
-04 (A-B)	"	7.5 "	1.200	"	"	"	"	C - .750 in.
-05 (A-B)	"	8 "	1.125	"	"	"	"	D - .312 in. max
-06 (A-B)	"	9 "	1.000	"	"	"	"	E - .138-32 UNC-2A
-07 (A-B)	"	10 "	0.900	"	"	"	"	
-08 (A-B)	"	11 "	0.818	"	"	"	"	
-09 (A-B)	"	12 "	0.750	"	"	"	"	
-10 (A-B)	"	12.6 "	0.715	"	"	"	"	
-11 (A-B)	"	13 "	0.692	"	"	"	"	
-12 (A-B)	"	15 "	0.600	"	"	"	"	
-13 (A-B)	"	16 "	0.563	"	"	"	"	
-14 (A-B)	"	18 "	0.500	"	"	"	"	
-15 (A-B)	"	20 "	0.450	"	"	"	"	
-16 (A-B)	"	22 "	0.409	"	"	"	"	
-17 (A-B)	"	24 "	0.375	"	"	"	"	
-18 (A-B)	"	26 "	0.346	"	"	"	"	
-19 (A-B)	"	28 "	0.321	"	"	"	"	
-20 (A-B)	"	30 "	0.300	"	"	"	"	
-21 (A-B)	"	33 "	0.273	"	"	"	"	
-22 (A-B)	"	36 "	0.250	"	"	"	"	
-23 (A-B)	"	39 "	0.231	"	"	"	"	
-24 (A-B)	"	43 "	0.209	"	"	"	"	
-25 (A-B)	"	47 "	0.191	"	"	"	"	
-26 (A-B)	"	51 "	0.176	"	"	"	"	
-27 (A-B)	"	56 "	0.161	"	"	"	"	
-28 (A-B)	"	62 "	0.145	"	"	"	"	
-29 (A-B)	"	68 "	0.132	"	"	"	"	
-30 (A-B)	"	75 "	0.120	"	"	"	"	
-31 (A-B)	"	82 "	0.110	"	"	"	"	
-32 (A-B)	"	91 "	0.099	"	"	"	"	
-33 (A-B)	"	100 "	0.090	"	"	"	"	
-34 (A-B)	"	110 "	0.082	"	"	"	"	
-35 (A-B)	"	115 "	0.078	"	"	"	"	
-36 (A-B)	"	120 "	0.075	"	"	"	"	
-37 (A-B)	"	130 "	0.069	"	"	"	"	
-38 (A-B)	"	150 "	0.060	"	"	"	"	
-39 (A-B)	"	180 "	0.050	"	"	"	"	
-40 (A-B)	"	200 "	0.045	440	"	"	"	
-41 (A-B)	"	220 "	0.041	440	"	"	"	
-42 (A-B)	"	240 "	0.038	440	"	"	"	
-43 (A-B)	"	270 "	0.033	580	"	"	"	
-44 (A-B)	"	300 "	0.030	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/55								
-01	115, 400 Hz	6 CT	2.667	325	16	4	130°C	See figure 101-2
-02	"	6.3 "	2.540	"	"	"	"	A - 1.375 in.
-03	"	7 "	2.286	"	"	"	"	B - 1.125 in
-04	"	7.5 "	2.133	"	"	"	"	C - 1.000 in.
-05	"	8 "	2.000	"	"	"	"	D - .312 in. max.
-06	"	9 "	1.778	"	"	"	"	E - .164-32 UNC-2A
-07	"	10 "	1.600	"	"	"	"	
-08	"	11 "	1.455	"	"	"	"	
-09	"	12 "	1.333	"	"	"	"	
-10	"	12.6 "	1.270	"	"	"	"	
-11	"	13 "	1.231	"	"	"	"	
-12	"	15 "	1.067	"	"	"	"	
-13	"	16 "	1.000	"	"	"	"	
-14	"	18 "	0.889	"	"	"	"	
-15	"	20 "	0.800	"	"	"	"	
-16	"	22 "	0.727	"	"	"	"	
-17	"	24 "	0.667	"	"	"	"	
-18	"	26 "	0.615	"	"	"	"	
-19	"	28 "	0.571	"	"	"	"	
-20	"	30 "	0.533	"	"	"	"	
-21	"	33 "	0.485	"	"	"	"	
-22	"	36 "	0.444	"	"	"	"	
-23	"	39 "	0.410	"	"	"	"	
-24	"	43 "	0.372	"	"	"	"	
-25	"	47 "	0.340	"	"	"	"	
-26	"	51 "	0.314	"	"	"	"	
-27	"	56 "	0.286	"	"	"	"	
-28	"	62 "	0.258	"	"	"	"	
-29	"	68 "	0.236	"	"	"	"	
-30	"	75 "	0.213	"	"	"	"	
-31	"	82 "	0.195	"	"	"	"	
-32	"	91 "	0.176	"	"	"	"	
-33	"	100 "	0.160	"	"	"	"	
-34	"	110 "	0.145	"	"	"	"	
-35	"	115 "	0.139	"	"	"	"	
-36	"	120 "	0.133	"	"	"	"	
-37	"	130 "	0.123	"	"	"	"	
-38	"	150 "	0.106	"	"	"	"	
-39	"	180 "	0.089	"	"	"	"	
-40	"	200 "	0.080	440	"	"	"	
-41	"	220 "	0.073	440	"	"	"	
-42	"	240 "	0.067	440	"	"	"	
-43	"	270 "	0.059	580	"	"	"	
-44	"	300 "	0.053	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/56								
-01	115, 400 Hz	6 CT	4.167	325	25	4	130°C	See figure 101-2
-02	"	6.3 "	3.968	"	"	"	"	A - 1.375 in.
-03	"	7 "	3.571	"	"	"	"	B - 1.375 in.
-04	"	7.5 "	3.333	"	"	"	"	C - 1.000 in.
-05	"	8 "	3.125	"	"	"	"	D - .312 in. max
-06	"	9 "	2.778	"	"	"	"	E - .164-32 UNC-2A
-07	"	10 "	2.500	"	"	"	"	
-08	"	11 "	2.273	"	"	"	"	
-09	"	12 "	2.083	"	"	"	"	
-10	"	12.6 "	1.984	"	"	"	"	
-11	"	13 "	1.923	"	"	"	"	
-12	"	15 "	1.667	"	"	"	"	
-13	"	16 "	1.563	"	"	"	"	
-14	"	18 "	1.389	"	"	"	"	
-15	"	20 "	1.250	"	"	"	"	
-16	"	22 "	1.136	"	"	"	"	
-17	"	24 "	1.042	"	"	"	"	
-18	"	26 "	0.962	"	"	"	"	
-19	"	28 "	0.893	"	"	"	"	
-20	"	30 "	0.833	"	"	"	"	
-21	"	33 "	0.758	"	"	"	"	
-22	"	36 "	0.694	"	"	"	"	
-23	"	39 "	0.641	"	"	"	"	
-24	"	43 "	0.581	"	"	"	"	
-25	"	47 "	0.532	"	"	"	"	
-26	"	51 "	0.490	"	"	"	"	
-27	"	56 "	0.446	"	"	"	"	
-28	"	62 "	0.403	"	"	"	"	
-29	"	68 "	0.367	"	"	"	"	
-30	"	75 "	0.333	"	"	"	"	
-31	"	82 "	0.305	"	"	"	"	
-32	"	91 "	0.275	"	"	"	"	
-33	"	100 "	0.250	"	"	"	"	
-34	"	110 "	0.227	"	"	"	"	
-35	"	115 "	0.218	"	"	"	"	
-36	"	120 "	0.208	"	"	"	"	
-37	"	130 "	0.192	"	"	"	"	
-38	"	150 "	0.166	"	"	"	"	
-39	"	180 "	0.139	"	"	"	"	
-40	"	200 "	0.125	440	"	"	"	
-41	"	220 "	0.113	440	"	"	"	
-42	"	240 "	0.104	440	"	"	"	
-43	"	270 "	0.093	580	"	"	"	
-44	"	300 "	0.083	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/57								
-01	115, 400 Hz	6 CT	8.333	325	50	4	130°C	See figure 101-4
-02	"	6.3 "	7.937	"	"	"	"	A - 2.000 in.
-03	"	7 "	7.143	"	"	"	"	B - 1.500 in.
-04	"	7.5 "	6.667	"	"	"	"	E - .138-32 UNC-2A
-05	"	8 "	6.250	"	"	"	"	
-06	"	9 "	5.556	"	"	"	"	
-07	"	10 "	5.000	"	"	"	"	
-08	"	11 "	4.545	"	"	"	"	
-09	"	12 "	4.167	"	"	"	"	
-10	"	12.6 "	3.968	"	"	"	"	
-11	"	13 "	3.846	"	"	"	"	
-12	"	15 "	3.333	"	"	"	"	
-13	"	16 "	3.125	"	"	"	"	
-14	"	18 "	2.778	"	"	"	"	
-15	"	20 "	2.500	"	"	"	"	
-16	"	22 "	2.273	"	"	"	"	
-17	"	24 "	2.083	"	"	"	"	
-18	"	26 "	1.923	"	"	"	"	
-19	"	28 "	1.786	"	"	"	"	
-20	"	30 "	1.667	"	"	"	"	
-21	"	33 "	1.515	"	"	"	"	
-22	"	36 "	1.389	"	"	"	"	
-23	"	39 "	1.282	"	"	"	"	
-24	"	43 "	1.163	"	"	"	"	
-25	"	47 "	1.064	"	"	"	"	
-26	"	51 "	0.980	"	"	"	"	
-27	"	56 "	0.893	"	"	"	"	
-28	"	62 "	0.806	"	"	"	"	
-29	"	68 "	0.735	"	"	"	"	
-30	"	75 "	0.667	"	"	"	"	
-31	"	82 "	0.610	"	"	"	"	
-32	"	91 "	0.549	"	"	"	"	
-33	"	100 "	0.500	"	"	"	"	
-34	"	110 "	0.455	"	"	"	"	
-35	"	115 "	0.435	"	"	"	"	
-36	"	120 "	0.417	"	"	"	"	
-37	"	130 "	0.385	"	"	"	"	
-38	"	150 "	0.333	"	"	"	"	
-39	"	180 "	0.278	"	"	"	"	
-40	"	200 "	0.250	440	"	"	"	
-41	"	220 "	0.227	440	"	"	"	
-42	"	240 "	0.208	440	"	"	"	
-43	"	270 "	0.185	580	"	"	"	
-44	"	300 "	0.167	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/58								
-01	115, 400 Hz	10 CT	7.50	325	50	4	130°C	See figure 101-4
-02	"	11 "	6.82	"	"	"	"	A - 2.000 in.
-03	"	12 "	6.25	"	"	"	"	B - 1.750 in.
-04	"	12.6 "	5.95	"	"	"	"	E - .138-32 UNC-2A
-05	"	13 "	5.77	"	"	"	"	
-06	"	15 "	5.00	"	"	"	"	
-07	"	16 "	4.69	"	"	"	"	
-08	"	18 "	4.17	"	"	"	"	
-09	"	20 "	3.75	"	"	"	"	
-10	"	22 "	3.41	"	"	"	"	
-11	"	24 "	3.13	"	"	"	"	
-12	"	26 "	2.89	"	"	"	"	
-13	"	28 "	2.68	"	"	"	"	
-14	"	30 "	2.50	"	"	"	"	
-15	"	33 "	2.27	"	"	"	"	
-16	"	36 "	2.08	"	"	"	"	
-17	"	39 "	1.92	"	"	"	"	
-18	"	43 "	1.74	"	"	"	"	
-19	"	47 "	1.60	"	"	"	"	
-20	"	51 "	1.47	"	"	"	"	
-21	"	56 "	1.34	"	"	"	"	
-22	"	62 "	1.21	"	"	"	"	
-23	"	68 "	1.10	"	"	"	"	
-24	"	75 "	1.00	"	"	"	"	
-25	"	82 "	1.92	"	"	"	"	
-26	"	91 "	0.82	"	"	"	"	
-27	"	100 "	0.75	"	"	"	"	
-28	"	110 "	0.68	"	"	"	"	
-29	"	115 "	0.65	"	"	"	"	
-30	"	120 "	0.63	"	"	"	"	
-31	"	130 "	0.58	"	"	"	"	
-32	"	150 "	0.50	"	"	"	"	
-33	"	180 "	0.42	"	"	"	"	
-34	"	200 "	0.38	440	"	"	"	
-35	"	220 "	0.34	440	"	"	"	
-36	"	240 "	0.31	440	"	"	"	
-37	"	270 "	0.28	580	"	"	"	
-38	"	300 "	0.25	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/59								
-01	115, 400 Hz	12 CT	8.33	325	100	4	130°C	See figure 101-4
-02	"	12.6 "	7.94	"	"	"	"	A - 2.250 in.
-03	"	13 "	7.69	"	"	"	"	B - 2.000 in.
-04	"	15 "	6.67	"	"	"	"	E - .138-32 UNC-2A
-05	"	16 "	6.25	"	"	"	"	
-06	"	18 "	5.56	"	"	"	"	
-07	"	20 "	5.00	"	"	"	"	
-08	"	22 "	4.55	"	"	"	"	
-09	"	24 "	4.17	"	"	"	"	
-10	"	26 "	3.85	"	"	"	"	
-11	"	28 "	3.57	"	"	"	"	
-12	"	30 "	3.33	"	"	"	"	
-13	"	33 "	3.03	"	"	"	"	
-14	"	36 "	2.78	"	"	"	"	
-15	"	39 "	2.56	"	"	"	"	
-16	"	43 "	2.33	"	"	"	"	
-17	"	47 "	2.13	"	"	"	"	
-18	"	51 "	1.96	"	"	"	"	
-19	"	56 "	1.79	"	"	"	"	
-20	"	62 "	1.61	"	"	"	"	
-21	"	68 "	1.47	"	"	"	"	
-22	"	75 "	1.33	"	"	"	"	
-23	"	82 "	1.22	"	"	"	"	
-24	"	91 "	1.10	"	"	"	"	
-25	"	100 "	1.00	"	"	"	"	
-26	"	110 "	0.91	"	"	"	"	
-27	"	115 "	0.87	"	"	"	"	
-28	"	120 "	0.83	"	"	"	"	
-29	"	130 "	0.77	"	"	"	"	
-30	"	150 "	0.67	"	"	"	"	
-31	"	180 "	0.56	"	"	"	"	
-32	"	200 "	0.50	440	"	"	"	
-33	"	220 "	0.45	440	"	"	"	
-34	"	240 "	0.42	440	"	"	"	
-35	"	270 "	0.37	580	"	"	"	
-36	"	300 "	0.33	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/60								
-01	115, 400 Hz	26 CT	9.62	325	250	4	130°C	See figure 101-3
-02	"	28 "	8.93	"	"	"	"	A - 2.875 in.
-03	"	30 "	8.33	"	"	"	"	B - 2.000 in.
-04	"	33 "	7.58	"	"	"	"	E - .138-32 UNC-2A
-05	"	36 "	6.94	"	"	"	"	(less terminal S)
-06	"	39 "	6.41	"	"	"	"	
-07	"	43 "	5.81	"	"	"	"	
-08	"	47 "	5.32	"	"	"	"	
-09	"	51 "	4.90	"	"	"	"	
-10	"	56 "	4.46	"	"	"	"	
-11	"	62 "	4.03	"	"	"	"	
-12	"	68 "	3.68	"	"	"	"	
-13	"	75 "	3.33	"	"	"	"	
-14	"	82 "	3.05	"	"	"	"	
-15	"	91 "	2.75	"	"	"	"	
-16	"	100 "	2.50	"	"	"	"	
-17	"	110 "	2.27	"	"	"	"	
-18	"	115 "	2.17	"	"	"	"	
-19	"	120 "	2.08	"	"	"	"	
-20	"	130 "	1.92	"	"	"	"	
-21	"	150 "	1.66	"	"	"	"	
-22	"	180 "	1.39	"	"	"	"	
-23	"	200 "	1.25	440	"	"	"	
-24	"	220 "	1.14	440	"	"	"	
-25	"	240 "	1.04	440	"	"	"	
-26	"	270 "	0.93	580	"	"	"	
-27	"	300 "	0.83	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/61								
-01 (A-B)	115, 400 Hz	6 CT	2.667	325	16	4	130°C	See figure 101-2
-02 (A-B)	"	6.3 "	2.540	"	"	"	"	A - 1.375 in.
-03 (A-B)	"	7 "	2.286	"	"	"	"	B - 1.125 in.
-04 (A-B)	"	7.5 "	2.133	"	"	"	"	E - .164-32 UNC-2A
-05 (A-B)	"	8 "	2.000	"	"	"	"	
-06 (A-B)	"	9 "	1.778	"	"	"	"	
-07 (A-B)	"	10 "	1.600	"	"	"	"	
-08 (A-B)	"	11 "	1.455	"	"	"	"	
-09 (A-B)	"	12 "	1.333	"	"	"	"	
-10 (A-B)	"	12.6 "	1.270	"	"	"	"	
-11 (A-B)	"	13 "	1.231	"	"	"	"	
-12 (A-B)	"	15 "	1.067	"	"	"	"	
-13 (A-B)	"	16 "	1.000	"	"	"	"	
-14 (A-B)	"	18 "	0.889	"	"	"	"	
-15 (A-B)	"	20 "	0.800	"	"	"	"	
-16 (A-B)	"	22 "	0.727	"	"	"	"	
-17 (A-B)	"	24 "	0.667	"	"	"	"	
-18 (A-B)	"	26 "	0.615	"	"	"	"	
-19 (A-B)	"	28 "	0.571	"	"	"	"	
-20 (A-B)	"	30 "	0.533	"	"	"	"	
-21 (A-B)	"	33 "	0.485	"	"	"	"	
-22 (A-B)	"	36 "	0.444	"	"	"	"	
-23 (A-B)	"	39 "	0.410	"	"	"	"	
-24 (A-B)	"	43 "	0.372	"	"	"	"	
-25 (A-B)	"	47 "	0.340	"	"	"	"	
-26 (A-B)	"	51 "	0.314	"	"	"	"	
-27 (A-B)	"	56 "	0.286	"	"	"	"	
-28 (A-B)	"	62 "	0.258	"	"	"	"	
-29 (A-B)	"	68 "	0.236	"	"	"	"	
-30 (A-B)	"	75 "	0.213	"	"	"	"	
-31 (A-B)	"	82 "	0.195	"	"	"	"	
-32 (A-B)	"	91 "	0.176	"	"	"	"	
-33 (A-B)	"	100 "	0.160	"	"	"	"	
-34 (A-B)	"	110 "	0.145	"	"	"	"	
-35 (A-B)	"	115 "	0.139	"	"	"	"	
-36 (A-B)	"	120 "	0.133	"	"	"	"	
-37 (A-B)	"	130 "	0.123	"	"	"	"	
-38 (A-B)	"	150 "	0.106	"	"	"	"	
-39 (A-B)	"	180 "	0.089	"	"	"	"	
-40 (A-B)	"	200 "	0.080	440	"	"	"	
-41 (A-B)	"	220 "	0.073	440	"	"	"	
-42 (A-B)	"	240 "	0.067	440	"	"	"	
-43 (A-B)	"	270 "	0.059	580	"	"	"	
-44 (A-B)	"	300 "	0.053	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/62								
-01 (A-B)	115, 400 Hz	6 CT	4.167	325	25	4	130°C	See figure 101-2
-02 (A-B)	"	6.3 "	3.968	"	"	"	"	A - 1.375 in.
-03 (A-B)	"	7 "	3.571	"	"	"	"	B - 1.375 in.
-04 (A-B)	"	7.5 "	3.333	"	"	"	"	E - .164-32 UNC-2A
-05 (A-B)	"	8 "	3.125	"	"	"	"	
-06 (A-B)	"	9 "	2.778	"	"	"	"	
-07 (A-B)	"	10 "	2.500	"	"	"	"	
-08 (A-B)	"	11 "	2.273	"	"	"	"	
-09 (A-B)	"	12 "	2.083	"	"	"	"	
-10 (A-B)	"	12.6 "	1.984	"	"	"	"	
-11 (A-B)	"	13 "	1.923	"	"	"	"	
-12 (A-B)	"	15 "	1.667	"	"	"	"	
-13 (A-B)	"	16 "	1.563	"	"	"	"	
-14 (A-B)	"	18 "	1.389	"	"	"	"	
-15 (A-B)	"	20 "	1.250	"	"	"	"	
-16 (A-B)	"	22 "	1.136	"	"	"	"	
-17 (A-B)	"	24 "	1.042	"	"	"	"	
-18 (A-B)	"	26 "	0.962	"	"	"	"	
-19 (A-B)	"	28 "	0.893	"	"	"	"	
-20 (A-B)	"	30 "	0.833	"	"	"	"	
-21 (A-B)	"	33 "	0.758	"	"	"	"	
-22 (A-B)	"	36 "	0.694	"	"	"	"	
-23 (A-B)	"	39 "	0.641	"	"	"	"	
-24 (A-B)	"	43 "	0.581	"	"	"	"	
-25 (A-B)	"	47 "	0.532	"	"	"	"	
-26 (A-B)	"	51 "	0.490	"	"	"	"	
-27 (A-B)	"	56 "	0.446	"	"	"	"	
-28 (A-B)	"	62 "	0.403	"	"	"	"	
-29 (A-B)	"	68 "	0.367	"	"	"	"	
-30 (A-B)	"	75 "	0.333	"	"	"	"	
-31 (A-B)	"	82 "	0.305	"	"	"	"	
-32 (A-B)	"	91 "	0.275	"	"	"	"	
-33 (A-B)	"	100 "	0.250	"	"	"	"	
-34 (A-B)	"	110 "	0.227	"	"	"	"	
-35 (A-B)	"	115 "	0.218	"	"	"	"	
-36 (A-B)	"	120 "	0.208	"	"	"	"	
-37 (A-B)	"	130 "	0.192	"	"	"	"	
-38 (A-B)	"	150 "	0.166	"	"	"	"	
-39 (A-B)	"	180 "	0.139	"	"	"	"	
-40 (A-B)	"	200 "	0.125	440	"	"	"	
-41 (A-B)	"	220 "	0.113	440	"	"	"	
-42 (A-B)	"	240 "	0.104	440	"	"	"	
-43 (A-B)	"	270 "	0.093	580	"	"	"	
-44 (A-B)	"	300 "	0.083	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/63								
-01	115, 400 Hz	6 CT	8.333	325	50	4	130°C	See figure 101-4
-02	"	6.3 "	7.937	"	"	"	"	A - 2.000 in.
-03	"	7 "	7.143	"	"	"	"	B - 1.500 in.
-04	"	7.5 "	6.667	"	"	"	"	
-05	"	8 "	6.250	"	"	"	"	
-06	"	9 "	5.556	"	"	"	"	
-07	"	10 "	5.000	"	"	"	"	
-08	"	11 "	4.545	"	"	"	"	
-09	"	12 "	4.167	"	"	"	"	
-10	"	12.6 "	3.968	"	"	"	"	
-11	"	13 "	3.846	"	"	"	"	
-12	"	15 "	3.333	"	"	"	"	
-13	"	16 "	3.125	"	"	"	"	
-14	"	18 "	2.778	"	"	"	"	
-15	"	20 "	2.500	"	"	"	"	
-16	"	22 "	2.273	"	"	"	"	
-17	"	24 "	2.083	"	"	"	"	
-18	"	26 "	1.923	"	"	"	"	
-19	"	28 "	1.786	"	"	"	"	
-20	"	30 "	1.667	"	"	"	"	
-21	"	33 "	1.515	"	"	"	"	
-22	"	36 "	1.389	"	"	"	"	
-23	"	39 "	1.282	"	"	"	"	
-24	"	43 "	1.163	"	"	"	"	
-25	"	47 "	1.064	"	"	"	"	
-26	"	51 "	0.980	"	"	"	"	
-27	"	56 "	0.893	"	"	"	"	
-28	"	62 "	0.806	"	"	"	"	
-29	"	68 "	0.735	"	"	"	"	
-30	"	75 "	0.667	"	"	"	"	
-31	"	82 "	0.610	"	"	"	"	
-32	"	91 "	0.549	"	"	"	"	
-33	"	100 "	0.500	"	"	"	"	
-34	"	110 "	0.455	"	"	"	"	
-35	"	115 "	0.435	"	"	"	"	
-36	"	120 "	0.417	"	"	"	"	
-37	"	130 "	0.385	"	"	"	"	
-38	"	150 "	0.333	"	"	"	"	
-39	"	180 "	0.278	"	"	"	"	
-40	"	200 "	0.250	440	"	"	"	
-41	"	220 "	0.227	440	"	"	"	
-42	"	240 "	0.208	440	"	"	"	
-43	"	270 "	0.185	580	"	"	"	
-44	"	300 "	0.167	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/64								
-01	115, 400 Hz	10 CT	7.50	325	50	4	130°C	See figure 101-4
-02	"	11 "	6.82	"	"	"	"	A - 2.000 in.
-03	"	12 "	6.25	"	"	"	"	B - 1.750 in.
-04	"	12.6 "	5.95	"	"	"	"	
-05	"	13 "	5.77	"	"	"	"	
-06	"	15 "	5.00	"	"	"	"	
-07	"	16 "	4.69	"	"	"	"	
-08	"	18 "	4.17	"	"	"	"	
-09	"	20 "	3.75	"	"	"	"	
-10	"	22 "	3.41	"	"	"	"	
-11	"	24 "	3.13	"	"	"	"	
-12	"	26 "	2.89	"	"	"	"	
-13	"	28 "	2.68	"	"	"	"	
-14	"	30 "	2.50	"	"	"	"	
-15	"	33 "	2.27	"	"	"	"	
-16	"	36 "	2.08	"	"	"	"	
-17	"	39 "	1.92	"	"	"	"	
-18	"	43 "	1.74	"	"	"	"	
-19	"	47 "	1.60	"	"	"	"	
-20	"	51 "	1.47	"	"	"	"	
-21	"	56 "	1.34	"	"	"	"	
-22	"	62 "	1.21	"	"	"	"	
-23	"	68 "	1.10	"	"	"	"	
-24	"	75 "	1.00	"	"	"	"	
-25	"	82 "	0.92	"	"	"	"	
-26	"	91 "	0.82	"	"	"	"	
-27	"	100 "	0.75	"	"	"	"	
-28	"	110 "	0.68	"	"	"	"	
-29	"	115 "	0.65	"	"	"	"	
-30	"	120 "	0.63	"	"	"	"	
-31	"	130 "	0.58	"	"	"	"	
-32	"	150 "	0.50	"	"	"	"	
-33	"	180 "	0.42	"	"	"	"	
-34	"	200 "	0.38	440	"	"	"	
-35	"	220 "	0.34	440	"	"	"	
-36	"	240 "	0.31	440	"	"	"	
-37	"	270 "	0.28	580	"	"	"	
-38	"	300 "	0.25	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/65								
-01	115, 400 Hz	12 CT	8.33	325	100	4	130°C	See figure 101-4
-02	"	12.6 "	7.94	"	"	"	"	A - 2.250 in.
-03	"	13 "	7.69	"	"	"	"	B - 2.000 in.
-04	"	15 "	6.67	"	"	"	"	
-05	"	16 "	6.25	"	"	"	"	
-06	"	18 "	5.56	"	"	"	"	
-07	"	20 "	5.00	"	"	"	"	
-08	"	22 "	4.55	"	"	"	"	
-09	"	24 "	4.17	"	"	"	"	
-10	"	26 "	3.85	"	"	"	"	
-11	"	28 "	3.57	"	"	"	"	
-12	"	30 "	3.33	"	"	"	"	
-13	"	33 "	3.03	"	"	"	"	
-14	"	36 "	2.78	"	"	"	"	
-15	"	39 "	2.56	"	"	"	"	
-16	"	43 "	2.33	"	"	"	"	
-17	"	47 "	2.13	"	"	"	"	
-18	"	51 "	1.96	"	"	"	"	
-19	"	56 "	1.79	"	"	"	"	
-20	"	62 "	1.61	"	"	"	"	
-21	"	68 "	1.47	"	"	"	"	
-22	"	75 "	1.33	"	"	"	"	
-23	"	82 "	1.22	"	"	"	"	
-24	"	91 "	1.10	"	"	"	"	
-25	"	100 "	1.00	"	"	"	"	
-26	"	110 "	0.91	"	"	"	"	
-27	"	115 "	0.87	"	"	"	"	
-28	"	120 "	0.83	"	"	"	"	
-29	"	130 "	0.77	"	"	"	"	
-30	"	150 "	0.67	"	"	"	"	
-31	"	180 "	0.56	"	"	"	"	
-32	"	200 "	0.50	440	"	"	"	
-33	"	220 "	0.45	440	"	"	"	
-34	"	240 "	0.42	440	"	"	"	
-35	"	270 "	0.37	580	"	"	"	
-36	"	300 "	0.33	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/66								
-01	115, 400 Hz	26 CT	9.62	325	250	4	130°C	See figure 101-3
-02	"	28 "	8.93	"	"	"	"	A - 2.875 in.
-03	"	30 "	8.33	"	"	"	"	B - 2.000 in.
-04	"	33 "	7.58	"	"	"	"	
-05	"	36 "	6.94	"	"	"	"	
-06	"	39 "	6.41	"	"	"	"	
-07	"	43 "	5.81	"	"	"	"	
-08	"	47 "	5.32	"	"	"	"	
-09	"	51 "	4.90	"	"	"	"	
-10	"	56 "	4.46	"	"	"	"	
-11	"	62 "	4.03	"	"	"	"	
-12	"	68 "	3.68	"	"	"	"	
-13	"	75 "	3.33	"	"	"	"	
-14	"	82 "	3.05	"	"	"	"	
-15	"	91 "	2.75	"	"	"	"	
-16	"	100 "	2.50	"	"	"	"	
-17	"	110 "	2.27	"	"	"	"	
-18	"	115 "	2.17	"	"	"	"	
-19	"	120 "	2.08	"	"	"	"	
-20	"	130 "	1.92	"	"	"	"	
-21	"	150 "	1.66	"	"	"	"	
-22	"	180 "	1.39	"	"	"	"	
-23	"	200 "	1.25	440	"	"	"	
-24	"	220 "	1.14	440	"	"	"	
-25	"	240 "	1.04	440	"	"	"	
-26	"	270 "	0.93	580	"	"	"	
-27	"	300 "	0.83	580	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/77 -01	115 400 Hz (1-2)	115 (3-4)	.45 (3-4)	326 (1-2) 326 (3-4)	56.9	5	170°C	See MIL-T-27/77
MIL-T-27/82 -01	26 400 Hz (1-2)	3.8 CT (3-5)	.002	50 (1-2) 50 (1-2)	.008	5	155°C	See MIL-T-27/82
MIL-T-27/118 -01	115 400 Hz (1-2)	40 CT (3-5)	.078	165 (1-2) 57 (3-5)	3.12	5	130°C	See MIL-T-27/118
MIL-T-27/134 -01	120 400 Hz (1-2)	28.6 (3-4)	.385	250	12	5	155°C	See MIL-T-27/134
MIL-T-27/140 -01	115 60 Hz (1-2)	50 (3-4)	2	357	100	4	130°C	See MIL-T-27/140
MIL-T-27/156 -01	115 50/60 Hz (2-4), (1-4), (1-3), (2-3)	8.25 to 13.44	.105	535	4.8	4	130°C	See MIL-T-27/156
MIL-T-27/157 -01	115 50/60 Hz (2-4), (1-4), (1-3), (2-3)	20.25 (5-7) 20.25 (8-10)	.4 (5-7) .4 (8-10)	535	16	4	130°C	See MIL-T-27/157
MIL-T-27/180 -01	57.5/99.7/115 400 Hz (1-2-3-4)	12.6 (5-6) 12.6 CT (7-9)	2 (5-6) 2 (7-9)	535	51	4	130°C	See MIL-T-27/180
MIL-T-27/181 -01	115 60 Hz (1-2)	6.3 CT (3-5) 450 CT (6-8)	30 mA (6-8) 2 (3-5)	535	26.1	4	130°C	See MIL-T-27/181
MIL-T-27/211 -01	250 400 Hz (1-2)	30 (4-5)	.5	250	15 SH	5	170°C	See MIL-T-27/211

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/212 -01	250 400 Hz (1-2)	250 (4-5) 25 (6-7)	.2 (4-5) .01 (6-7)	250	50 SH	5	170°C	See MIL-T-27/212
MIL-T-27/235 -01 -02 -03 -04 -05	115 50/60 Hz (1-2) " " "	115 (5-6) " " "	3.5 .435 1.04 1.4 8.7	175 " " " "	400 50 120 160 1000	4 " " " "	105°C " " " "	See MIL-T-27/235
MIL-T-27/268 -01	115 60 Hz (1-2)	115 (3-4)	1	165	115	4	155°C	See MIL-T-27/268
MIL-T-27/269 -01	115 400 Hz (1-2)	115 (3-4)	.5	165	57.5	5	155°C	See MIL-T-27/269

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number	Primary voltage (volts rms)	Secondary voltage (volts rms)	Secondary current (amperes rms)	Maximum working voltage (volts)	VA rating	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/300	105/115/125 60 Hz							
-01	(1-2-3-4)	2.5 (6-5)	3	175	7.5	4	105°C	See MIL-T-27/300
-02	"	2.5 (6-5)	10	"	25	"	"	"
-03	"	2.5 (6-5)	10	"	25	"	"	"
-04	"	5.0 (6-5)	3	"	15	"	"	"
-05	"	5.0 (6-5)	10	"	50	"	"	"
-06	"	5.0 (6-5)	10	"	50	"	"	"
-07	"	6.3 (6-5)	2	"	12.6	"	"	"
-08	"	6.3 (6-5)	5	"	31.5	"	"	"
-09	"	6.3 (6-5)	10	"	63	"	"	"
-10	"	6.3 (6-5)	20	"	126	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number M27/312-	Primary voltage (volts)	Secondary (3-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±25 percent			
01	115	5.0	1.00	0.335	4	130°C	See MIL-T-27/312
02	60 Hz	6.3	0.79	0.530	"	"	
03	"	8.0	0.67	0.870	"	"	
04	"	10.0	0.50	1.34	"	"	
05	"	12.6	0.39	2.06	"	"	
06	"	14.0	0.36	2.95	"	"	
07	"	16.0	0.34	3.35	"	"	
08	"	18.0	0.28	4.65	"	"	
09	"	20.0	0.25	5.25	"	"	
10	"	22.0	0.22	7.30	"	"	
11	"	25.0	0.20	8.23	"	"	
12	"	28.0	0.18	11.4	"	"	
13	"	31.0	0.16	13.8	"	"	
14	"	35.0	0.14	17.6	"	"	
15	"	39.0	0.13	19.7	"	"	
16	"	43.0	0.12	22.0	"	"	
17	"	48.0	0.10	30.0	"	"	
18	"	55.0	0.09	34.4	"	"	
19	"	63.0	0.08	52.0	"	"	
20	"	70.0	0.071	68.0	"	"	
21	"	80.0	0.067	80.0	"	"	
22	"	90.0	0.055	112	"	"	
23	"	100	0.050	113	"	"	
24	"	110	0.045	140	"	"	
25	"	123	0.040	198	"	"	
26	"	138	0.036	227	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number M27/313-	Primary voltage (volts)	Secondary (J-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±25 percent			
01	115	5.0	2.0	0.12	4	130°C	See MIL-T-27/313
02	60 Hz	6.3	1.58	0.18	"	"	
03	"	8.0	1.25	0.27	"	"	
04	"	10.0	1.00	0.42	"	"	
05	"	12.6	0.79	0.65	"	"	
06	"	14.0	0.72	0.74	"	"	
07	"	16.0	0.68	1.08	"	"	
08	"	18.0	0.55	1.42	"	"	
09	"	20.0	0.50	1.54	"	"	
10	"	22.0	0.45	1.90	"	"	
11	"	25.0	0.40	2.55	"	"	
12	"	28.0	0.36	3.00	"	"	
13	"	31.0	0.32	3.80	"	"	
14	"	35.0	0.29	4.50	"	"	
15	"	39.0	0.26	6.30	"	"	
16	"	43.0	0.23	7.00	"	"	
17	"	48.0	0.21	9.30	"	"	
18	"	55.0	0.18	11.0	"	"	
19	"	63.0	0.16	16.4	"	"	
20	"	70.0	0.143	19.0	"	"	
21	"	80.0	0.125	25.0	"	"	
22	"	90.0	0.111	30.4	"	"	
23	"	100	0.100	40.5	"	"	
24	"	110	0.091	44.5	"	"	
25	"	123	0.081	70.0	"	"	
26	"	138	0.073	80.0	"	"	
27	"	157	0.064	100	"	"	
28	"	175	0.057	111	"	"	
29	"	200	0.050	160	"	"	
30	"	220	0.045	168	"	"	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the currentversion before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number M27/314-	Primary voltage (volts)	Secondary (3-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±25 percent			
01	115	5.0	3.00	0.07	4	130°C	See MIL-T-27/314
02	60 Hz	6.5	2.38	0.094	"	"	
03	"	8.0	1.88	0.16	"	"	
04	"	10.0	1.50	0.23	"	"	
05	"	12.6	1.19	0.40	"	"	
06	"	14.0	1.07	0.60	"	"	
07	"	16.0	0.94	0.67	"	"	
08	"	18.0	0.85	0.78	"	"	
09	"	20.0	0.75	0.90	"	"	
10	"	22.0	0.68	1.20	"	"	
11	"	25.0	0.60	1.40	"	"	
12	"	28.0	0.54	1.90	"	"	
13	"	31.0	0.46	2.20	"	"	
14	"	35.0	0.43	3.00	"	"	
15	"	39.0	0.38	3.50	"	"	
16	"	43.0	0.35	4.65	"	"	
17	"	48.0	0.31	5.20	"	"	
18	"	55.0	0.27	7.50	"	"	
19	"	66.0	0.24	8.60	"	"	
20	"	70.0	0.212	11.2	"	"	
21	"	80.0	0.187	15.8	"	"	
22	"	90.0	0.167	20.0	"	"	
23	"	100	0.150	22.8	"	"	
24	"	110	0.136	28.0	"	"	
25	"	123	0.122	33.5	"	"	
26	"	138	0.108	46.0	"	"	
27	"	157	0.096	53.0	"	"	
28	"	175	0.086	70.0	"	"	
29	"	200	0.075	87.0	"	"	
30	"	220	0.068	118	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number M27/315-	Primary voltage (volts)	Secondary (J-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±25 percent			
01	115	5.0	4.00	0.066	4	130°C	See MIL-T-27/315
02	60 Hz	6.3	3.16	0.100	"	"	
03	"	8.0	2.50	0.150	"	"	
04	"	10.0	2.00	0.230	"	"	
05	"	12.6	1.59	0.340	"	"	
06	"	14.0	1.43	0.40	"	"	
07	"	16.0	1.25	0.52	"	"	
08	"	18.0	1.11	0.62	"	"	
09	"	20.0	1.00	0.85	"	"	
10	"	22.0	0.91	0.95	"	"	
11	"	25.0	0.80	1.37	"	"	
12	"	28.0	0.71	1.60	"	"	
13	"	31.0	0.64	2.20	"	"	
14	"	35.0	0.57	2.40	"	"	
15	"	39.0	0.51	3.6	"	"	
16	"	43.0	0.46	4.0	"	"	
17	"	48.0	0.42	4.4	"	"	
18	"	55.0	0.36	6.0	"	"	
19	"	63.0	0.32	8.6	"	"	
20	"	70.0	.286	9.8	"	"	
21	"	80.0	.250	13.4	"	"	
22	"	90.0	.222	14.8	"	"	
23	"	100	.200	15.5	"	"	
24	"	110	.182	23.0	"	"	
25	"	123	.162	35.0	"	"	
26	"	138	.145	37.5	"	"	
27	"	157	.127	48.2	"	"	
28	"	175	.114	55.0	"	"	
29	"	200	.100	75.0	"	"	
30	"	220	.091	95.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number M27/316-	Primary voltage (volts)	Secondary (3-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±25 percent			
01	115	5.0	6.00	0.04	4	130°C	See MIL-T-27/316
02	60 Hz	6.3	4.76	0.06	"	"	
03	"	8.0	3.76	0.08	"	"	
04	"	10.0	3.00	0.14	"	"	
05	"	12.6	2.38	0.20	"	"	
06	"	14.0	2.15	0.23	"	"	
07	"	16.0	1.87	0.28	"	"	
08	"	18.0	1.67	0.38	"	"	
09	"	20.0	1.50	0.40	"	"	
10	"	22.0	1.36	0.55	"	"	
11	"	25.0	1.20	0.70	"	"	
12	"	28.0	1.07	0.94	"	"	
13	"	31.0	0.97	0.96	"	"	
14	"	35.0	0.86	1.40	"	"	
15	"	39.0	0.77	1.62	"	"	
16	"	43.0	0.70	2.15	"	"	
17	"	48.0	0.63	2.40	"	"	
18	"	55.0	0.55	3.50	"	"	
19	"	63.0	0.48	3.90	"	"	
20	"	70.0	0.429	5.5	"	"	
21	"	80.0	0.375	6.4	"	"	
22	"	90.0	0.332	8.6	"	"	
23	"	100	0.300	10.0	"	"	
24	"	110	0.272	13.6	"	"	
25	"	123	0.244	15.3	"	"	
26	"	138	0.217	21.0	"	"	
27	"	157	0.191	24.5	"	"	
28	"	175	0.171	35.0	"	"	
29	"	200	0.150	40.5	"	"	
30	"	220	0.136	57.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number M27/317-	Primary voltage (volts)	Secondary (3-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±15 percent			
01	115	5.0	8.00	0.030	4	130°C	See MIL-T-27/317
02	60 Hz	6.3	6.35	0.059	"	"	
03	"	8.0	5.00	0.079	"	"	
04	"	10.0	4.00	0.110	"	"	
05	"	12.6	3.18	0.180	"	"	
06	"	14.0	2.86	0.190	"	"	
07	"	16.0	2.50	0.28	"	"	
08	"	18.0	2.21	0.36	"	"	
09	"	20.0	2.00	0.43	"	"	
10	"	22.0	1.82	0.57	"	"	
11	"	25.0	1.60	0.67	"	"	
12	"	28.0	1.43	0.90	"	"	
13	"	31.0	1.29	0.95	"	"	
14	"	35.0	1.14	1.32	"	"	
15	"	39.0	1.03	1.50	"	"	
16	"	43.0	0.93	1.62	"	"	
17	"	48.0	0.83	2.35	"	"	
18	"	55.0	0.73	3.20	"	"	
19	"	63.0	0.64	3.70	"	"	
20	"	70.0	0.572	5.2	"	"	
21	"	80.0	0.500	6.1	"	"	
22	"	90.0	0.445	8.4	"	"	
23	"	100	0.400	9.4	"	"	
24	"	110	0.364	12.5	"	"	
25	"	123	0.325	14.6	"	"	
26	"	138	0.289	20.5	"	"	
27	"	157	0.254	26.6	"	"	
28	"	175	0.228	33.7	"	"	
29	"	200	0.200	38.5	"	"	
30	"	220	0.182	57.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number M27/318-	Primary voltage (volts)	Secondary (3-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±25 percent			
01	115	5.0	16.00	0.011	4	130°C	See MIL-T-27/318
02	60 Hz	6.3	12.70	0.016	"	"	
03	"	8.0	10.00	0.037	"	"	
04	"	10.0	8.00	0.050	"	"	
05	"	12.6	6.35	0.070	"	"	
06	"	14.0	5.72	0.100	"	"	
07	"	16.0	5.00	0.120	"	"	
08	"	18.0	4.44	0.160	"	"	
09	"	20.0	4.00	0.190	"	"	
10	"	22.0	3.64	0.25	"	"	
11	"	25.0	3.20	0.30	"	"	
12	"	28.0	2.86	0.40	"	"	
13	"	31.0	2.58	0.45	"	"	
14	"	35.0	2.28	0.50	"	"	
15	"	39.0	2.05	0.70	"	"	
16	"	43.0	1.85	0.94	"	"	
17	"	48.0	1.63	1.00	"	"	
18	"	55.0	1.46	1.50	"	"	
19	"	65.0	1.27	1.70	"	"	
20	"	70.0	1.14	2.40	"	"	
21	"	80.0	1.00	2.70	"	"	
22	"	90.0	0.890	3.80	"	"	
23	"	100	0.800	4.20	"	"	
24	"	110	0.726	5.70	"	"	
25	"	125	0.650	6.50	"	"	
26	"	138	0.580	9.50	"	"	
27	"	157	0.510	10.5	"	"	
28	"	175	0.457	14.8	"	"	
29	"	200	0.400	17.0	"	"	
30	"	220	0.364	23.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number M27/319-	Primary voltage (volts)	Secondary (J-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±25 percent			
01	115	6.3	19.00	.012	4	130°C	See MIL-T-27/319
02	60 Hz	8.0	15.00	.018	"	"	
03	"	10.0	12.00	.031	"	"	
04	"	12.6	9.58	.041	"	"	
05	"	14.0	8.59	.055	"	"	
06	"	16.0	7.50	.072	"	"	
07	"	18.0	6.68	.080	"	"	
08	"	20.0	6.00	0.120	"	"	
09	"	22.0	5.45	0.125	"	"	
10	"	25.0	4.80	0.182	"	"	
11	"	28.0	4.29	0.205	"	"	
12	"	31.0	3.87	0.310	"	"	
13	"	35.0	3.46	0.350	"	"	
14	"	39.0	3.07	0.342	"	"	
15	"	48.0	2.79	0.480	"	"	
16	"	46.0	2.50	0.680	"	"	
17	"	55.0	2.18	0.820	"	"	
18	"	65.0	1.91	1.11	"	"	
19	"	70.0	1.72	1.20	"	"	
20	"	80.0	1.50	1.43	"	"	
21	"	90.0	1.34	1.96	"	"	
22	"	100	1.20	2.75	"	"	
23	"	110	1.09	3.05	"	"	
24	"	123	0.970	4.35	"	"	
25	"	138	0.870	4.85	"	"	
26	"	157	0.760	5.45	"	"	
27	"	175	0.665	7.60	"	"	
28	"	200	0.600	8.80	"	"	
29	"	220	0.546	12.1	"	"	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the currenversion before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number M27/320-	Primary voltage (volts)	Secondary (5-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±25 percent			
01	115	8.0	20.00	.014	4	130°C	See MIL-T-27/320
02	60 Hz	10.0	16.00	.018	"	"	
03	"	12.6	12.70	038	"	"	
04	"	14.0	11.40	.042	"	"	
05	"	16.0	10.00	.046	"	"	
06	"	18.0	8.89	.060	"	"	
07	"	20.0	8.00	.070	"	"	
08	"	22.0	7.27	.092	"	"	
09	"	25.0	6.40	0.110	"	"	
10	"	28.0	5.72	0.150	"	"	
11	"	31.0	5.17	0.166	"	"	
12	"	35.0	4.57	0.240	"	"	
13	"	39.0	4.10	0.270	"	"	
14	"	43.0	3.70	0.382	"	"	
15	"	48.0	3.33	0.405	"	"	
16	"	55.0	2.91	0.600	"	"	
17	"	65.0	2.52	0.640	"	"	
18	"	70.0	2.280	0.93	"	"	
19	"	80.0	2.000	1.08	"	"	
20	"	90.0	1.780	1.49	"	"	
21	"	100	1.600	1.69	"	"	
22	"	110	1.450	2.30	"	"	
23	"	123	1.300	2.57	"	"	
24	"	138	1.150	3.60	"	"	
25	"	157	1.020	4.10	"	"	
26	"	175	0.914	5.82	"	"	
27	"	200	0.800	6.70	"	"	
28	"	220	0.728	8.95	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number M27/321-	Primary voltage (volts)	Secondary (3-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±25 percent			
01	115	10.0	20.00	0.015	4	130°C	See MIL-T-27/521
02	60 Hz	12.6	15.90	0.027	"	"	
03	"	14.0	14.30	0.029	"	"	
04	"	16.0	12.50	0.034	"	"	
05	"	18.0	11.10	0.045	"	"	
06	"	20.0	10.00	0.066	"	"	
07	"	22.0	9.10	0.073	"	"	
08	"	25.0	8.00	0.079	"	"	
09	"	28.0	7.10	0.11	"	"	
10	"	31.0	6.40	0.12	"	"	
11	"	35.0	5.71	0.17	"	"	
12	"	39.0	5.12	0.18	"	"	
13	"	43.0	4.64	0.26	"	"	
14	"	48.0	4.17	0.29	"	"	
15	"	55.0	3.64	0.41	"	"	
16	"	63.0	3.18	0.47	"	"	
17	"	70.0	2.860	0.67	"	"	
18	"	80.0	2.500	0.74	"	"	
19	"	90.0	2.220	1.05	"	"	
20	"	100	2.000	1.17	"	"	
21	"	110	1.820	1.60	"	"	
22	"	123	1.620	1.80	"	"	
23	"	138	1.450	2.50	"	"	
24	"	157	1.270	2.86	"	"	
25	"	175	1.140	4.09	"	"	
26	"	200	1.000	4.55	"	"	
27	"	220	0.914	6.50	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Part number and dash number MZ7/322-	Primary voltage (volts)	Secondary (3-5)			Grade	Operating temperature (max)	Figure and dimensions
		Voltage (volts) ±3 percent	Current (amperes)	DC resistance (ohms) ±25 percent			
01	115	16.0	18.70	0.016	4	130°C	See MIL-T-27/332
02	60 Hz	18.0	16.70	0.020	"	"	
03	"	20.0	15.00	0.023	"	"	
04	"	22.0	13.60	0.031	"	"	
05	"	25.0	12.00	0.042	"	"	
06	"	28.0	10.70	0.046	"	"	
07	"	31.0	9.67	0.054	"	"	
08	"	35.0	8.59	0.072	"	"	
09	"	39.0	7.69	0.080	"	"	
10	"	43.0	6.95	0.108	"	"	
11	"	48.0	6.26	0.165	"	"	
12	"	55.0	5.46	0.175	"	"	
13	"	65.0	4.76	0.187	"	"	
14	"	70.0	4.29	0.26	"	"	
15	"	80.0	3.75	0.30	"	"	
16	"	90.0	3.320	0.45	"	"	
17	"	100	3.000	0.48	"	"	
18	"	110	2.72	0.65	"	"	
19	"	123	2.44	0.74	"	"	
20	"	138	2.17	1.02	"	"	
21	"	157	1.91	1.16	"	"	
22	"	175	1.710	1.63	"	"	
23	"	200	1.50	1.92	"	"	
24	"	220	1.36	2.55	"	"	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/326-	Primary voltage (volts)	Secondary voltage (series) volts rms (3-6)	Secondary current (series) amperes (3-6)	Secondary voltage (parallel) volts rms (3-5)	Secondary current (parallel) amperes (3-5)	Secondary dc resistance each winding ohms ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 60 Hz	10.0	0.50	5.0	1.00	0.62	4	130°C	See MIL-T-27/326
02	"	12.6	0.40	6.3	0.80	0.96	"	"	
03	"	16.0	0.31	8.0	0.62	1.52	"	"	
04	"	20.0	0.25	10.0	0.50	2.38	"	"	
05	"	24.0	0.20	12.0	0.40	3.67	"	"	
06	"	34.0	0.15	17.0	0.30	6.4	"	"	
07	"	40.0	0.12	20.0	0.24	9.7	"	"	
08	"	56.0	0.09	28.0	0.18	20.8	"	"	
09	"	88.0	0.05	44.0	0.10	41	"	"	
10	"	120.0	0.04	60.0	0.08	73	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/327-	Primary voltage (volts)	Secondary voltage (series) volts rms (3-6)	Secondary current (series) amperes (3-6)	Secondary voltage (parallel) volts rms (3-5)	Secondary current (parallel) amperes (3-5)	Secondary dc resistance each winding ohms ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 60 Hz	10.0	1.50	5.0	3.00	0.116	4	130°C	See MIL-T-27/327
02	"	12.6	1.19	6.3	2.38	0.167	"	"	
03	"	16.0	0.93	8.0	1.86	0.252	"	"	
04	"	20.0	0.75	10.0	1.50	0.48	"	"	
05	"	24.0	0.60	12.0	1.20	0.58	"	"	
06	"	34.0	0.44	17.0	0.86	1.06	"	"	
07	"	40.0	0.36	20.0	0.72	1.57	"	"	
08	"	56.0	0.27	28.0	0.54	3.5	"	"	
09	"	88.0	0.15	44.0	0.30	8.78	"	"	
10	"	120.0	0.12	60.0	0.24	14.8	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/328-	Primary voltage (volts)	Secondary voltage (series) volts rms (3-6)	Secondary current (series) amperes (3-6)	Secondary voltage (parallel) volts rms (3-5)	Secondary current (parallel) amperes (3-5)	Secondary dc resistance each winding ohms ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 60 Hz	10.0	3.00	5.0	6.00	0.064	4	130°C	See MIL-T-27/328
02	"	12.6	2.38	6.3	4.76	0.104	"	"	
03	"	16.0	1.86	8.0	3.72	0.151	"	"	
04	"	20.0	1.50	10.0	3.00	0.26	"	"	
05	"	24.0	1.20	12.0	2.40	0.34	"	"	
06	"	34.0	0.88	17.0	1.76	0.64	"	"	
07	"	40.0	0.72	20.0	1.44	0.92	"	"	
08	"	56.0	0.54	28.0	1.08	1.63	"	"	
09	"	88.0	0.30	44.0	0.60	5.10	"	"	
10	"	120.0	0.24	60.0	0.48	8.75	"	"	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/329-	Primary voltage (volts)	Secondary voltage (series) volts rms (3-6)	Secondary current (series) amperes (3-6)	Secondary voltage (parallel) volts rms (3-5)	Secondary current (parallel) amperes (3-5)	Secondary dc resistance each winding ohms ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 60 Hz	10.0	6.00	5.0	12.00	0.0273	4	130°C	See MIL-T-27/329
02	"	12.6	4.76	6.3	9.52	0.043	"	"	
03	"	16.0	3.72	8.0	7.44	0.067	"	"	
04	"	20.0	3.00	10.0	6.00	0.107	"	"	
05	"	24.0	2.40	12.0	4.80	0.163	"	"	
06	"	34.0	1.76	17.0	3.52	0.36	"	"	
07	"	40.0	1.44	20.0	2.88	0.422	"	"	
08	"	56.0	1.08	28.0	2.16	0.74	"	"	
09	"	88.0	0.60	44.0	1.20	1.84	"	"	
10	"	120.0	0.48	60.0	0.96	3.96	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/330-	Primary voltage (volts)	Secondary voltage (series) volts rms (3-6)	Secondary current (series) amperes (3-6)	Secondary voltage (parallel) volts rms (3-5)	Secondary current (parallel) amperes (3-5)	Secondary dc resistance each winding ohms ±25%	Volt amperes	Grade	Operating temperature (max)	Figure and dimensions
01	115 60 Hz	10.0	10.00	5.0	20.00	0.0117	100	4	130°C	See MIL-T-27/330
02	"	12.6	10.00	6.3	20.00	0.014	126	"	"	
03	"	16.0	8.75	8.0	17.50	0.0223	140	"	"	
04	"	20.0	7.00	10.0	14.00	0.0335	"	"	"	
05	"	24.0	5.80	12.0	11.60	0.0563	"	"	"	
06	"	34.0	4.10	17.0	8.20	0.118	"	"	"	
07	"	40.0	3.50	20.0	7.00	0.14	"	"	"	
08	"	56.0	2.50	28.0	5.00	0.31	"	"	"	
09	"	88.0	1.58	44.0	3.16	0.58	"	"	"	
10	"	120.0	1.16	60.0	2.32	1.0	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/331-	Primary voltage (volts)	Secondary voltage (series) volts rms (3-6)	Secondary current (series) amperes (3-6)	Secondary voltage (parallel) volts rms (3-5)	Secondary current (parallel) amperes (3-5)	Secondary dc resistance each winding ohms ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 60 Hz	16.0	10.00	8.0	20.00	0.0163	4	130°C	See MIL-T-27/331
02	"	20.0	8.50	10.0	17.00	0.0256	"	"	
03	"	24.0	7.08	12.0	14.16	0.039	"	"	
04	"	34.0	5.00	17.0	10.00	0.088	"	"	
05	"	40.0	4.25	20.0	8.50	0.13	"	"	
06	"	56.0	3.03	28.0	6.06	0.196	"	"	
07	"	88.0	1.93	44.0	3.86	0.53	"	"	
08	"	120.0	1.41	60.0	2.82	0.92	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/332-	Primary voltage (volts)	Secondary voltage (3-6) (V rms) Series (CT)	Secondary voltage (3-6) (V rms) Parallel	Secondary current (3-6) (amperes) Series	Secondary current (3-6) (amperes) Parallel	Grade	Operating temperature (max)	Figure and dimensions
01	115 400 Hz	10	5	0.70	1.40	5	130°C	See MIL-T-27/332
02	"	12.6	6.3	0.55	1.11	"	"	
03	"	16	8	0.437	0.874	"	"	
04	"	20	10	0.35	0.70	"	"	
05	"	24	12	0.29	0.58	"	"	
06	"	34	17	0.205	0.411	"	"	
07	"	40	20	0.175	0.350	"	"	
08	"	56	28	0.125	0.250	"	"	
09	"	88	44	0.079	0.158	"	"	
10	"	120	60	0.058	0.116	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/333-	Primary voltage (volts)	Secondary voltage (3-6) (V rms)		Secondary current (3-6) (amperes)		Grade	Operating temperature (max)	Figure and dimensions
		Series (CT)	Parallel	Series	Parallel			
01	115 400 Hz	10	5	1.00	2.00	5	130°C	See MIL-T-27/333
02	"	12.6	6.3	0.79	1.58	"	"	
03	"	16	8	0.625	1.25	"	"	
04	"	20	10	0.50	1.00	"	"	
05	"	24	12	0.42	0.84	"	"	
06	"	34	17	0.294	0.588	"	"	
07	"	40	20	0.250	0.50	"	"	
08	"	56	28	0.178	0.356	"	"	
09	"	88	44	0.113	0.226	"	"	
10	"	120	60	0.083	0.166	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/334-	Primary voltage (volts)	Secondary voltage (3-6) (V rms)		Secondary current (3-6) (amperes)		Grade	Operating temperature (max)	Figure and dimensions
		Series (CT)	Parallel	Series	Parallel			
01	115 400 Hz	10	5	2.50	5.00	5	130°C	See MIL-T-27/334
02	"	12.6	6.3	2.00	4.00	"	"	
03	"	16	8	1.56	3.12	"	"	
04	"	20	10	1.25	2.50	"	"	
05	"	24	12	1.04	2.08	"	"	
06	"	34	17	0.735	1.47	"	"	
07	"	40	20	0.625	1.25	"	"	
08	"	56	28	0.446	0.892	"	"	
09	"	88	44	0.284	0.568	"	"	
10	"	120	60	0.208	0.416	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/335-	Primary voltage (volts)	Secondary voltage (3-6) (V rms)		Secondary current (3-6) (amperes)		Grade	Operating temperature (max)	Figure and dimensions
		Series (CT)	Parallel	Series	Parallel			
01	115 400 Hz	10	5	4.00	8.00	S	130°C	See MIL-T-27/335
02	"	12.6	6.3	4.00	8.00	"	"	
03	"	16	8	3.12	6.24	"	"	
04	"	20	10	2.50	5.00	"	"	
05	"	24	12	2.08	4.16	"	"	
06	"	34	17	1.47	2.94	"	"	
07	"	40	20	1.25	2.50	"	"	
08	"	56	28	0.89	1.78	"	"	
09	"	88	44	0.56	1.12	"	"	
10	"	120	60	0.41	0.82	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/336-	Primary voltage (volts)	Secondary voltage (3-6) (V rms)		Secondary current (3-6) (amperes)		Grade	Operating temperature (max)	Figure and dimensions
		Series (CT)	Parallel	Series	Parallel			
01	115 400 Hz	10	5	12.0	24.0	5	130°C	See MIL-T-27/336
02	"	12.6	6.3	9.50	19.0	"	"	
03	"	16	8	7.50	15.0	"	"	
04	"	20	10	6.0	12.0	"	"	
05	"	24	12	5.0	10.0	"	"	
06	"	34	17	3.53	7.06	"	"	
07	"	40	20	3.0	6.0	"	"	
08	"	56	28	2.14	4.28	"	"	
09	"	88	44	1.36	2.72	"	"	
10	"	120	60	1.0	2.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/337-	Primary voltage (volts)	Secondary voltage (3-6) (V rms)		Secondary current (3-6) (amperes)		Grade	Operating temperature (max)	Figure and dimensions
		Series (CT)	Parallel	Series	Parallel			
01	115 400 Hz	10	5	15	30	5	130°C	See MIL-T-27/337
02	"	12.6	6.3	11.9	23.8	"	"	
03	"	16	8	9.37	18.7	"	"	
04	"	20	10	7.50	15	"	"	
05	"	24	12	6.25	12.5	"	"	
06	"	34	17	4.41	8.82	"	"	
07	"	40	20	3.75	7.50	"	"	
08	"	56	28	2.68	5.36	"	"	
09	"	88	44	1.70	3.40	"	"	
10	"	120	60	1.25	2.50	"	"	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Chéck the source to verify that this is the currentversion before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/338-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 400 Hz	5.0	0.400	0.60	5	130°C	See MIL-T-27/338
02	"	6.3	0.317	1.06	"	"	
03	"	8.0	0.250	1.63	"	"	
04	"	10.0	0.200	2.50	"	"	
05	"	12.6	0.158	4.10	"	"	
06	"	14.0	0.142	5.59	"	"	
07	"	16.0	0.125	6.63	"	"	
08	"	18.0	0.111	9.00	"	"	
09	"	20.0	0.100	10.9	"	"	
10	"	22.0	0.091	14.6	"	"	
11	"	25.0	0.080	20.4	"	"	
12	"	28.0	0.071	30.0	"	"	
13	"	31.0	0.064	25.6	"	"	
14	"	35.0	0.057	29.5	"	"	
15	"	39.0	0.051	38.6	"	"	
16	"	43.0	0.046	44.3	"	"	
17	"	48.0	0.041	57.0	"	"	
18	"	55.0	0.036	89.0	"	"	
19	"	63.0	0.031	100.0	"	"	
20	"	70.0	0.028	139.0	"	"	
21	"	80.0	0.025	163.0	"	"	
22	"	90.0	0.022	218.0	"	"	
23	"	100.0	0.020	283.0	"	"	
24	"	110.0	0.018	392.0	"	"	
25	"	123.0	0.016	495.0	"	"	
26	"	138.0	0.014	550.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/339-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 400 Hz	5.0	1.2	.173	5	130°C	See MIL-T-27/339
02	"	6.3	.95	.24	"	"	
03	"	8.0	.75	.396	"	"	
04	"	10.0	.60	.587	"	"	
05	"	12.6	.475	.99	"	"	
06	"	14.0	.428	1.11	"	"	
07	"	16.0	.375	1.58	"	"	
08	"	18.0	.333	2.21	"	"	
09	"	20.0	.300	2.78	"	"	
10	"	22.0	.273	2.8	"	"	
11	"	25.0	.240	3.6	"	"	
12	"	28.0	.214	4.2	"	"	
13	"	31.0	.192	5.71	"	"	
14	"	35.0	.171	6.89	"	"	
15	"	39.0	.154	9.39	"	"	
16	"	43.0	.139	10.25	"	"	
17	"	48.0	.125	15.30	"	"	
18	"	55.0	.109	17.30	"	"	
19	"	63.0	.095	24.9	"	"	
20	"	70.0	.085	27.1	"	"	
21	"	80.0	.075	39.0	"	"	
22	"	90.0	.067	41.0	"	"	
23	"	100.0	.060	59.5	"	"	
24	"	110.0	.054	68.5	"	"	
25	"	123.0	.048	96.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/339-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
26	115 400 Hz	138.0	.043	133.0	5	130°C	See MIL-T-27/339
27	"	157.0	.038	153.0	"	"	
28	"	175.0	.034	168.0	"	"	
29	"	200.0	.030	248.0	"	"	
30	"	220.0	.027	278.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/340-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 V, 400 Hz	5.0	3.0	.052	5	130°C	See MIL-T-27/340
02	"	6.3	2.38	.088	"	"	
03	"	8.0	1.8	.135	"	"	
04	"	10.0	1.5	.27	"	"	
05	"	12.6	1.18	.32	"	"	
06	"	14.0	1.07	.35	"	"	
07	"	16.0	.94	.54	"	"	
08	"	18.0	.832	.74	"	"	
09	"	20.0	.750	1.4	"	"	
10	"	22.0	.680	.92	"	"	
11	"	25.0	.600	1.3	"	"	
12	"	28.0	.535	1.83	"	"	
13	"	31.0	.485	1.62	"	"	
14	"	35.0	.428	2.28	"	"	
15	"	39.0	.384	2.54	"	"	
16	"	43.0	.348	2.85	"	"	
17	"	48.0	.312	4.05	"	"	
18	"	55.0	.262	7.2	"	"	
19	"	63.0	.238	6.51	"	"	
20	"	70.0	.214	9.4	"	"	
21	"	80.0	.198	13.4	"	"	
22	"	90.0	.166	15.9	"	"	
23	"	100.0	.150	16.8	"	"	
24	"	110.0	.136	22.1	"	"	
25	"	123.0	.122	30.7	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/340-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
26	115 V, 400 Hz	138.0	.108	36.0	5	130°C	See MIL-T-27/340
27	"	157.0	.095	53.0	"	"	
28	"	175.0	.085	56.0	"	"	
29	"	200.0	.071	65.0	"	"	
30	"	220.0	.068	91.5	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/341-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 V, 400 Hz	5.0	4.8	.037	5	130°C	See MIL-T-27/341
02	"	6.3	3.8	.057	"	"	
03	"	8.0	3.0	.091	"	"	
04	"	10.0	2.4	.140	"	"	
05	"	12.6	1.9	.175	"	"	
06	"	14.0	1.7	.26	"	"	
07	"	16.0	1.5	.38	"	"	
08	"	18.0	1.33	.44	"	"	
09	"	20.0	1.2	.48	"	"	
10	"	22.0	1.09	.63	"	"	
11	"	25.0	.96	.73	"	"	
12	"	28.0	.855	1.07	"	"	
13	"	31.0	.772	1.5	"	"	
14	"	35.0	.685	1.7	"	"	
15	"	39.0	.615	2.4	"	"	
16	"	43.0	.556	2.6	"	"	
17	"	48.0	.500	3.6	"	"	
18	"	55.0	.435	3.83	"	"	
19	"	63.0	.380	6.0	"	"	
20	"	70.0	.342	6.8	"	"	
21	"	80.0	.300	9.6	"	"	
22	"	90.0	.267	13.8	"	"	
23	"	100.0	.240	14.4	"	"	
24	"	110.0	.218	19.5	"	"	
25	"	123.0	.195	21.9	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/341-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
26	115 V, 400 Hz	138.0	.174	30.3	5	130°C	See MIL-T-27/341
27	"	157.0	.152	36.1	"	"	
28	"	175.0	.136	49.5	"	"	
29	"	200.0	.120	57.0	"	"	
30	"	220.0	.109	79.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/342-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 V, 400 Hz	5.0	16.0	.0051	5	130°C	See MIL-T-27/342
02	"	6.3	12.8	.0055	"	"	
03	"	8.0	10.0	.014	"	"	
04	"	10.0	8.0	.021	"	"	
05	"	12.6	6.35	.025	"	"	
06	"	14.0	5.6	.028	"	"	
07	"	16.0	5.0	.041	"	"	
08	"	18.0	4.45	.062	"	"	
09	"	20.0	4.0	.09	"	"	
10	"	22.0	3.63	.096	"	"	
11	"	25.0	3.2	.13	"	"	
12	"	28.0	2.85	.14	"	"	
13	"	31.0	2.47	.16	"	"	
14	"	35.0	2.28	.23	"	"	
15	"	39.0	2.05	.32	"	"	
16	"	43.0	1.86	.35	"	"	
17	"	48.0	1.66	.40	"	"	
18	"	55.0	1.45	.54	"	"	
19	"	63.0	1.27	.79	"	"	
20	"	70.0	1.14	.87	"	"	
21	"	80.0	1.0	1.0	"	"	
22	"	90.0	.89	1.08	"	"	
23	"	100.0	.80	1.64	"	"	
24	"	110.0	.728	2.03	"	"	
25	"	123.0	.65	2.35	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/342-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
26	115 V, 400 Hz	138.0	.58	3.55	5	130°C	See MIL-T-27/342
27	"	157.0	.508	3.95	"	"	
28	"	175.0	.455	5.5	"	"	
29	"	200.0	.400	6.3	"	"	
30	"	220.0	.364	9.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/343-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
01	115 V, 400 Hz	5.0	35.0	.0020	5	130°C	See MIL-T-27/343
02	"	6.3	27.8	.0026	"	"	
03	"	8.0	22.0	.0046	"	"	
04	"	10.0	17.5	.0053	"	"	
05	"	12.6	13.9	.011	"	"	
06	"	14.0	12.5	.013	"	"	
07	"	16.0	10.9	.014	"	"	
08	"	18.0	9.7	.015	"	"	
09	"	20.0	8.75	.017	"	"	
10	"	22.0	7.9	.018	"	"	
11	"	25.0	7.0	.035	"	"	
12	"	28.0	6.25	.049	"	"	
13	"	31.0	5.65	.052	"	"	
14	"	35.0	5.0	.098	"	"	
15	"	39.0	4.48	.110	"	"	
16	"	43.0	4.06	.114	"	"	
17	"	48.0	3.65	.160	"	"	
18	"	55.0	3.17	.196	"	"	
19	"	63.0	2.77	.20	"	"	
20	"	70.0	2.5	.25	"	"	
21	"	80.0	2.18	.34	"	"	
22	"	90.0	1.94	.38	"	"	
23	"	100.0	1.75	.52	"	"	
24	"	110.0	1.59	.72	"	"	
25	"	123.0	1.42	.81	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/343-	Primary voltage (volts)	Secondary voltage (3-5) (V rms) ±5% (CT)	Secondary current (3-5) (amperes)	Secondary DCR (3-5) (ohms) ±25%	Grade	Operating temperature (max)	Figure and dimensions
26	115 V, 400 Hz	138.0	1.26	1.14	5	130°C	See MIL-T-27/343
27	"	157.0	1.1	1.31	"	"	
28	"	175.0	1.0	1.87	"	"	
29	"	200.0	.875	2.65	"	"	
30	"	220.0	.790	2.92	"	"	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 101

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/350-	Primary voltage (volts)	Secondary voltage 1/ (3-4) (V rms) ±5%	Secondary current (3-4) (amperes rms)	Grade	Operating temperature (max)	Figure and dimensions
01	115	5.0	3.00	5	130°C	See MIL-T-27/350
02	400 Hz	7.0	2.14	"	"	
03	"	10.0	1.50	"	"	
04	"	12.0	1.25	"	"	
05	"	14.0	1.07	"	"	
06	"	17.0	0.88	"	"	
07	"	24.0	0.63	"	"	
08	"	28.0	0.54	"	"	
09	"	34.0	0.44	"	"	
10	"	115.0	0.13	"	"	

1/ One-half of the listed output voltage is available between pins 3 and 5 or 4 and 5.

Dash number M27/351-	Primary voltage (volts)	Secondary voltage 1/ (3-4) (V rms) ±5%	Secondary current (3-4) (amperes rms)	Grade	Operating temperature (max)	Figure and dimensions
01	115	5.0	5.00	5	130°C	See MIL-T-27/351
02	400 Hz	7.0	3.57	"	"	
03	"	10.0	2.50	"	"	
04	"	12.0	2.08	"	"	
05	"	14.0	1.79	"	"	
06	"	17.0	1.47	"	"	
07	"	24.0	1.04	"	"	
08	"	28.0	0.89	"	"	
09	"	34.0	0.74	"	"	
10	"	115.0	0.21	"	"	

1/ One-half of the listed output voltage is available between pins 3 and 5 or 4 and 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER

(STEP-DOWN AND STEP-UP, STEP-DOWN, AND STEP-UP)

Dash number M27/352-	Primary voltage (volts)	Secondary voltage 1/ (3-4) (V rms) ±5%	Secondary current (3-4) (amperes rms)	Grade	Operating temperature (max)	Figure and dimensions
01	115 V, 400 Hz	5.0	10.00	5	130°C	See MIL-T-27/352
02	"	7.0	7.14	"	"	
03	"	10.0	5.00	"	"	
04	"	12.0	4.17	"	"	
05	"	14.0	3.57	"	"	
06	"	17.0	2.94	"	"	
07	"	24.0	2.08	"	"	
08	"	28.0	1.79	"	"	
09	"	34.0	1.47	"	"	
10	"	115.0	0.43	"	"	

1/ One-half of the listed output voltage is available between pins 3 and 5 or 4 and 5.

Dash number M27/353-	Primary voltage (volts)	Secondary voltage 1/ (3-4) (V rms) ±5%	Secondary current (3-4) (amperes rms)	Grade	Operating temperature (max)	Figure and dimensions
01	115 V, 400 Hz	7.0	10.00	5	130°C	See MIL-T-27/353
02	"	10.0	7.50	"	"	
03	"	12.0	6.25	"	"	
04	"	14.0	5.36	"	"	
05	"	17.0	4.41	"	"	
06	"	24.0	3.13	"	"	
07	"	28.0	2.68	"	"	
08	"	34.0	2.21	"	"	
09	"	115.0	0.65	"	"	

1/ One-half of the listed output voltage is available between pins 3 and 5 or 4 and 5.

Dash number M27/354-	Primary voltage (volts)	Secondary voltage 1/ (3-4) (V rms) ±5%	Secondary current (3-4) (amperes rms)	Grade	Operating temperature (max)	Figure and dimensions
01	115 V, 400 Hz	10.0	10.00	5	130°C	See MIL-T-27/354
02	"	12.0	8.33	"	"	
03	"	14.0	7.14	"	"	
04	"	17.0	5.88	"	"	
05	"	24.0	4.17	"	"	
06	"	28.0	3.57	"	"	
07	"	34.0	2.94	"	"	
08	"	115.0	0.87	"	"	

1/ One-half of the listed output voltage is available between pins 3 and 5 or 4 and 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


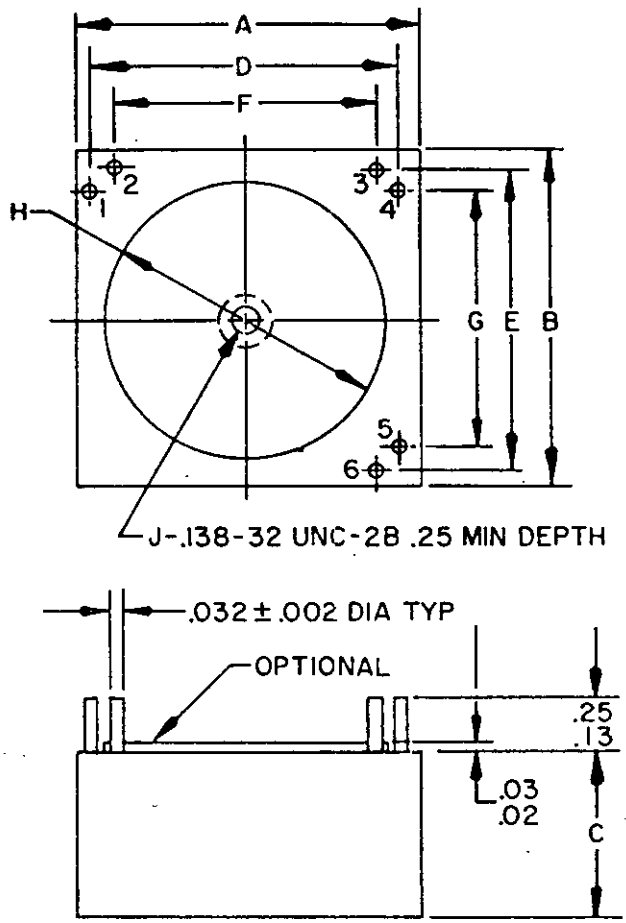


FIGURE 101-1. Outline configuration for MIL-T-27/37 through 27/47.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

Power transformers

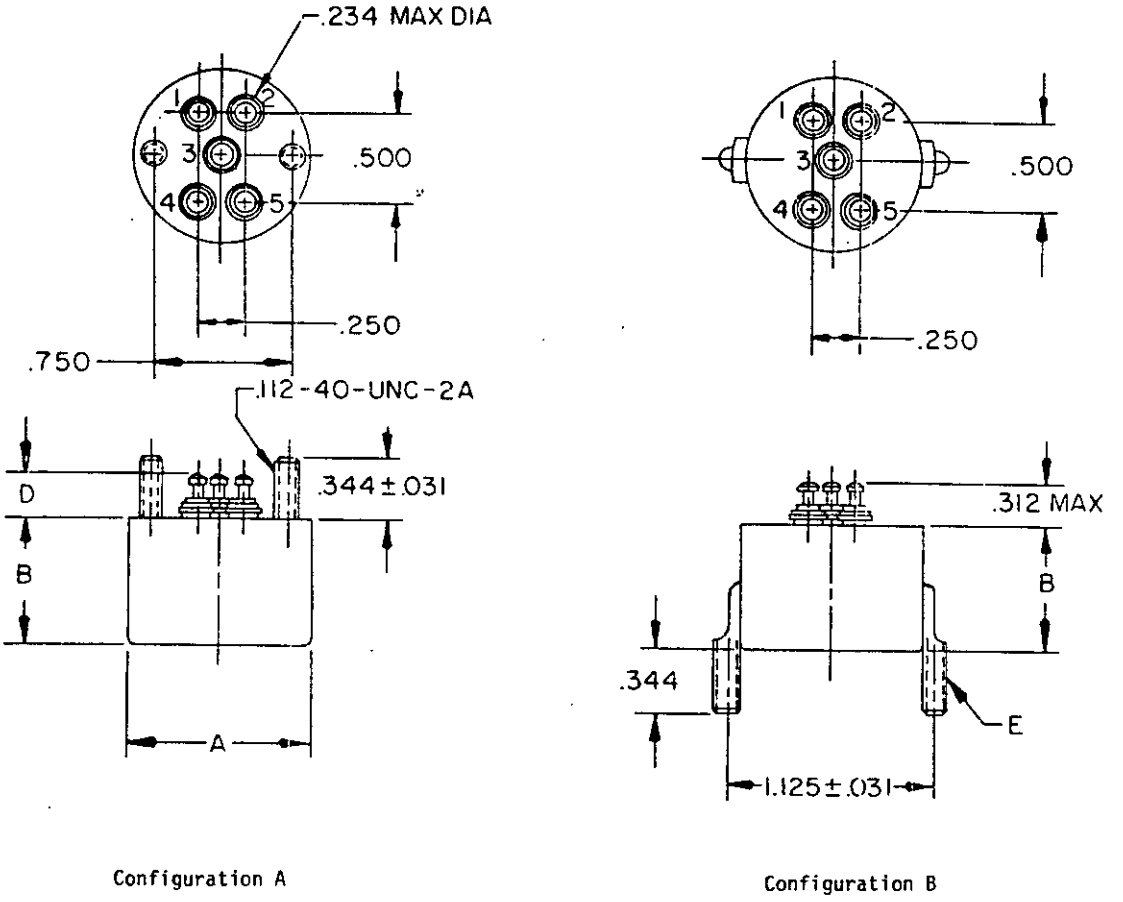

Configuration A

Configuration B

FIGURE 101-2. Outline configurations for MIL-T-27/48 through /56, /61 and /62.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

Power transformers

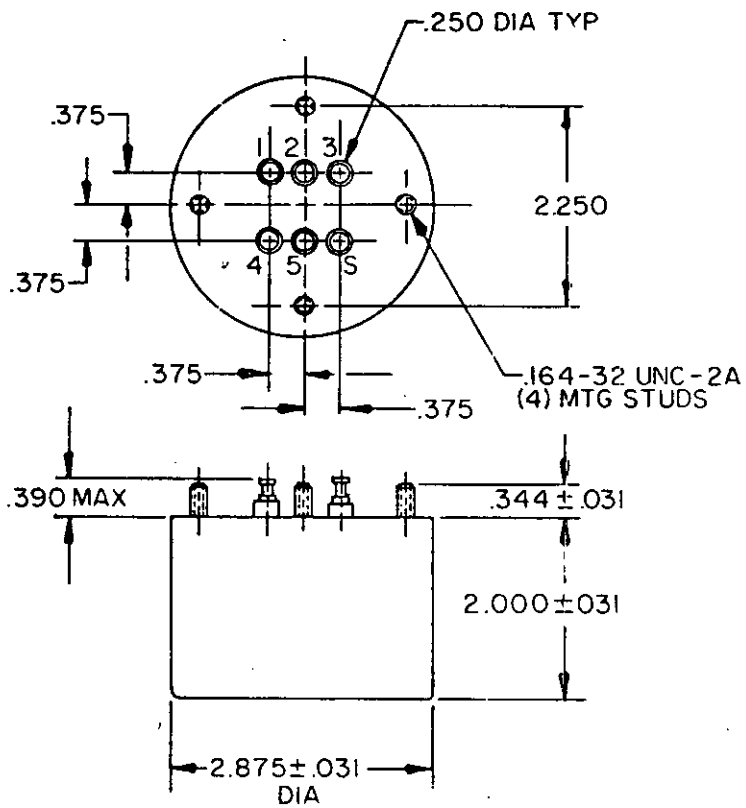


FIGURE 101-3. Outline configuration for MIL-T-27/60 and /66.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Power transformers - Continued

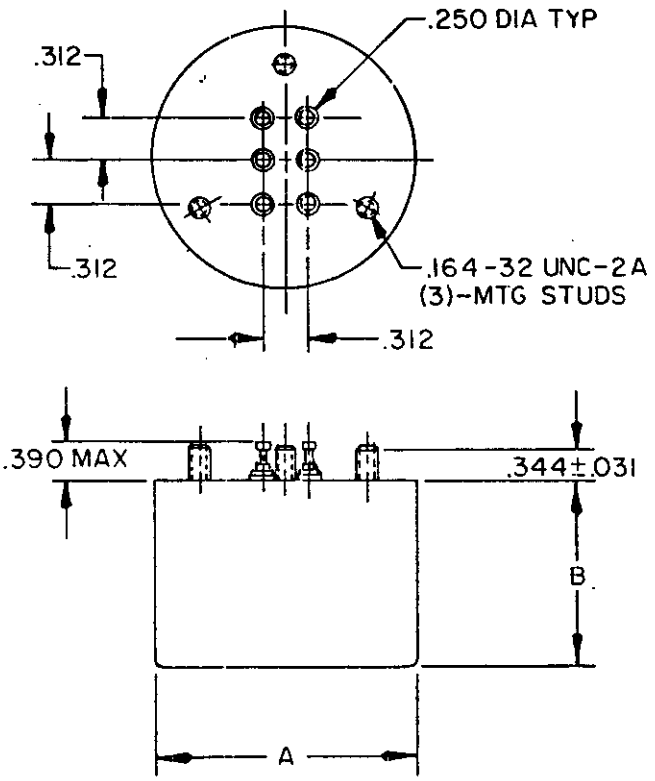



FIGURE 101-4. Outline configuration for MIL-T-27/57 through /59, /63, /64 and /65.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


SECTION 102

TRANSFORMERS, AUDIO FREQUENCY

Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/1 -02	4K	8	2W at 1 kHz	±2 dB (over frequency range 250 to 5000 Hz)	4	130°C	
MIL-T-27/2 -02	600	8	2W at 1 kHz	±2 dB (250 to 5000 Hz)	4	130°C	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY

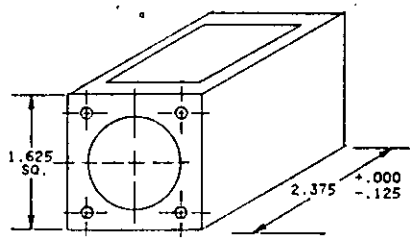Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/3 -01A, -01B	10,000 CT	22,500 CT 90,000 CT	+15 dBm max -8 dBm min	±2 dB (300 to 10,000 Hz)	4	105°C	
MIL-T-27/4 -01A, -01B	600 CT 150 SPLIT	16 8 4	2 W max .1 W min	"	"	"	
MIL-T-27/5 -01A, -01B	600 CT 150 SPLIT	135,000 CT	+15 dB max -8 dB min	"	"	"	
MIL-T-27/6 -01A, -01B	600 CT 150 SPLIT	600 CT 150 SPLIT	+15 dB max -8 dB min	"	"	"	
MIL-T-27/7 -01A, -01B	7,600 4,800	600 CT 150 SPLIT	2 W max .1 W min	"	"	"	
MIL-T-27/8 -01A, -01B	7,600 4,800	16 8 4	2 W max .1 W min	"	"	"	
MIL-T-27/9 -01A, -01B	15,000 CT	600 CT 150 SPLIT	2 W max .1 W min	"	"	"	
MIL-T-27/10 -01A, -01B	24,000 CT	600 CT 150 SPLIT	2 W max .1 W min	"	"	"	


Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY

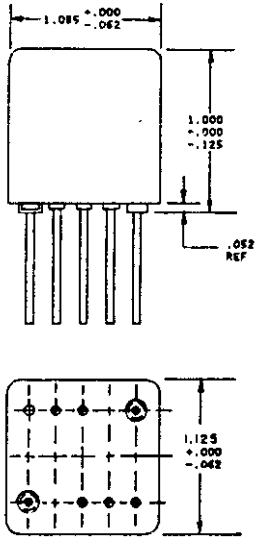Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/67-01	10K CT	10K CT	500 at 60 Hz	±1 dB (60 Hz to 10 kHz)	5	130°C	
MIL-T-27/67-02	10K CT	600 CT	"	"	"	"	
MIL-T-27/67-03	10K CT	4	"	"	"	"	
MIL-T-27/67-04	1.5K CT	15	"	"	"	"	
MIL-T-27/67-05	1K CT	600 CT	"	"	"	"	
MIL-T-27/67-06	1K CT	4	"	"	"	"	
MIL-T-27/67-07	600 CT	600 CT	"	"	"	"	
MIL-T-27/67-08	600 CT	60 CT	"	"	"	"	
MIL-T-27/67-09	600 CT	15	"	"	"	"	
MIL-T-27/67-10	600 CT	4	"	"	"	"	
MIL-T-27/67-11	250 CT	600 CT	"	"	"	"	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/68-01	10K CT	10K CT	500 at 100 Hz	±1 dB (100 Hz to 8 kHz)	5	130°C	
MIL-T-27/68-02	10K CT	600 CT	"	±1 dB (100 Hz to 10 kHz)	"	"	
MIL-T-27/68-03	10K CT	4	"	"	"	"	
MIL-T-27/68-04	1.5K CT	15	"	"	"	"	
MIL-T-27/68-05	1K CT	600 CT	"	"	"	"	
MIL-T-27/68-06	1K CT	4	"	"	"	"	
MIL-T-27/68-07	600 CT	25K CT	"	"	"	"	
MIL-T-27/68-08	600 CT	600 CT	"	"	"	"	
MIL-T-27/68-09	600 CT	60	"	"	"	"	
MIL-T-27/68-10	600 CT	15	"	"	"	"	
MIL-T-27/68-11	600 CT	4	"	"	"	"	
MIL-T-27/68-12	250 CT	600 CT	"	"	"	"	

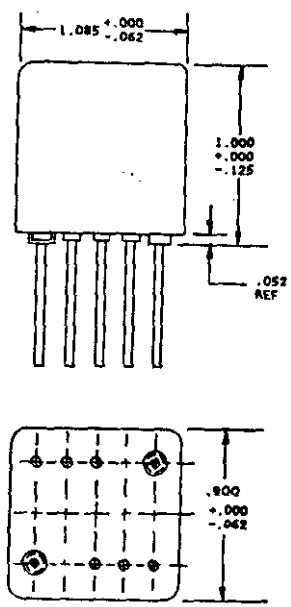



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/69-01	25K CT	1K CT	500 at 200 Hz	±1 dB (200 Hz to 20 kHz)	5	130°C	
MIL-T-27/69-02	10K CT	10K CT	"	"	"	"	
MIL-T-27/69-03	10K CT	1.5K CT	"	"	"	"	
MIL-T-27/69-04	10K CT	600 CT	"	"	"	"	
MIL-T-27/69-05	10K CT	4	"	"	"	"	
MIL-T-27/69-06	4K CT	10K CT	"	"	"	"	
MIL-T-27/69-07	1.5K CT	15	"	"	"	"	
MIL-T-27/69-08	1K CT	600 CT	"	"	"	"	
MIL-T-27/69-09	1K CT	4	"	"	"	"	
MIL-T-27/69-10	600 CT	25K CT	"	"	"	"	
MIL-T-27/69-11	600 CT	600 CT	"	"	"	"	
MIL-T-27/69-12	600 CT	60	"	"	"	"	
MIL-T-27/69-13	600 CT	15	"	"	"	"	
MIL-T-27/69-14	600 CT	4	"	"	"	"	
MIL-T-27/69-15	250 CT	600 CT	"	"	"	"	
MIL-T-27/70-01	100K CT	1K CT	60 at 200 Hz	±1 dB (200 Hz to 15 kHz)	"	"	
MIL-T-27/70-02	25K CT	1K CT	150 at 200 Hz	±1 dB (200 Hz to 50 kHz)	"	"	
MIL-T-27/70-03	10K CT	10K CT	"	"	"	"	
MIL-T-27/70-04	10K CT	1.5K CT	"	"	"	"	
MIL-T-27/70-05	10K CT	600 CT	"	"	"	"	
MIL-T-27/70-06	4K CT	10K CT	"	"	"	"	
MIL-T-27/70-07	1K CT	600 CT	"	"	"	"	
MIL-T-27/70-08	1K CT	4	"	"	"	"	
MIL-T-27/70-09	600 CT	25K CT	"	"	"	"	
MIL-T-27/70-10	600 CT	600 CT	"	"	"	"	
MIL-T-27/70-11	600 CT	60	"	"	"	"	
MIL-T-27/70-12	600 CT	4	"	"	"	"	










Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


TRANSFORMERS, AUDIO FREQUENCY


Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/71-01	100K CT	1K CT	10 at 300 Hz	±2 dB (300 Hz to 20 kHz)	5	130°C	
MIL-T-27/71-02	25K CT	1K CT	10 at 300 Hz	±2 dB (300 Hz to 20 kHz)	"	"	
MIL-T-27/71-03	10K CT	10K CT	30 at 300 Hz	±1 dB (300 Hz to 100 kHz)	"	"	
MIL-T-27/71-04	10K CT	1.5K CT	"	"	"	"	
MIL-T-27/71-05	10K CT	600 CT	"	"	"	"	
MIL-T-27/71-06	4K CT	10K CT	"	"	"	"	
MIL-T-27/71-07	1K CT	600 CT	"	"	"	"	
MIL-T-27/71-08	1K CT	4	"	"	"	"	
MIL-T-27/71-09	600 CT	25K CT	"	"	"	"	
MIL-T-27/71-10	600 CT	600 CT	"	"	"	"	
MIL-T-27/71-11	600 CT	60	"	"	"	"	
MIL-T-27/71-12	600 CT	4	"	"	"	"	
MIL-T-27/72-01	100K CT	1K CT	10 at 300 Hz	±2 dB (300 Hz to 40 kHz)	"	"	
MIL-T-27/72-02	25K CT	1K CT	50 at 300 Hz	±2 dB (300 Hz to 100 kHz)	"	"	
MIL-T-27/72-03	25K CT	600 CT	"	"	"	"	
MIL-T-27/72-04	10K CT	10K CT	"	"	"	"	
MIL-T-27/72-05	10K CT	1.5K CT	"	"	"	"	
MIL-T-27/72-06	10K CT	600 CT	"	"	"	"	
MIL-T-27/72-07	1K CT	600 CT	"	"	"	"	
MIL-T-27/72-08	600 CT	600 CT	"	"	"	"	
MIL-T-27/72-09	600 CT	60 CT	"	"	"	"	

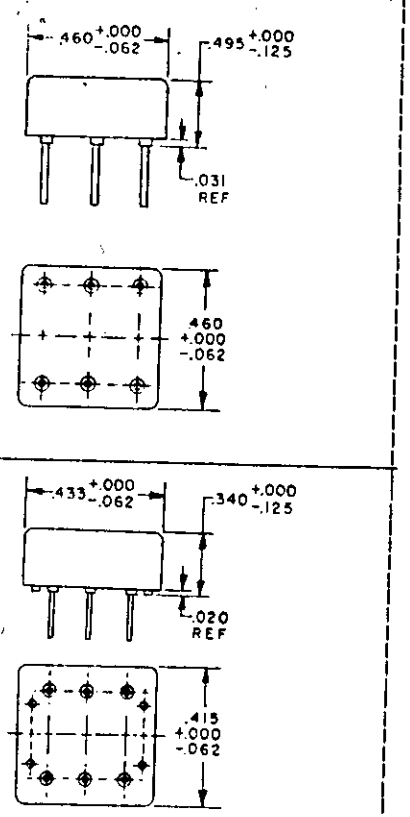

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.



Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/76-01 1/	200K CT	1K CT	25 to 1 kHz	±3 dB (300 Hz to 20 kHz)	S	105°C	
MIL-T-27/76-02	20K CT 30K CT	800 CT 1.2K CT	50 at 1 kHz	"	"	"	
MIL-T-27/76-03	10K CT 12K CT	10K CT 12K CT	100 at 1 kHz	"	"	"	
MIL-T-27/76-04	10K 12K	2K 2.5K		"	"	"	
MIL-T-27/76-05	10K CT 12K CT	2K split 2.4K split		"	"	"	
MIL-T-27/76-06	10K CT 12K CT	1.5K CT 1.8K CT		"	"	"	
MIL-T-27/76-07	1K CT 1200 CT	50 60		"	"	"	
MIL-T-27/79-01	10K CT	600 CT	.6 W (200 Hz to 10 kHz) .25 W (60 Hz to 200 Hz)	±1 dB (60 Hz to 10 kHz)	S	130°C	

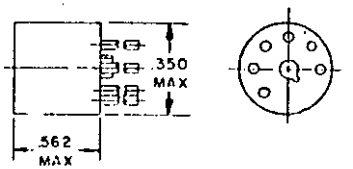

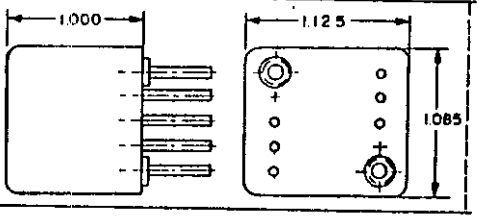

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

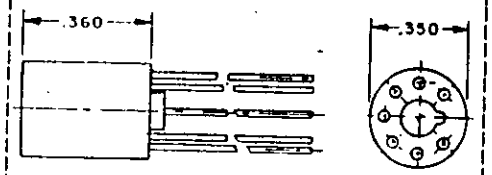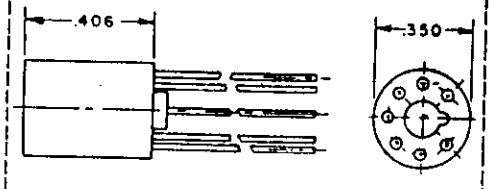Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/97-01	2K CT	8K	125	±3 dB (400 Hz to 100 kHz)	5	105°C	
MIL-T-27/103-01	10K CT 1/ 12K CT	10K CT 1/ 12K CT	100 at 1 kHz	±3 dB (400 Hz to 100 kHz)	"	"	
MIL-T-27/103-02	20K CT 30K CT	800 CT 1.2K CT	50 at 1 kHz	"	"	"	
MIL-T-27/103-03	10K CT 12.5K CT	2K split 2.5K split	100 at 1 kHz	"	"	"	
MIL-T-27/103-04	10K CT 12K CT	2K CT 2.4K CT	"	"	"	"	
MIL-T-27/103-05	10K CT 12.5K CT	1.2K CT 1.5K CT	"	"	"	"	
MIL-T-27/103-06	10K CT 12K CT	500 CT 600 CT	"	"	"	"	
MIL-T-27/103-07	2K CT 2.5K CT	8K split 10K split	"	"	"	"	
MIL-T-27/103-08	1.5K CT	600 CT	500 at 1 kHz	"	"	"	
MIL-T-27/103-09	1K CT 1.2K CT	50 CT 60 CT	"	"	"	"	
MIL-T-27/103-10	500 CT	600 CT	"	"	"	"	
MIL-T-27/103-11	500 CT 600 CT	50 CT 60 CT	"	"	"	"	
MIL-T-27/103-12	400 CT 500 CT	400 split 500 split	"	"	"	"	
MIL-T-27/103-13	400 CT 500 CT	40 split 50 split	"	"	"	"	
MIL-T-27/103-14	300 CT	600 CT	"	"	"	"	
MIL-T-27/103-15	80 CT 100 CT	32 split 40 split	"	"	"	"	

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:43Z
Check the source to verify that this is the current version before use.


Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/125-01	15 CT	100K	.001	±3 dB (10 kHz to 20 kHz)	5	130°C	.435 MAX, .420 MAX, .479 MAX

Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/144-01	80 CT	32 split	600 at 1 kHz	±3 dB (200 Hz to 100 kHz)	5	105°C	.035, .344 MAX, .469
MIL-T-27/144-02	300 CT	600	"	"	"	"	
MIL-T-27/144-03	400 CT	40 split	"	"	"	"	
MIL-T-27/144-04	400 CT	400 split	"	"	"	"	
MIL-T-27/144-05	400 CT	4K CT	"	"	"	"	
MIL-T-27/144-06	500	50	"	"	"	"	
MIL-T-27/144-07	500 CT	600	"	"	"	"	
MIL-T-27/144-08	600 CT	600 CT	"	"	"	"	
MIL-T-27/144-09	900 CT	600	"	"	"	"	
MIL-T-27/144-10	1K	50	"	"	"	"	
MIL-T-27/144-11	1.2K	3.2	"	"	"	"	
MIL-T-27/144-12	1.5K CT	600	"	"	"	"	
MIL-T-27/144-13	2K CT	2K split	"	"	"	"	
MIL-T-27/144-14	2K CT	8K split	125 at 1 kHz	"	"	"	
MIL-T-27/144-15	10K	500 CT	"	"	"	"	
MIL-T-27/144-16	10K	1.2K CT	"	"	"	"	
MIL-T-27/144-17	10K CT	1.5K CT	"	"	"	"	
MIL-T-27/144-18	10K CT	2K split	"	"	"	"	
MIL-T-27/144-19	10K CT	2K CT	"	"	"	"	
MIL-T-27/144-20	10K CT	10K CT	"	"	"	"	
MIL-T-27/144-21	20K	800	60 at 1 kHz	"	"	"	
MIL-T-27/144-22	20K CT	800 CT	60 at 1 kHz	"	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY


Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/165-01	50 CT* 100 CT	32 split* 40 split	250 at 1 kHz	±3 dB (200 Hz to 20 kHz)	5	105°C	
MIL-T-27/165-02	200*	250K*	10 at 1 kHz	"	"	"	
MIL-T-27/165-03	400 CT* 500 CT	40 split* 50 split	250 at 1 kHz	"	"	"	
MIL-T-27/165-04	400 CT* 500 CT	120 split* 150 split	"	"	"	"	
MIL-T-27/165-05	400 CT* 500 CT	400 split* 500 split	"	"	"	"	
MIL-T-27/165-06	500 CT*	3.2*	"	"	"	"	
MIL-T-27/165-07	600 CT*	600 split*	"	"	"	"	
MIL-T-27/165-08	600 split*	10K CT*	"	"	"	"	
MIL-T-27/165-09	2K CT* 4K CT	8* 16	"	"	"	"	
MIL-T-27/165-10	2.5K CT*	2.5K split*	"	"	"	"	
MIL-T-27/165-11	10K* 25K	200* 500	200 at 1 kHz	"	"	"	
MIL-T-27/165-12	10K*	2K CT*	"	"	"	"	
MIL-T-27/165-13	10K CT* 12K CT	10K split* 12K split	"	"	"	"	
MIL-T-27/165-14	10K*	90K*	100 at 1 kHz	"	"	"	
MIL-T-27/165-15	20K* 30K	800* 1200	200 at 1 kHz	"	"	"	
MIL-T-27/165-16	30 K*	50*	200 at 1 kHz	"	"	"	
MIL-T-27/165-17	50K CT*	600 split*	250 at 1 kHz	"	"	"	
MIL-T-27/165-18	100K*	60*	250 at 1 kHz	"	"	"	

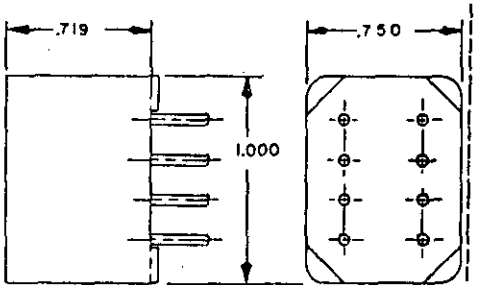

*Transformer's windings can be used arbitrarily as primary or secondary.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/166-01	82	135K	63 at 1 kHz	±2 dB (250 Hz to 8000 Hz)	4	105°C	
MIL-T-27/166-02	50,200 CT, 500 CT	50K	3 at 1 kHz	±2 dB (50 Hz to 10 kHz)	"	"	
MIL-T-27/166-03	50,200 CT, 500 CT	50K CT	3 at 1 kHz	±2 dB (50 Hz to 10 kHz)	"	"	
MIL-T-27/166-04	500 split	150 split	250 at 100 Hz; 1 W at 200 Hz	±2 dB (100 Hz to 20 kHz)	"	"	
MIL-T-27/166-05	500 split	500 split	250 at 100 Hz; 1 W at 200 Hz	±2 dB (100 Hz to 20 kHz)	"	"	
MIL-T-27/166-06	600 split	600 CT	6.3 at 1 kHz	±2 dB (50 Hz to 10 kHz)	"	"	
MIL-T-27/166-07	600 split	2K split	31 at 1 kHz	±2 dB (50 Hz to 20 kHz)	"	"	
MIL-T-27/166-08	600 split	1M	10 at 1 kHz	±4 dB (200 Hz to 3 kHz)	"	"	
MIL-T-27/166-09	1.5K CT	500 split	100 at 1 kHz	±2 dB (100 Hz to 10 kHz)	"	"	
MIL-T-27/166-10	2K CT 4K CT	8 16	"	"	"	"	
MIL-T-27/166-11	10K CT	500 split	"	"	"	"	
MIL-T-27/166-12	10K split	2K split	"	"	"	"	
MIL-T-27/166-13	10K split	4K split	"	"	"	"	
MIL-T-27/166-14	10K	1M	10 at 1 kHz	±4 dB (200 Hz 3 kHz)	"	"	
MIL-T-27/166-15	15K	60K	4 at 1 kHz	±2 dB (50 Hz to 10 kHz)	"	"	
MIL-T-27/166-16	15K	60K	25 at 1 kHz	±2 dB (200 Hz to 10 kHz)	"	"	
MIL-T-27/166-17	15K	95K CT	3 at 1 kHz	±2 dB (50 Hz to 10 kHz)	"	"	
MIL-T-27/166-18	15K	95K split	12 at 1 kHz	±2 dB (200 Hz to 10 kHz)	"	"	
MIL-T-27/166-19	20K CT	600 split	125 at 1 kHz	±2 dB (200 Hz to 10 kHz)	"	"	

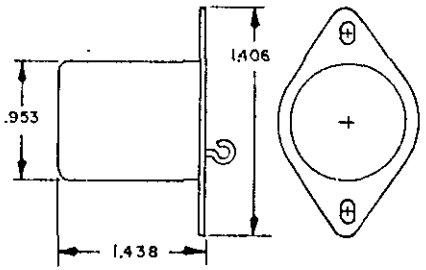

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY

Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/167-01 1/	10K 25K	200 500	100 at 1 kHz	±3 dB (300 Hz to 20 kHz)	5	105°C	
MIL-T-27/167-02	50 200	62.5K 250K	5 at 1 kHz	"	"	"	
MIL-T-27/167-03	100 split	100 split	100 at 1 kHz	"	"	"	
MIL-T-27/167-04	500 split 600 split	12.8 split 16 split	"	"	"	"	
MIL-T-27/167-05	500 600	50 60	"	"	"	"	
MIL-T-27/167-06	500 split 600 split	50 split 60 split	"	"	"	"	
MIL-T-27/167-07	500 CT	600 CT	"	"	"	"	.563 MAX .750 MAX
MIL-T-27/167-08	500 split	600 split	"	"	"	"	
MIL-T-27/167-09	600 CT	600 split	"	"	"	"	
MIL-T-27/167-10	600 CT	2K split	"	"	"	"	.875 MAX
MIL-T-27/167-11	600	600 CT and 600 CT	25 at 1 kHz	"	"	"	
MIL-T-27/167-12	600 split	8K CT	50 at 1 kHz	"	"	"	
MIL-T-27/167-13	800 split 1200 split	20K split 30K split	50 at 1 kHz	"	"	"	
MIL-T-27/167-14	1K 1.5K	50 60	100 at 1 kHz	"	"	"	
MIL-T-27/167-15	1K split 1200 split	200 split 240 split	"	"	"	"	
MIL-T-27/167-16	1200 1500	3.2 4.0	"	"	"	"	
MIL-T-27/167-17	1.5K CT	600 CT	"	"	"	"	
MIL-T-27/167-18	4K CT	600 split	"	"	"	"	
MIL-T-27/167-19	4K split 5K split	12.8 split 16 split	"	"	"	"	
MIL-T-27/167-20	10K	3.2	"	"	"	"	
MIL-T-27/167-21	8K split 10K split	12.8 split 16 split	"	"	"	"	
MIL-T-27/167-22	10K	16	"	"	"	"	

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


TRANSFORMERS, AUDIO FREQUENCY

Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/167-23 1/	10K CT 12K CT	3.2 4.0	100 at 1 kHz	±3 dB (300 Hz to 20 kHz)	5	105°C	See figure for MIL-T-27/167-01 through -22 on page 102.12
MIL-T-27/167-24	10K split 25K split	200 split 500 split	"	"	"	"	
MIL-T-27/167-25	10K CT 25K CT	200 CT 500 CT	"	"	"	"	
MIL-T-27/167-26	10K 12K	500 CT 600 CT	"	"	"	"	
MIL-T-27/167-27	10K split 12K split	500 split 600 split	"	"	"	"	
MIL-T-27/167-28	10K CT	2K CT	"	"	"	"	
MIL-T-27/167-29	10K CT 12K CT	1500 CT 1800 CT	"	"	"	"	
MIL-T-27/167-30	10K CT 12K CT	10K CT 12K CT	"	"	"	"	
MIL-T-27/167-31	10K split 12K split	10K split 12K split	"	"	"	"	
MIL-T-27/167-32	10K	90K	30 at 1 kHz	"	"	"	
MIL-T-27/167-33	20K 30K	800 1200	100 at 1 kHz	"	"	"	
MIL-T-27/167-34	20K CT 30K CT	800 CT 1200 CT	"	"	"	"	
MIL-T-27/167-35	30K	50	"	"	"	"	
MIL-T-27/167-36	40K CT 50K CT	400 split 500 split	"	"	"	"	
MIL-T-27/167-37	40K split 50K split	400 split 500 split	"	"	"	"	
MIL-T-27/167-38	100K	60	"	"	"	"	
MIL-T-27/167-39	100K CT 200K CT	100 split 200 split	5 at 1 kHz	"	"	"	
MIL-T-27/167-40	200K	1K	"	"	"	"	
MIL-T-27/167-41	200K CT	1K CT	"	"	"	"	
MIL-T-27/167-42	200K CT	1K split	"	"	"	"	

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
1/ MIL-T-27/172-01	80 CT 100 CT	32 split 40 split	600 at 1 kHz	±3 dB (300 Hz to 100 kHz)	S	105°C	
MIL-T-27/172-02	120 CT 150 CT	3.2 4.0	500 at 1 kHz	"	"	"	
MIL-T-27/172-03	150 CT 200 CT	12 16	"	"	"	"	
MIL-T-27/172-04	300 CT 400 CT	12 16	"	"	"	"	
MIL-T-27/172-05	300 CT	600	"	"	"	"	
MIL-T-27/172-06	320 CT 400 CT	3.2 4.0	"	"	"	"	
MIL-T-27/172-07	400 CT 500 CT	40 split 50 split	"	"	"	"	
MIL-T-27/172-08	400 CT 500 CT	120 split 150 split	"	"	"	"	
MIL-T-27/172-09	400 CT 500 CT	400 split 500 split	"	"	"	"	
MIL-T-27/172-10	400 CT 500 CT	4K CT 5K CT	"	"	"	"	
MIL-T-27/172-11	500 600	50 60	100 at 1 kHz	"	"	"	
MIL-T-27/172-12	500 CT	600	500 at 1 kHz	"	"	"	
MIL-T-27/172-13	600	3.2	100 at 1 kHz	"	"	"	



1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 102

TRANSFORMERS, AUDIO FREQUENCY

Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/172-14 1/	600 CT 800 CT	12 16	500 at 1 kHz	±3 dB (300 Hz to 100 kHz)	5	105°C	See figure for MIL-T-27/172-01 through -13 on page 102.12
MIL-T-27/172-15	640 CT 800 CT	3.2 4.0	"	"	"	"	
MIL-T-27/172-16	800 CT 1K CT	3.2 4.0	"	"	"	"	
MIL-T-27/172-17	800 CT 1.07K CT	12 16	"	"	"	"	
MIL-T-27/172-18	900 CT	600	600 at 1 kHz	"	"	"	
MIL-T-27/172-19	1K 1.2K	50 60	"	"	"	"	
MIL-T-27/172-20	1K CT 1.25K CT	16K split 20K split	100 at 1 kHz	"	"	"	
MIL-T-27/172-21	1K CT 1.33K CT	12 16	500 at 1 kHz	"	"	"	
MIL-T-27/172-22	1.06K CT 1.33K CT	3.2 4.0	500 at 1 kHz	"	"	"	
MIL-T-27/172-23	1.2K	3.2	600 at 1 kHz	"	"	"	
MIL-T-27/172-24	1.5K CT 2K CT	12 16	500 at 1 kHz	"	"	"	
MIL-T-27/172-25	1.5K CT	600	600 at 1 kHz	"	"	"	
MIL-T-27/172-26	1.6K CT 2K CT	3.2 4.0	500 at 1 kHz	"	"	"	
MIL-T-27/172-27	2K CT 2.5K CT	2K split 2.5K split	600 at 1 kHz	"	"	"	
MIL-T-27/172-28	2K CT 2.5K CT	8K split 10K split	125 at 1 kHz	"	"	"	
MIL-T-27/172-29	7.5K CT 10K CT	12 16	100 at 1 kHz	"	"	"	
MIL-T-27/172-30	8K CT 10K CT	3.2 4.0	"	"	"	"	
MIL-T-27/172-31	10K	3.2	"	"	"	"	
MIL-T-27/172-32	10K 12K	500 CT 600 CT	125 at 1 kHz	"	"	"	
MIL-T-27/172-33	10K 12.5K	1.2K CT 1.5K CT	"	"	"	"	
MIL-T-27/172-34	10K CT 12K CT	1.5K CT 1.8K CT	"	"	"	"	

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY


Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/172-35 1/	10K CT 12K CT	2K split 2.4K split	125 at 1 kHz	±3 dB (300 Hz to 100 kHz)	5	105°C	See figure for MIL-T-27/172-01 through -13 on page 102.14
MIL-T-27/172-36	10K 12.5K	2K split 2.5K split	"	"	"	"	
MIL-T-27/172-37	10K CT 12K CT	10K CT 12K CT	"	"	"	"	
MIL-T-27/172-38	20K 30K	800 1.2K	60 at 1 kHz	"	"	"	
MIL-T-27/172-39	20K CT 30K CT	800 CT 1.2K CT	60 at 1 kHz	"	"	"	
MIL-T-27/172-40	20K CT 30K CT	1K split 1.5K split	50 at 1 kHz	"	"	"	
MIL-T-27/172-41	40K CT 50K CT	400 split 500 split	"	"	"	"	
MIL-T-27/172-42	40K CT 50K CT	4K CT 5K CT	"	"	"	"	
MIL-T-27/172-43	200K	1K	25 at 1 kHz	±3 dB (300 Hz to 20 kHz)*	"	"	
MIL-T-27/172-44	200K	1K CT	25 at 1 kHz	±3 dB (300 Hz to 20 kHz)*	"	"	
MIL-T-27/172-45	600 CT	600 CT	100 at 1 kHz	±3 dB (300 Hz to 100 kHz)	"	"	
MIL-T-27/172-46	4K CT	8K CT	500 at 1 kHz	"	"	"	
MIL-T-27/172-47	8K CT	1200 CT	"	"	"	"	
MIL-T-27/172-48	9K CT	9K CT	"	"	"	"	
MIL-T-27/172-49	100K CT	500 CT	100 at 1 kHz	±3 dB (300 Hz to 20 kHz)*	"	"	
MIL-T-27/172-50	200K CT	1K CT	100 at 1 kHz	±3 dB (300 Hz to 20 kHz)*	"	"	


* ±4 dB (300 Hz to 100 kHz)

1/ Impedance values written one above the other indicate a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:43Z
Check the source to verify that this is the current version before use.


Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/173-01	25K CT	1K split	40 at 1 kHz	±3 dB (300 Hz to 250 kHz)	5	105°C	
MIL-T-27/173-02	1.5K	600	75 at 1 kHz	"	"	"	
MIL-T-27/173-03	150	12	80 at 1 kHz	"	"	"	
MIL-T-27/173-04	300	600	"	"	"	"	
MIL-T-27/173-05	400	400	"	"	"	"	
MIL-T-27/173-06	500	50	"	"	"	"	
MIL-T-27/173-07	600	600	"	"	"	"	
MIL-T-27/173-08	1K	1K	"	"	"	"	
MIL-T-27/173-09	2K	8K	75 at 1 kHz	"	"	"	
MIL-T-27/173-10	10K	500	"	"	"	"	
MIL-T-27/173-11	10K	1.2K	"	"	"	"	
MIL-T-27/173-12	10K	2K	"	"	"	"	
MIL-T-27/173-13	10K	10K	"	"	"	"	
MIL-T-27/197-01	15K	80K split	200 at 1 kHz	±2 dB (100 Hz to 20 kHz)	4	105°C	
MIL-T-27/197-02	15K split	80K split	15 at 1 kHz	±2 dB (30 Hz to 20 kHz)	"	"	
MIL-T-27/197-03	250 CT 500 CT	50K CT 100K CT	4 at 1 kHz	±2 dB (100 Hz to 20 kHz)	"	"	
MIL-T-27/197-04	15K	500 CT, 200 CT, 125, 50	200 at 1 kHz	±2 dB (50 Hz to 20 kHz)	"	"	
MIL-T-27/197-05	30K split	500 CT, 200 CT, 125, 50	80 at 1 kHz	±2 dB (30 Hz to 20 kHz)	"	"	
MIL-T-27/197-06	500 CT	500 split	1 W at 1 kHz	±2 dB (40 Hz to 20 kHz)	"	"	
MIL-T-27/197-07	10K split	2K split	"	"	"	"	
MIL-T-27/197-08	500 CT	16 split	"	"	"	"	
MIL-T-27/197-09	200 CT	400 split	"	"	"	"	
MIL-T-27/197-10	48 CT	16, 8, 4	5 W at 1 kHz	"	"	"	
MIL-T-27/197-11	20 CT	16, 8, 4	10 W at 1 kHz	±2 dB (75 Hz to 20 kHz)	"	"	




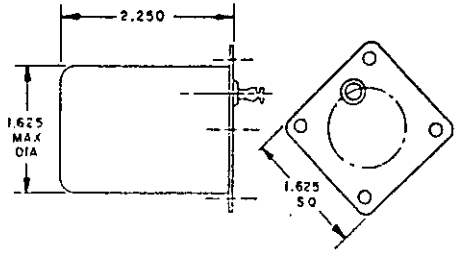



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number	Primary impedance (ohms)	Secondary impedance (ohms)	Maximum primary power level (mW)	Frequency response	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/200-01	30K	50	30 at 1 kHz	±2 dB (300 Hz to 10 kHz)	4	105°C	
MIL-T-27/247-02	10K CT	10K CT	2 watt 200 Hz	±1 dB (200 Hz to 10 kHz)	5	130°C	
-03	"	1.5K CT	"	"	"	"	
-04	"	600 CT	"	"	"	"	
-05	"	3.2	"	"	"	"	
-06	1.5K CT	600 CT	"	"	"	"	
-07	1K CT	"	"	"	"	"	
-08	600 CT	"	"	"	"	"	
-09	"	250 CT	"	"	"	"	
-10	"	150 CT	"	"	"	"	
-11	"	3.2	"	"	"	"	
MIL-T-27/277-01	150 CT	150 CT	1 at 1 kHz	±3 dB (300 Hz to 3 kHz)	5	105°C	
MIL-T-27/307-01	600 SPLIT	600	7	±.3 dB (300 Hz to 4 kHz)	4	85°C	

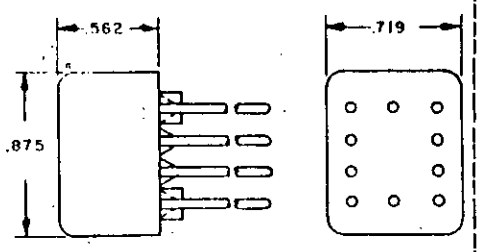

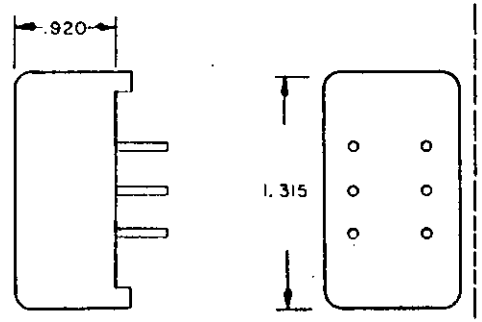

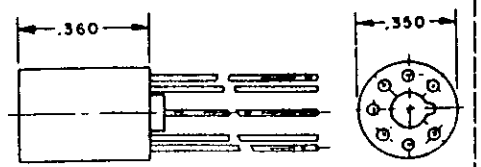


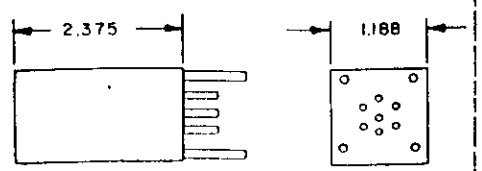


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY


Part number and dash number MIL-T-27/361	Primary impedance (ohms) (1-3)	Secondary impedance (ohms) 1/	Primary dc current (mA)	Power level at 1 kHz (max) (watts)	Frequency response dc	Grade	Maximum operating temperature	
-01	150 CT	150 split (4-7)	11	.6	±3 dB at 300 Hz to 75 kHz	S	130°C	
-02	150 CT	600 split (4-7)	11	"	"	"	"	
-03	600 CT	600 split (4-7)	5.5	"	"	"	"	
-04	600 CT	600 CT (5-7)	5.5	"	"	"	"	
-05	600 CT	1,200 split (4-7)	5.5	"	"	"	"	
-06	2,000 CT	2,000 CT (5-7)	3	"	"	"	"	
-07	2,000 CT	8,000 split (4-7)	3	"	"	"	"	
-08	10,000 CT	10,000 split (4-7)	1.4	"	"	"	"	
-09	10,000 CT	10,000 CT (5-7)	1.4	"	"	"	"	
-10	15,000 CT	600 split (5-7)	1	"	"	"	"	






Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


Part number and dash number MIL-T-27/362	Primary impedance (ohms) (1-3)	Secondary impedance (ohms) 1/	Primary dc current (mA)	Power level at 1 kHz (max) (watts)	Frequency response dc	Grade	Maximum operating temperature	Figure and dimensions
-01	150 CT	150 split (4-7)	8	.1	±3 dB at 150 Hz to 75 kHz	S	130°C	
-02	150 CT	600 split (4-7)	8	"	"	"	"	
-03	600 CT	600 split (4-7)	4	"	"	"	"	
-04	600 CT	600 CT (5-7)	4	"	"	"	"	
-05	600 CT	1,200 split (4-7)	4	"	"	"	"	
-06	2,000 CT	2,000 CT (5-7)	2	"	"	"	"	
-07	2,000 CT	8,000 split (4-7)	2	"	"	"	"	
-08	10,000 CT	10,000 split (4-7)	1	"	"	"	"	
-09	10,000 CT	10,000 CT (5-7)	1	"	"	"	"	
-10	15,000 CT	600 split (4-7)	.8	.66	"	"	"	
-11	20,000 CT	1,000 split (4-7)	.7	.5	"	"	"	
-12	100,000CT	2,000 split (4-7)	.3	.1	"	"	"	






Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number MIL-T-27/363	Primary impedance (ohms) (1-3)	Secondary impedance (ohms) 1/	Primary dc current (mA)	Power level at 1 kHz (max) (watts)	Frequency response dc	Grade	Maximum operating temperature	Figure and dimensions
-01	150 CT	150 split (4-7)	8	2	±3 dB at 50 Hz to 30 kHz	S	130°C	
-02	150 CT	600 split (4-7)	8	"	"	"	"	
-03	600 CT	600 split (4-7)	4	"	"	"	"	
-04	600 CT	600 CT (5-7)	4	"	"	"	"	
-05	600 CT	1,200 split (4-7)	4	"	"	"	"	
-06	2,000 CT	2,000 CT (5-7)	2.2	"	"	"	"	
-07	2,000 CT	8,000 split (4-7)	2.2	"	"	"	"	
-08	10,000 CT	10,000 split (4-7)	1	"	"	"	"	
-09	10,000 CT	10,000 CT (5-7)	1	"	"	"	"	
-10	15,000 CT	600 split (4-7)	.8	.66	"	"	"	
-11	20,000 CT	1,000 split (4-7)	.7	.5	"	"	"	
-12	100,000CT	2,000 split (4-7)	.3	.1	"	"	"	





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, PULSE, LOW POWER

Specification sheet and dash numbers	Impedance (ohms)		Current (mA)		Voltage peak			DCR ±20% (ohms)		Turns ratio	Pulse duration (µs)	Pulse rise time (µs)	Pulse repetition frequency (kHz)	Inductance (mH)	Nominal dimensions (excluding terminals)	Figure
	Source	Load	1-2	3-4	1-2	3-4	5-6	1-2	3-4							
MIL-T-21038/1 -001	10	18	50	300	30 ±3	5.1 ±.5	31 ±3	9.5	.39	5.5: .95	17± 2	1	18 to 30	---	.250 x .229 x .229	
MIL-T-21038/2 -001	---	---	---	---	3	4.7	---	32	40	1:1	60	3.8	100	200 min at 1 V, 1 kHz	.425 x .416 x .372	

Specification sheet and dash numbers	DCR (ohms)			Blocking oscillator pulse		Coupling circuit characteristic				Frequency response ±2 dB		Turns ratio	Nominal dimensions (excluding terminals)	Figure
				Pulse width (µs)	Rise time (µs)	Pulse width (µs)	Volts out	Rise time (µs)	Impedance in, out (ohms)	kHz	MHz			
	1-2	3-4	5-6											
MIL-T-21038/8 -001	3	3.5	4	.05	.022	.05	17	.01	250	260 to 34		1:1:1	.375 x .375 d	
-002	5.5	6.5	7	.10	.024	.10	19	.01	250	220 to 34		1:1:1		
MIL-T-21038/9 -001	3.7	4.0	4	.20	.026	.20	18	.01	500	260 to 93		1:1:1	.563 x .563 d	
-002	5.6	5.8	6	.50	.03	.50	20	.01	500	85 to 73		1:1:1		
-003	8	8.5	9	1	.04	1	24	.02	500	50 to 62.5		1:1:1		
-004	20	21	22	2	.05	2	27	.05	500	24.5 to 49		1:1:1		
-005	28	31	33	3	.10	3	26	.07	500	12.6 to 5.65		1:1:1		
-006	36	41	44	5	.13	5	23	.15	1000	13 to 3.465		1:1:1		


Specification sheet and dash numbers	DCR (ohms)			Blocking oscillator pulse					Coupling circuit characteristics							Frequency response ±2 dB	Figure
				Pluse width (µs)	Rise time (µs)	Over-shoot %	Droop %	Back swing (µs)	Pulse width (µs)	Volts out	Rise time (µs)	Over-shoot (%)	Droop (%)	Back swing (%)	Impedance out, in (ohms)		
MIL-T-21038/11	1-2	3-4	5-6														
-001	42.3	52.1	14.8	10	.14	0	15	28	10	6.5	.4	0	15	30	200	1.1 kHz - 400 kHz	
-002	14.5	17.5	5.4	5	.097	0	23	28	5	7.9	.2	0	18	28	200	3.6 kHz - 840 kHz	
-003	10.2	12	3.6	3	.087	0	18	30	3	6.8	.17	0	10	20	100	3.9 kHz - 950 kHz	
-004	6.2	7.3	2.22	2	.066	0	15	25	2	6.6	.14	0	10	20	100	8.5 kHz - 1.675 MHz	
-005	3.73	4.4	1.33	1	.033	0	12	25	1	7	.078	0	15	23	100	12 kHz - 2.3 MHz	
-006	1.86	2.26	.70	.5	.027	2	10	20	.5	7.5	.045	0	20	25	100	22 kHz - 3.7 MHz	
-007	.78	.94	.33	.2	.022	0	0	18	.2	7.4	.034	0	5	12	100	60 kHz - 14.5 MHz	
-008	.41	.48	.19	.1	.016	0	0	30	.1	8.2	.021	0	0	15	50	95 kHz - 17 MHz	
-009	.124	.14	.05	.05	.016	0	0	30	.05	9.3	.012	0	0	20	50	550 kHz - 43 MHz	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 103

TRANSFORMERS, PULSE, LOW POWER

Part number and dash number M21038/27	Turns ratio	Primary	Secondary	3/ % (max.) droop	4/ CMR (min.)	"A" (max.)	RDC Ω (max)	Impedance ohms (min.)	2/ Configuration
-01	1:1 ±3% 1:.707 ±3%	1-3 1-3	4-8 5-7	20	45 dB	.300	1-3 3.0 4-8 3.0	(1-3) 4,000	A
-02	1.4:1 ±3% 2:1 ±3%	1-3 1-3	4-8 5-7	20	45 dB	.250	1-3 3.5 4-8 3.0	(1-3) 7,200	A
-03	1.25:1 ±3% 1.66:1 ±3%	1-3 1-3	4-8 5-7	20	45 dB	.250	1-3 3.2 4-8 3.0	(1-3) 4,000	A
-04	2.3:1 ±3% 3.2:1 ±3%	4-8 5-7	1-3 1-3	20	45 dB	.300	1-3 1.2 4-8 3.0	(5-7) 3,000	A
-05	1:1.41 ±3%	1-2	3-4	20	45 dB	---	1-2 2.2 3-4 2.7	(3-4) 3,000	C
-06	1:1 ±3%	1-5	2-6	20	45 dB	---	1-5 2.5 2-6 2.8	(1-5) 3,000	B
-07	1:1.41 ±3%	1-5	2-6	20	45 dB	---	1-5 2.2 2-6 2.7	(2-6) 3,000	B
-08	1:1.66 ±3%	1-5	2-6	20	45 dB	---	1-5 1.5 2-6 2.4	(2-6) 3,000	B
-09	1:2 ±3%	1-5	2-6	20	45 dB	---	1-5 1.3 2-6 2.6	(2-6) 3,000	B

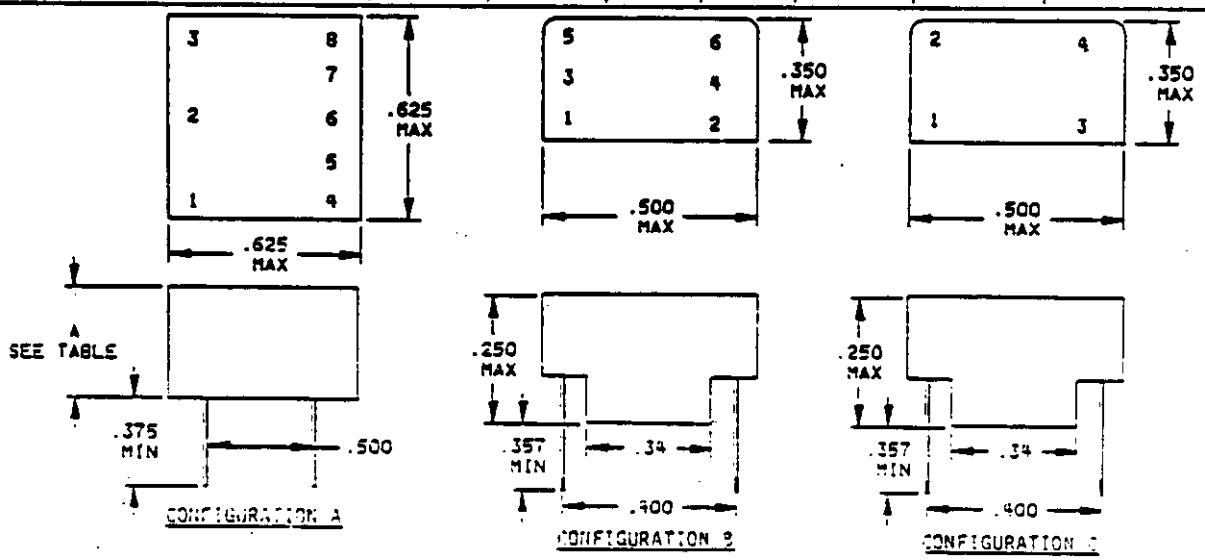

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 200



INDUCTORS

1. Scope. This section covers audio and power inductors for use in electronic equipment to induce inductance into a circuit.

Section		Applicable Specification
201	Inductors, Audio Frequency - - - - - -	MIL-T-27
202	Inductors, Power - - - - - - - - - - -	MIL-T-27


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

INDUCTORS, AUDIO FREQUENCY

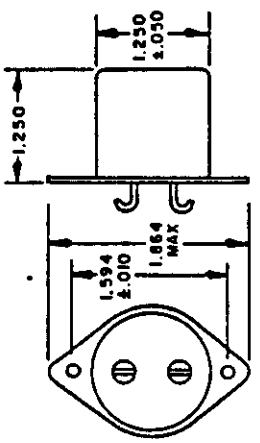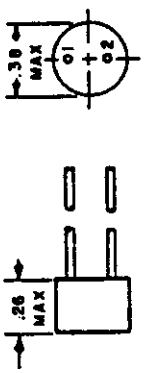
Part number and dash number	Inductance (mH)	DC current (amperes)	Voltage	DCR (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/111-01	10 (1-2)	0.50 (1-2)	1 Vrms @.4 kHz	0.5 (1-2)	4	171°C	
MIL-T-27/112-01	10 (1-2)	.05 (1-2)	1 Vrms .4 kHz	0.5 (1-2)	5	171°C	
MIL-T-27/124-01	5 (1-2)	28 (1-2)	1 Vrms 1 kHz	7 (1-2)	5	130°C	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number	Inductance range			Voltage (V rms)	DC current (mA)	DCR ±20% (ohms)	Grade	Maximum operating temperature	Figure and dimensions
	Min H	Mean H	Max H						
MIL-T-27/145-01	0.002	0.006	0.02	0.5	100	0.5	4	105°C	
MIL-T-27/145-02	0.005	0.015	0.05	0.5	60	1.4	"	"	
MIL-T-27/145-03	0.011	0.040	0.11	0.5	40	3.6	"	"	
MIL-T-27/145-04	0.03	0.10	0.3	1	30	8.6	"	"	
MIL-T-27/145-05	0.07	0.25	0.7	1	20	22	"	"	
MIL-T-27/145-06	0.2	0.6	2	1	15	55	"	"	
MIL-T-27/145-07	0.5	1.5	5	5	10	141	"	"	
MIL-T-27/145-08	1.1	4	11	7	7	360	"	"	
MIL-T-27/145-09	3	10	30	7	5	950	"	"	
MIL-T-27/145-10	7	25	70	10	3.5	2220	"	"	
MIL-T-27/145-11	20	60	200	10	2	5550	"	"	
MIL-T-27/145-12	50	150	500	10	1.6	15.6 K	"	"	

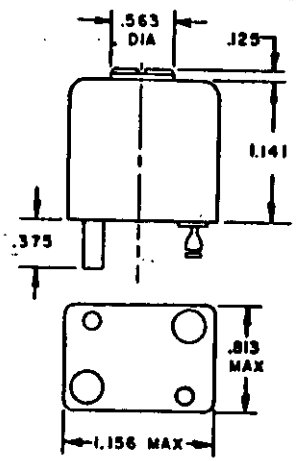


Part number and dash number	Inductance (maximum) (mH) ±2%	DC current (maximum) (mA)	DCR (maximum) at 25°C (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/146-01	1	60	1.4	5	105°C	
MIL-T-27/146-02	5	28	7	"	"	
MIL-T-27/146-03	10	20	11	"	"	
MIL-T-27/146-04	25	13	38	"	"	
MIL-T-27/146-05	50	9	75	"	"	
MIL-T-27/146-06	100	6	132	"	"	

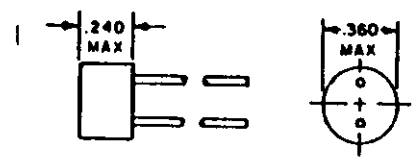



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number	Inductance (H) (1-2)	DC current mA (1-2)	Quality factor (min)	DCR ±20% (ohms) (1-2)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/147-01	0.010	400	180 at 3 kHz	0.30	4	105°C	
MIL-T-27/147-02	0.030	250	180 at 3 kHz	0.90	"	"	
MIL-T-27/147-03	0.070	170	200 at 3 kHz	2.2	"	"	
MIL-T-27/147-04	0.12	120	200 at 3 kHz	3.6	"	"	
MIL-T-27/147-05	0.50	60	200 at 3 kHz	16	"	"	
MIL-T-27/147-06	1.0	40	190 at 3 kHz	28	"	"	
MIL-T-27/147-07	2.0	30	165 at 2 kHz	64	"	"	
MIL-T-27/147-08	3.5	22	135 at 1.5 kHz	101	"	"	
MIL-T-27/147-09	7.5	16	110 at 1 kHz	230	"	"	
MIL-T-27/147-10	12	11	100 at 1 kHz	373	"	"	
MIL-T-27/147-11	18	9.0	85 at 700 Hz	463	"	"	
MIL-T-27/147-12	25	8.0	75 at 700 Hz	680	"	"	
MIL-T-27/147-13	40	6.0	65 at 400 Hz	1075	"	"	
MIL-T-27/147-14	60	4.0	65 at 400 Hz	1670	"	"	

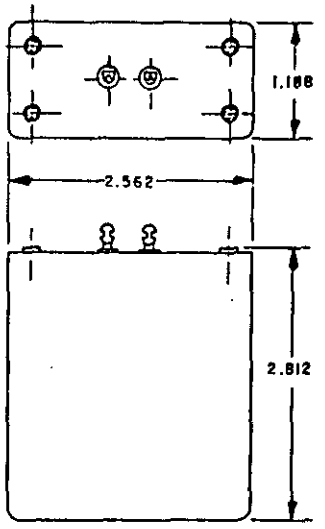



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

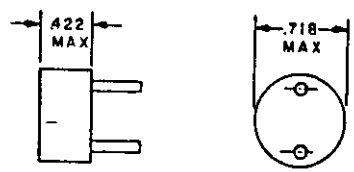Part number and dash number	Inductance ±1% (H) (1-2)	DC current (max) (mA) (1-2)	Quality factor (min)	DCR ±20% at 25°C ohms (1-2)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/161-01	0.05	25	70 at 15 kHz	27	5	105°C	
MIL-T-27/161-02	0.10	18	70 at 15 kHz	51	"	"	
MIL-T-27/161-03	0.25	11	65 at 15 kHz	136	"	"	
MIL-T-27/161-04	0.50	8	65 at 10 kHz	243	"	"	
MIL-T-27/161-05	0.75	7	60 at 10 kHz	355	"	"	
MIL-T-27/161-06	1.0	6	55 at 10 kHz	500	"	"	
MIL-T-27/161-07	1.2	5	55 at 10 kHz	560	"	"	
MIL-T-27/161-08	2.0	4	43 at 5 kHz	870	"	"	
MIL-T-27/161-09	3.0	3.5	40 at 5 kHz	1340	"	"	
MIL-T-27/161-10	5.0	3	33 at 5 kHz	2500	"	"	

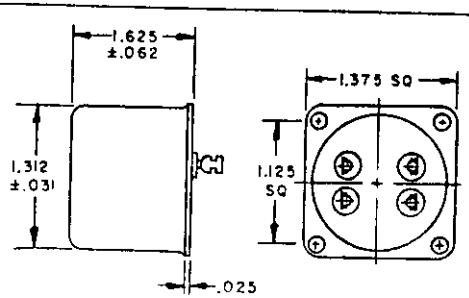Part number and dash number	Inductance ±2% (H) (1-4)	Voltage (V) (1-4)	Quality factor at 1 V (min)	DCR ±20% ohms (1-4)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/162-01	2.0/0.5	1.0/0.5 at 60 Hz	24 at 150 Hz	21	4	130°C	
MIL-T-27/162-02	16/4.0	"	23 at 150 Hz	143	"	"	
MIL-T-27/162-03	40/10	"	23 at 100 Hz	368	"	"	
MIL-T-27/162-04	300/75	"	23.5 at 100 Hz	3700	"	"	
MIL-T-27/162-05	600/150	"	23.5 at 100 Hz	5720	"	"	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

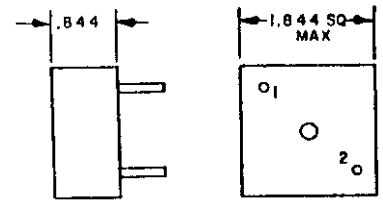
Part number and dash number	Inductance ±1% (H) (1-2)	Current (max) (mA) (1-2)	Voltage	Quality factor at 1 V (min)	DCR (max) (ohms) (1-2)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/163-01	0.1	60	1 at 400 Hz	210 at 3 kHz	4.2	5	105°C	
MIL-T-27/163-02	0.5	25	"	185 at 3 kHz	23	"	"	
MIL-T-27/163-03	1.0	18	"	185 at 3 kHz	43	"	"	
MIL-T-27/163-04	2.0	12	"	140 at 2 kHz	92	"	"	
MIL-T-27/163-05	5.0	8	"	120 at 1.5 kHz	240	"	"	
MIL-T-27/163-06	10.0	6	"	95 at 1 kHz	440	"	"	

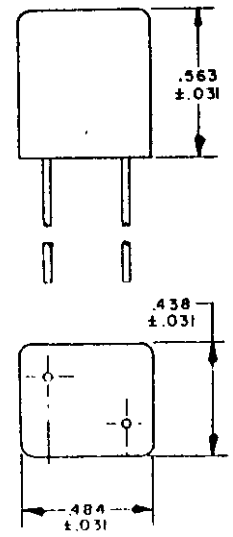
Part number and dash number	Inductance (H)	DC current (mA) (max)	DCR at 25°C ±20% (ohms)	Frequency range (Hz)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/164-01	.15	12	33	2,000	5	105°C	
MIL-T-27/164-02	.25	9	55	2,000	"	"	
MIL-T-27/164-03	.40	7	90	2,000	"	"	
MIL-T-27/164-04	.70	5	135	2,000	"	"	
MIL-T-27/164-05	1.4	3	210	15,000	"	"	
MIL-T-27/164-06	2.5	1	210	800	"	"	
MIL-T-27/164-07	4.0	.7	340	800	"	"	
MIL-T-27/164-08	6.0	.6	530	800	"	"	
MIL-T-27/164-09	10	.5	850	800	"	"	
MIL-T-27/164-10	25	.3	2,300	800	"	"	
MIL-T-27/164-11	60	.2	5,160	800	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number	Inductance (H)		DC current (amperes)	DCR (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/168							
-01	.1		55 mA	14	5	105°C	
-02	.15		45 mA	22	"	"	
-03	.30		28 mA	34	"	"	
-04	.50		23 mA	54	"	"	
-05	1.0		16 mA	130	"	"	
-06	2.0		8 mA	130	"	"	
-07	5.0		5 mA	340	"	"	
-08	7.5		4.5 mA	517	"	"	
-09	20		2.7 mA	1310	"	"	
-10	50		1.4 mA	3180	"	"	
-11	100		1.1 mA	8550	"	"	
	Inductance (H)						
	Series connected	Parallel connected					
MIL-T-27/175-01	1.0	.25	0	5	4	105°C	
MIL-T-27/175-02	10	2.5	"	50	"	"	
MIL-T-27/175-03	20	5	"	82	"	"	
MIL-T-27/175-04	200	50	"	820	"	"	
MIL-T-27/175-05	400	100	"	2100	"	"	
MIL-T-27/175-06	2500	652	"	13K	"	"	

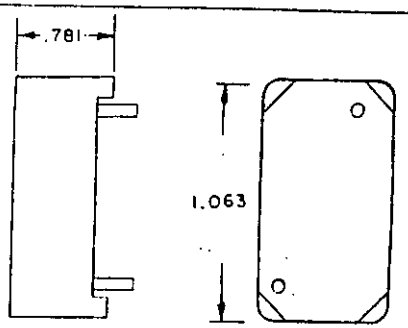






Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:43Z
Check the source to verify that this is the current version before use.



SECTION 201

INDUCTORS, AUDIO FREQUENCY

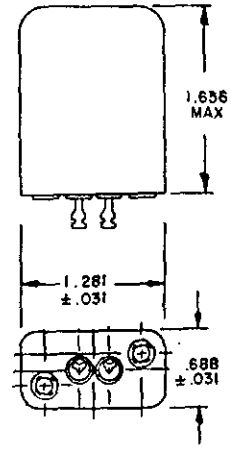Part number and dash number	Inductance (H)	DC current (mA)	DCR (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/205-01	.007	250	.6	4	105°C	
MIL-T-27/205-02	.012	200	1.1	"	"	
MIL-T-27/205-03	.020	150	1.6	"	"	
MIL-T-27/205-04	.030	125	2.5	"	"	
MIL-T-27/205-05	.050	100	3.9	"	"	
MIL-T-27/205-06	.070	80	5.7	"	"	
MIL-T-27/205-07	.120	60	9.1	"	"	
MIL-T-27/205-08	.2	50	16	"	"	
MIL-T-27/205-09	.3	40	25	"	"	
MIL-T-27/205-10	.5	30	39	"	"	
MIL-T-27/205-11	.7	25	58	"	"	
MIL-T-27/205-12	1.0	20	84	"	"	
MIL-T-27/205-13	1.5	17	130	"	"	
MIL-T-27/205-14	2.5	13	215	"	"	
MIL-T-27/205-15	4.0	10	335	"	"	
MIL-T-27/205-16	6.0	9	510	"	"	
MIL-T-27/205-17	10	7	840	"	"	
MIL-T-27/205-18	15	5	1350	"	"	
MIL-T-27/205-19	22	4	1960	"	"	
MIL-T-27/205-20	35	3	3200	"	"	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

INDUCTORS, AUDIO FREQUENCY



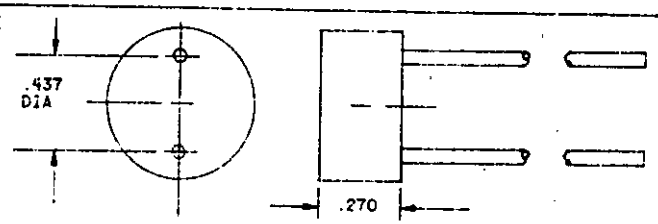
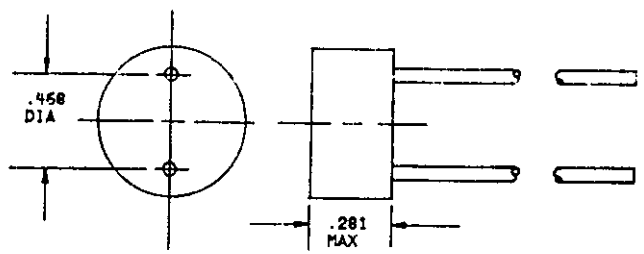
Part number and dash number	Inductance (H)	DC current (mA)	DCR (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/214-08	1.00 mH ±2%	0	2.30	5	130°C	
-11	3.30 mH ±1%	0	5.50	"	"	
-14	10.0 mH ±1%	0	26.0	"	"	
MIL-T-27/240-01	3.0 mH ±2%	50	4.8	5	105°C	
-02	5.0 mH ±2%	40	8.0	"	"	
-03	8.0 mH ±2%	30	13.0	"	"	
-04	12.5 mH ±2%	25	19.0	"	"	
-05	20.0 mH ±2%	20	31.0	"	"	
-06	30.0 mH ±2%	16	47.0	"	"	
-07	60.0 mH ±2%	11	94.0	"	"	
-08	120.0 mH ±2%	8	186.0	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43:29
Check the source to verify that this is the current version before use.

INDUCTORS, AUDIO FREQUENCY

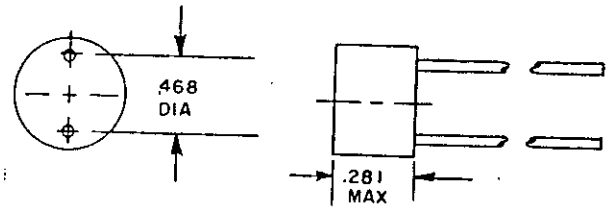Part number and dash number	Inductance (H)	DC current (mA)	DCR (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/241-01	.6 mH ±2%	90	1.9	S	105°C	
-02	1.5 mH ±2%	57	4.9	"	"	
-03	2.5 mH ±2%	44	8.2	"	"	
-04	6.0 mH ±2%	28	19.0	"	"	
-05	10.0 mH ±2%	22	32.0	"	"	
-06	15.0 mH ±2%	18	49.0	"	"	
-07	25.0 mH ±2%	14	82.0	"	"	
-08	4.0 mH ±2%	11	132.0	"	"	
MIL-T-27/285-01	100 mH ±2%	7.0	70.0	S	105°C	See figure for MIL-T-27/241
-02	150 mH ±2%	6.0	110	"	"	
-03	250 mH ±2%	4.5	180	"	"	
-04	350 mH ±2%	3.7	265	"	"	
-05	500 mH ±2%	3.0	360	"	"	
-06	750 mH ±2%	2.5	540	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number	Inductance (μH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/84-01	.04 mH	1.5	1 V rms 20 kHz	.045	5	130°C	
MIL-T-27/85-01	374 min 506 max	1	1 V rms 10 kHz	.070	5	130°C	
MIL-T-27/86-01	50 min	.5	.2 V rms 10 kHz	.25	5	130°C	
MIL-T-27/88-01	72 min	1.0	.1 V rms 10 kHz	.3	5	130°C	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.



SECTION 202

INDUCTORS, POWER



Part number and dash number	Inductance (μH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/89-01	450 ±50 (1-2) 450 ±50 (3-4)	.5(1-2) .5(3-4)	.565 V rms 400 Hz (1-2), (3-4)	.2(1-2) .2(3-4)	5	155°C	
MIL-T-27/98-01	3.9 1.5	0 2.0	1.0 V rms 1.0 kHz	0.41	5	155°C	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 202
INDUCTORS, POWER

Part number and dash number	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/119-01	25 µH min	35	1 V rms 20 kHz	.004	S	130°C	
MIL-T-27/120-01	120 µH	1.5	1.5 V rms 2.4 kHz	.0584	S	130°C	




Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

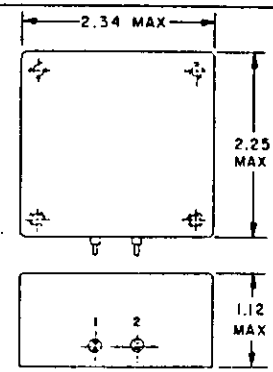Part number and dash number	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/123-01	1	3	1 V rms 20 kHz	.124	5	130°C	
MIL-T-27/135-01	60 µH min	3	1 V rms 10 kHz	.025	5	170°C	




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 202





INDUCTORS, POWER

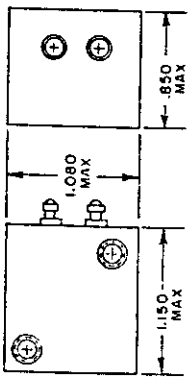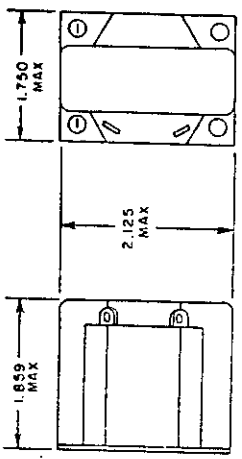Part number and dash number	Inductance (H)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/137-01	67.5 µH min 86.25 µH max	2.7	6.2 V rms 2.4 kHz	.045	5	130°C	
	48.5 µH min	4.05					
MIL-T-27/149-01	1.5 min	45 mA	10 V rms 60 Hz	225	5	130°C	
MIL-T-27/160	1.0 min	200 mA	10 V rms 60 Hz	69	5	130°C	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

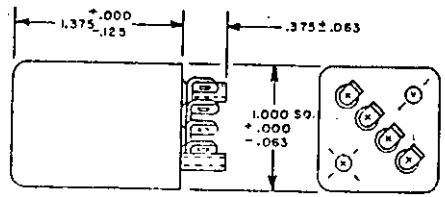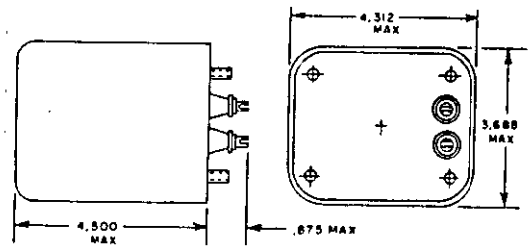
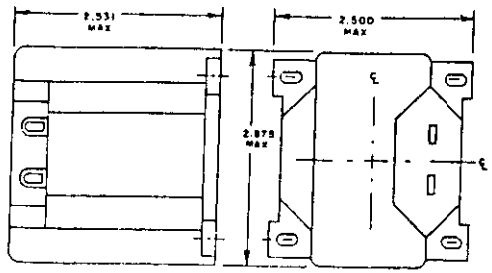
Part number and dash number	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/171	(Connected) (Series) 9 to 45 (parallel) 2.25 to 11.25	(Connected) (Series) .75 to .035 (parallel) 1.5 to .07	(Series) 3 V rms 60 Hz (par-rms allel) 1.5 Vrms 60 Hz	0.52 (1-2) 0.68 (3-4)	4	130°C	
MIL-T-27/174-01	11 H	.2	10 V rms 60 Hz	85	4	130°C	
MIL-T-27/179	1H	.325	10 V rms 60 Hz	44	5	130°C	

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:43Z
Check the source to verify that this is the current version before use.

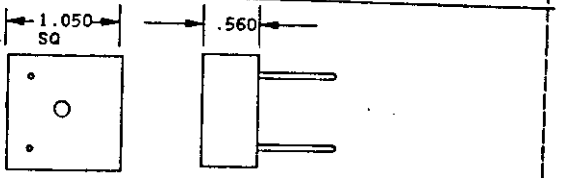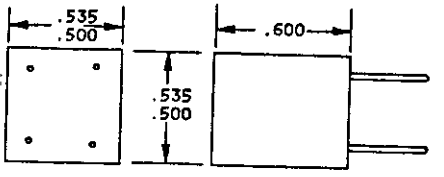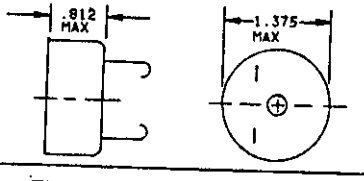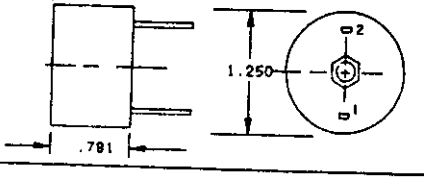
Part number and dash number	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/189-01	1.5	1.5	30 V rms 16 kHz	1.6	5	130°C	
MIL-T-27/190-01	25 min	.75	2.5 V rms 20 kHz	2	5	130°C	
MIL-T-27/191-01	45 µH to 60 µH	4.8	0.5 16 kHz	.030	5	130°C	See MIL-T-27/191
MIL-T-27/229-01	60 µH	6	28 V pK to pK 10 kHz	.025	5	170°C	
MIL-T-27/234-01	1 mH.	1.5	10 V rms 1 kHz	.36	5	130°C	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 202
INDUCTORS, POWER

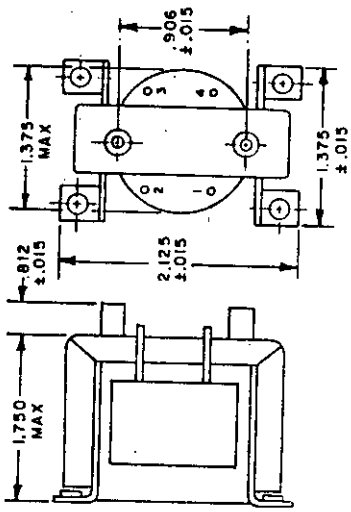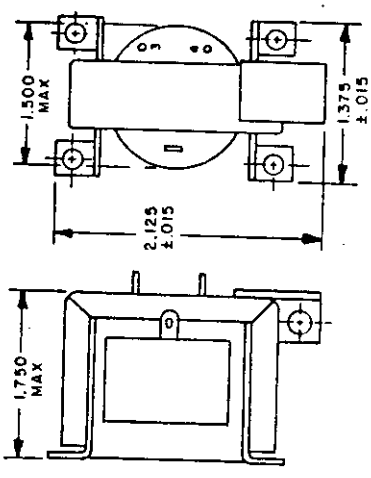
Part number and dash number	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/259-01	2.2 min	2.35	26 V rms 800 Hz	.15	5	170°C	
MIL-T-27/261-01	1.35 mH	3.85	26 V rms 800 Hz	.2	5	170°C	


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

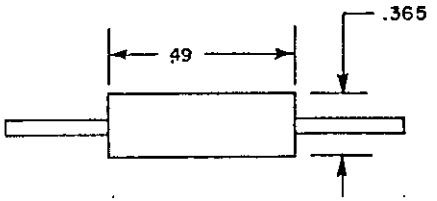Part number and dash number	Inductance (uH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/286-01	120	1.6	1 V rms 20 kHz	.14	5	105°C	
-02	300	1.0	"	.35	"	"	
-03	500	.75	"	.56	"	"	
-04	1200	.50	"	1.40	"	"	
-05	3000	.30	"	3.50	"	"	
-06	5000	.25	"	5.60	"	"	
-07	30	3	"	.035	"	"	
-08	50	2.5	"	.056	"	"	
MIL-T-27/287-01	1250	1.2	1 V rms 10 kHz	.7	5	105°C	See MIL-T-27/287
-02	800	1.5	"	.45	"	"	
-03	500	1.8	"	.3	"	"	
-04	350	2.2	"	.2	"	"	
-05	200/50	3/6	"	.12/.03	"	"	
-06	88/22	4.5/9	"	.052/.013	"	"	
-07	32/8	7.5/15	"	.02/.005	"	"	
MIL-T-27/288-01	3000	1.2	1 V rms 10 kHz	1.2	5	105°C	See MIL-T-27/288
-02	2000	1.5	"	.8	"	"	
-03	1200	1.88	"	.5	"	"	
-04	780	2.4	"	.3	"	"	
-05	520	3	"	.2	"	"	
-06	320	3.75	"	.13	"	"	
-07	220/55	4.5/9	"	.08/.02	"	"	
-08	120/30	5/12	"	.05/.013	"	"	
-09	80/20	7.5/15	"	.032/.008	"	"	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/289-01	10,000 µH	1.1	1 V rms 10 kHz	2.1	5	130°C	
-02	6,400 µH	1.35	"	1.4	"	"	
-03	2,500 µH	2.2	"	.55	"	"	
-04	1,600 µH	2.8	"	.34	"	"	
-05	1,000 µH	3.5	"	.21	"	"	
-06 1/	640 µH / 160 µH	4.5 / 9	"	.13 / .033	"	"	
-07 1/	400 µH / 100 µH	5.4 / 10.8	"	.088 / .022	"	"	
-08 1/	240 µH / 60 µH	6.8 / 13.6	"	.056 / .014	"	"	
MIL-T-27/298-01	25 H	.04	160 V rms 60 Hz	600	5	105°C	



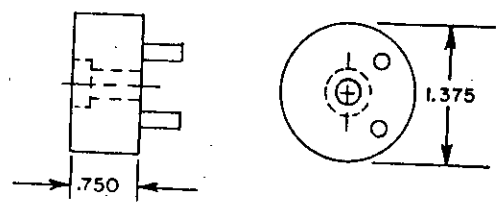


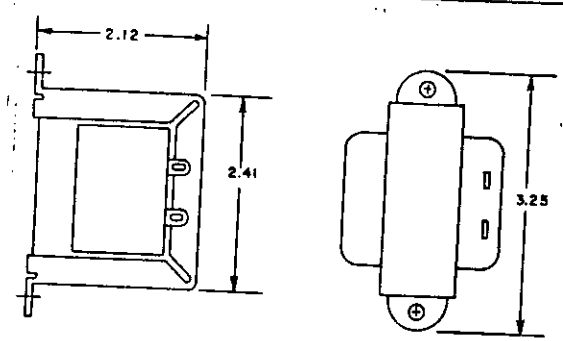

1/ Electrical values written one above the other indicate the values for a series or parallel connections respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.


SECTION 202
INDUCTORS, POWER

Part number and dash number	Inductance (mH)	DC current (amperes)	Voltage	DCR (max) (ohms)	Grade	Maximum operating temperature	Figure and dimensions
MIL-T-27/303-01	.6	2.5	1.0	.2	5	130°C	
MIL-T-27/304-01	.022	2.5	1.0	.02	5	130°C	
MIL-T-27/305-01	.075	8.0	1.0	.025	5	130°C	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number M27/356-	Series inductance (mH)	Series dc current (max) (amps)	Series dc resistance ±25% (ohms)	Parallel inductance (mH)	Parallel dc current (max) (amps)	Parallel dc resistance ±25% (ohms)
01	20	.06	54	5	.12	13.5
02	20	.10	29	5	.20	7.25
03	20	.14	20	5	.28	5.0
04	20	.22	12.4	5	.44	3.1
05	20	.29	10.2	5	.58	2.55
06	15	.07	40.5	3.75	.14	10.125
07	15	.12	22	3.75	.24	5.5
08	15	.16	15	3.75	.32	3.75
09	15	.25	9.3	3.75	.50	2.325
10	15	.33	7.7	3.75	.66	1.925
11	10	.08	27	2.5	.16	6.75
12	10	.14	14.6	2.5	.28	3.65
13	10	.20	10	2.5	.40	2.5
14	10	.31	6.2	2.5	.62	1.55
15	10	.40	5.1	2.5	.80	1.275
16	7.5	.10	20.3	1.88	.20	5.075
17	7.5	.17	11	1.88	.34	2.75
18	7.5	.24	7.5	1.88	.48	1.875
19	7.5	.38	4.7	1.88	.76	1.175
20	7.5	.49	3.8	1.88	.98	.95
21	5.0	.12	13.5	1.25	.24	3.375
22	5.0	.21	7.3	1.25	.42	1.825
23	5.0	.30	5	1.25	.60	1.25
24	5.0	.47	3.1	1.25	.94	.775
25	5.0	.6	2.6	1.25	1.2	.65
26	3.0	.16	8.1	0.75	.32	2.025
27	3.0	.27	4.4	0.75	.54	1.1
28	3.0	.38	3.0	0.75	.76	.75
29	3.0	.6	1.9	0.75	1.2	.475
30	3.0	.78	1.5	3.75	1.56	.375
31	2.0	.19	5.4	0.5	.38	1.35

Figure and dimensions

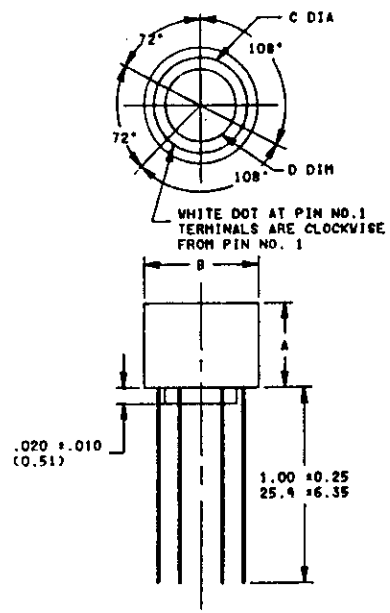


For dimensions A and B
see MIL-T-27/356

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:43Z
Check the source to verify that this is the current version before use.

Part number and dash number M27/156-	Series inductance (mH)	Series dc current (max) (amps)	Series dc resistance ±25% (ohms)	Parallel inductance (mH)	Parallel dc current (max) (amps)	Parallel dc resistance ±25% (ohms)
32	2	.33	2.9	.5	.66	.725
33	2	.47	2	.5	.94	.5
34	2	.74	1.3	.5	1.48	.325
35	2	.95	1	.5	1.9	.25
36	1	.27	2.7	.25	.54	.675
37	1	.47	1.5	.25	.94	.375
38	1	.66	1	.25	1.32	.25
39	1	1	.62	.25	2	.155
40	1	1.3	.5	.25	2.6	.125
41	.750	.31	2	.1875	.62	.5
42	.750	.54	1	.1875	1.08	.25
43	.750	.76	.75	.1875	1.52	.1875
44	.750	1.3	.47	.1875	2.4	.1175
45	.750	1.6	.38	.1875	3.2	.095
46	.500	.38	1.3	.125	.76	.325
47	.500	.66	.66	.125	1.32	.165
48	.500	.93	.5	.125	1.86	.125
49	.500	1.47	.31	.125	2.94	.0775
50	.500	1.9	.25	.125	3.8	.0625
51	.250	.53	.66	.0625	1.06	.165
52	.250	.93	.33	.0625	1.86	.0825
53	.250	1.3	.26	.0626	2.6	.0625
54	.250	2.08	.16	.0625	4.16	.04
55	.250	2.7	.13	.0626	5.4	.0325
56	.100	0.76	.30	.025	1.56	.075
57	.100	1.36	.17	.025	2.7	.043
58	.100	1.95	.11	.025	3.9	.028
59	.100	3.08	.07	.025	6.16	.018
60	.100	3.88	.05	.025	7.76	.015
61	.040	1.18	.14	.01	2.36	.035
62	.040	2.03	.07	.01	4.06	.018
63	.040	2.68	.05	.01	5.36	.015

Figure and dimensions

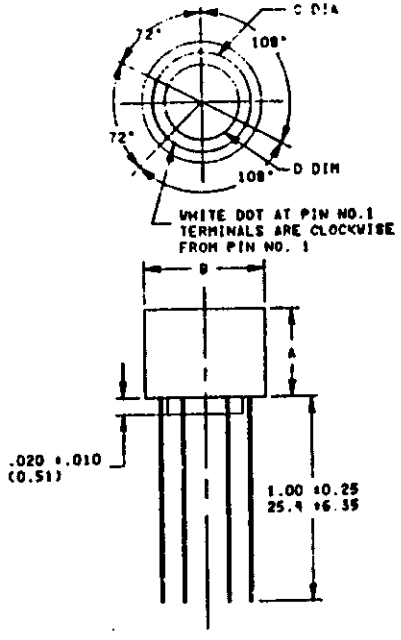

For dimensions A and B see MIL-T-27/356

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 300

COILS, RADIOFREQUENCY

1. Scope. This section covers radiofrequency coils, fixed and variable, for use as simple inductive elements in radiofrequency circuits, as follows:

Section		Applicable specification
301	Coils, Radiofrequency, Variable, Unshielded (Iron Core) - - -	MIL-C-15305
302	Coils, Radiofrequency, Variable, Unshielded (Ferrite Core) -	MIL-C-15305
303	Coils, Radiofrequency, Variable, Shielded (Iron Core) - - - -	MIL-C-15305
304	Coils, Radiofrequency, Variable, Shielded (Ferrite Core)- - -	MIL-C-15305

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

2. Identification.

2.1 Type designation. The type designation is used to describe certain characteristics of the rf coils covered by MIL-C-15305 as shown in figure 300-1.

2.2 Part number. The part number is comprised of the basic military standard number and applicable dash number which specifies the coil.

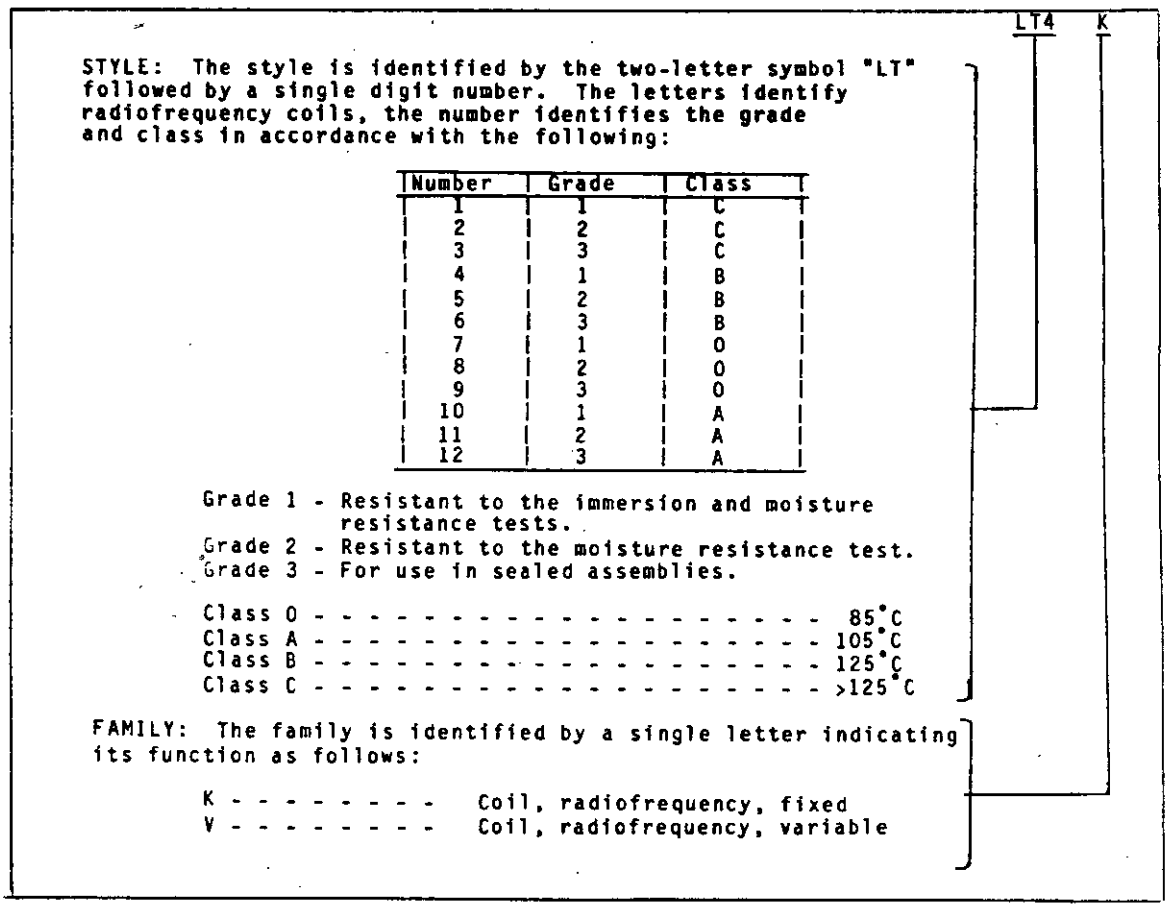



FIGURE 300-1. Type designation example (MIL-C-15305).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 301

COILS, RADIOFREQUENCY, VARIABLE, UNSHIELDED (IRON CORE)

STYLE LT11, GRADE 2, CLASS A

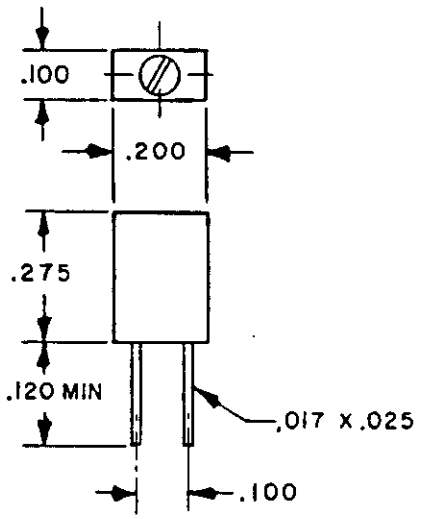

Inches	mm
.017	.43
.025	.64
.100	2.54
.120	3.05
.200	5.08
.275	6.98


MS part number	Type designation	Inductance L max (µH)	Inductance L min (µH)	Test frequency (MHz)	Q min at L max	Rated current max (mA) DC
MS53229-1	LT11V001	.025	.020	200	50	250
MS53229-2	LT11V002	.051	.035	100	40	250
MS53229-3	LT11V003	.076	.055	100	40	250
MS53229-4	LT11V004	.10	.07	25	30	250
MS53229-5	LT11V005	.15	.11	25	30	200
MS53229-6	LT11V006	.22	.16	25	30	180
MS53229-7	LT11V007	.27	.19	25	30	180
MS53229-8	LT11V008	.33	.24	25	30	140
MS53229-9	LT11V009	.47	.34	25	30	100
MS53229-10	LT11V0010	.56	.40	25	30	100
MS53229-11	LT11V0011	.68	.50	25	30	100
MS53229-12	LT11V0012	.82	.59	25	30	100
MS53229-13	LT11V0013	1.0	.50	7.9	25	125
MS53229-14	LT11V0014	1.5	1.0	7.9	25	100
MS53229-15	LT11V0015	2.2	1.2	7.9	25	80
MS53229-16	LT11V0016	2.7	1.95	7.9	25	75
MS53229-17	LT11V0017	3.3	2.2	7.9	25	65
MS53229-18	LT11V0018	4.7	2.5	7.9	25	60
MS53229-19	LT11V0019	5.8	2.9	7.9	25	58
MS53229-20	LT11V0020	6.8	3.4	7.9	25	55
MS53229-21	LT11V0021	8.2	4.6	7.9	25	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 302

COILS, RADIOFREQUENCY, VARIABLE, UNSHIELDED (FERRITE CORE)

STYLE LT11, GRADE 2, CLASS A

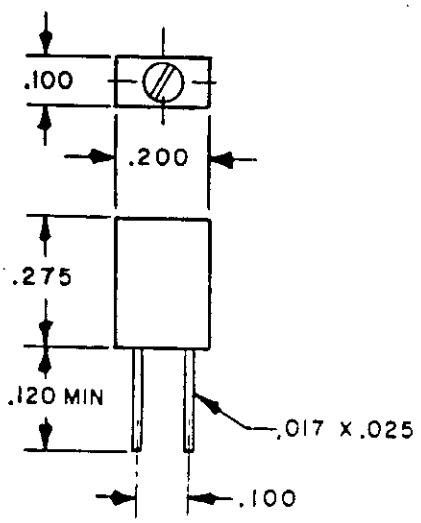

Inches	mm
.017	.43
.025	.64
.100	2.54
.120	3.05
.200	5.08
.275	6.98

MS part number	Type designation	Inductance L max (µH)	Inductance L min (µH)	Test frequency (MHz)	Q min at L max	Rated current max (mA) DC
MS53230-1	LT11V022	10.0	5.5	2.5	25	57
MS53230-2	LT11V023	13.0	6.5	2.5	25	53
MS53230-3	LT11V024	16.0	8.0	2.5	30	50
MS53230-4	LT11V025	20.0	10.0	2.5	30	43
MS53230-5	LT11V026	22.0	11.0	2.5	30	43
MS53230-6	LT11V027	30.0	15.0	2.5	30	40
MS53230-7	LT11V028	36.0	18.0	2.5	30	40
MS53230-8	LT11V029	47.0	24.0	2.5	30	39
MS53230-9	LT11V030	56.0	28.0	2.5	30	35
MS53230-10	LT11V031	68.0	34.0	2.5	30	30
MS53230-11	LT11V032	75.0	38.0	2.5	30	30
MS53230-12	LT11V033	86.0	43.0	2.5	30	28
MS53230-13	LT11V034	100.0	50.0	.79	28	27
MS53230-14	LT11V035	120.0	60.0	.79	25	25
MS53230-15	LT11V036	470.0	240.0	.79	20	16
MS53230-16	LT11V037	680.0	340.0	.79	20	15
MS53230-17	LT11V038	1 mH	.5 mH	.79	20	11


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 303

COILS, RADIOFREQUENCY, VARIABLE, UNSHIELDED (IRON CORE)

STYLE LT10V, GRADE 1, CLASS A

Inches	mm
.002	0.05
.010	0.25
.020	0.51
.030	0.76
.062	1.57
.200	5.08
.300	7.62
.375	9.53
.400	10.16

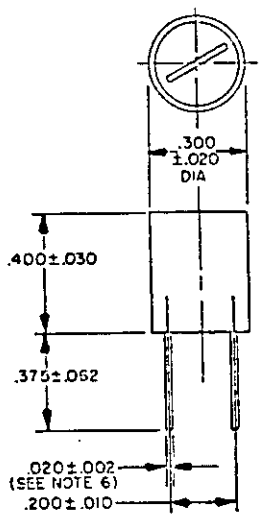

MS part number MS21381-	Type designation	Inductance L max (µH)	Inductance L min (µH)	Test frequency (MHz)	Q min at L nominal	Rated current max (mA) DC
-1	LT10V	.095	.105	25.0	45	1510
-74	"	.105	.116	25.0	45	1480
-2	"	.114	.126	25.0	45	1450
-75	"	.124	.137	25.0	45	1420
-3	"	.143	.158	25.0	45	1400
-76	"	.152	.168	25.0	45	1380
-4	"	.171	.189	25.0	45	1370
-77	"	.190	.210	25.0	45	1350
-5	"	.209	.231	25.0	45	1340
-78	"	.228	.252	25.0	45	1320
-6	"	.257	.284	25.0	51	1300
-79	"	.285	.315	25.0	51	1280
-7	"	.314	.347	25.0	51	1260
-80	"	.342	.378	25.0	51	1250
-8	"	.371	.410	25.0	51	1240
-81	"	.409	.452	25.0	51	1220
-9	"	.447	.494	25.0	51	1200
-82	"	.485	.536	25.0	51	1180
-10	"	.532	.588	25.0	51	1160
-83	"	.589	.651	25.0	51	1130
-11	"	.646	.714	25.0	51	1100
-84	"	.713	.788	25.0	51	1070
-12	"	.779	.861	25.0	55	1040
-85	"	.865	.956	25.0	55	1010
-13	"	.950	1.050	25.0	55	986
-14	"	1.08	1.32	7.9	58	968
-15	"	1.35	1.65	7.9	64	893
-16	"	1.62	1.98	7.9	74	853
-17	"	1.98	2.42	7.9	71	817
-18	"	2.43	2.97	7.9	71	800
-19	"	2.97	3.63	7.9	58	696
-20	"	3.51	4.29	7.9	58	659
-21	"	4.23	5.17	7.9	61	571
-22	"	5.04	6.16	7.9	61	550
-23	"	6.12	7.46	7.9	55	493
-24	"	7.38	9.02	7.9	61	417
-25	"	9.00	11.0	7.9	58	359
-26	"	10.8	13.2	2.5	77	316
-26	"	13.5	16.5	2.5	77	301
-28	"	16.2	19.8	2.5	74	292
-29	"	19.8	24.2	2.5	80	267
-30	"	24.3	29.7	2.5	74	243
-31	"	29.7	36.3	2.5	77	231
-32	"	35.1	42.9	2.5	77	223
-33	"	42.3	51.7	2.5	71	203
-34	"	50.4	61.6	2.5	74	191
-35	"	61.2	74.8	2.5	67	185
-36	"	73.8	90.2	2.5	67	174


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 304

COILS, RADIOFREQUENCY, VARIABLE, SHIELDED (FERRITE CORE)

STYLE LT10, GRADE 1, CLASS A

Inches	mm
.002	0.05
.010	0.25
.020	0.51
.030	0.76
.062	1.57
.200	5.08
.300	7.62
.375	9.53
.400	10.16

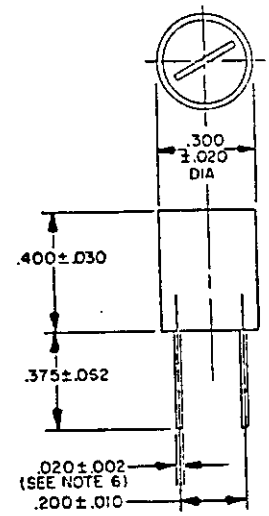

MS part number MS21402-	Type designation	Inductance L max µH	Inductance L min µH	Test frequency (MHz)	Q min at L nominal	Rated current max (mA) DC
-1	LT10V	110	90	2.5	61	180
-2	"	132	108	.790	61	171
-3	"	165	135	.790	58	167
-4	"	198	162	.790	61	156
-5	"	242	198	.790	61	145
-6	"	297	243	.790	64	141
-7	"	363	297	.790	64	121
-8	"	429	351	.790	64	113
-9	"	517	423	.790	64	109
-10	"	616	504	.790	61	105
-11	"	748	612	.790	64	97
-12	"	902	738	.790	58	94
-13	"	1,100	900	.790	64	76
-14	"	1,320	1,080	.250	61	72
-15	"	1,650	1,350	.250	58	65
-16	"	1,980	1,620	.250	64	62
-17	"	2,420	1,980	.250	64	58
-18	"	2,970	2,430	.250	61	56
-19	"	3,630	2,970	.250	58	41
-20	"	4,290	3,510	.250	55	38
-21	"	5,170	4,230	.250	55	36
-22	"	6,160	5,040	.250	51	33
-23	"	7,480	6,120	.250	48	32
-24	"	9,020	7,380	.250	51	31
-25	"	11,000	9,000	.250	45	26
-26	"	13,200	10,800	.079	45	33
-27	"	16,500	13,500	.079	45	29
-28	"	19,800	16,200	.079	45	27
-29	"	24,200	19,800	.079	45	26
-30	"	29,700	24,300	.079	45	20
-31	"	36,300	29,700	.079	45	19
-32	"	42,900	35,100	.079	45	18
-33	"	51,700	42,300	.079	45	17
-34	"	61,600	50,400	.079	45	16
-35	"	74.800	61,200	.079	39	15
-36	"	90,200	73,800	.079	39	14
-37	"	110,000	90,000	.079	39	13

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 400

COILS, FIXED, RADIOFREQUENCY, ESTABLISHED RELIABILITY

1. Scope. This section covers radiofrequency, molded coils which have a specified reliability for use in equipment where reliability, long life, and continuity of operation are necessary, as follows:

Section		Applicable specification
401	Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Phenolic Core-Iron Sleeve)- - - - - -	MIL-C-39010
402	Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Iron Core-Iron Sleeve)- - - - - - - -	MIL-C-39010
403	Coils, Fixed, Radiofrequency, Molded, Micro-Miniature, Magnetically Shielded, Established Reliability (Ferrite Core-Ferrite Sleeve) - - - -	MIL-C-39010
404	Coils, Fixed, Radiofrequency, Molded, Established Reliability (Phenolic Core) - - - - -	MIL-C-39010
405	Coils, Fixed, Radiofrequency, Molded, Established Reliability (Powdered Iron Core)- - -	MIL-C-39010
406	Coils, Fixed, Radiofrequency, Molded, Established Reliability (Ferrite Core)- - - - - -	MIL-C-39010

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

2. Identification.

2.1 Part number. The part number is comprised of the "M" number plus the applicable modifiers describing certain characteristics of the coils covered by MIL-C-39010 as shown in figure 400-1.

M39010/01 A 1R2 J *

MILITARY DESIGNATOR AND DOCUMENT SHEET NUMBER: The "M" is the military designator and the "39010/01" is the document sheet number.

CLASS: The classes of coils denoting the maximum operating temperature are identified by a single letter in accordance with the following:

Class A	105°C
Class B	125°C
Class C	150°C

INDUCTANCE: Inductance values less than 10 µH are identified with two numbers and the letter designating the decimal point.

Example: 1.2 H = 1R2

Inductance values above 10 µH are identified by a 3-digit number. The first two digits represent significant figures, and the last digit specifies the number of zeros to follow.

INDUCTANCE TOLERANCE: The inductance tolerance is identified by a single letter in accordance with the following:

J	±5%
K	±10%
L	±20%

FAILURE-RATE-LEVEL DESIGNATION: The asterisk indicates the dash number will include an additional letter symbol to indicate failure rate level and shall be one of the following:

M	1.0
P	0.1
R	0.01
S	0.001


FIGURE 400-1. Part number example (MIL-C-39010).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 401

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE, MAGNETICALLY SHIELDED, ESTABLISHED RELIABILITY (PHENOLIC CORE-IRON SLEEVE)

(APPLICABLE SPECIFICATION: MIL-C-39010/1)

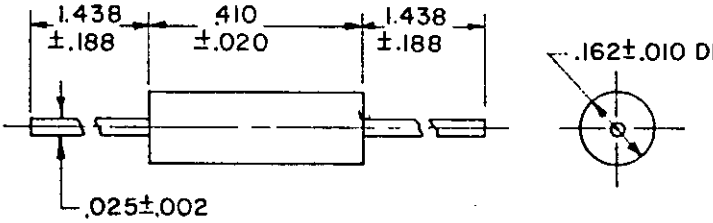

Inches	mm
.002	0.05
.010	0.25
.020	0.51
.025	0.64
.162	4.11
.188	4.78
.410	10.41
1.438	36.53


Part number M39010/01	Inductance µH	Inductance tolerance ± percent	Q min	Test frequency (MHz)	Rated dc current (mA)
AR10**	.10	5,10	50	25	1790
AR11**	.11	5	50	25	1530
AR12**	.12	5,10	50	25	1530
AR13**	.13	5	50	25	1470
AR15**	.15	5,10	50	25	1470
AR16**	.16	5	50	25	1300
AR18**	.18	5,10	50	25	1300
AR20**	.20	5	49	25	1100
AR22**	.22	5,10	49	25	1100
AR24**	.24	5	47	25	853
AR27**	.27	5,10	47	25	853
AR30**	.30	5	46	25	780
AR33**	.33	5,10	46	25	780
AR36**	.36	5	44	25	670
AR39**	.39	5,10	44	25	670
AR43**	.43	5	44	25	565
AR47**	.47	5,10	44	25	565
AR51**	.51	5	43	25	490
AR56**	.56	5,10	43	25	490
AR62**	.62	5	42	25	420
AR68**	.68	5,10	42	25	420
AR75**	.75	5	40	25	370
AR82**	.82	5,10	40	25	370

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 402

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE, MAGNETICALLY SHIELDED, ESTABLISHED RELIABILITY (IRON CORE-IRON SLEEVE)

(APPLICABLE SPECIFICATION: MIL-C-39010/2)

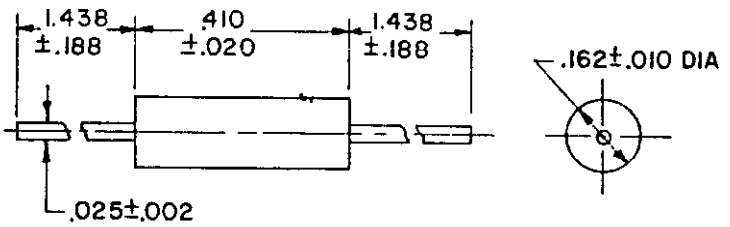

Inches	mm
.002	0.05
.010	0.25
.020	0.51
.025	0.64
.162	4.11
.188	4.78
.410	10.41
1.438	36.53

Part number M39010/02	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
AR91**	.91	5	44	1070
A1R0**	1.00	5,10	44	1070
A1R1**	1.10	5	44	895
A1R2**	1.20	5,10	44	895
A1R3**	1.30	5	44	815
A1R5**	1.50	5,10	44	815
A1R6**	1.60	5	44	755
A1R8**	1.80	5,10	44	755
A2R0**	2.00	5	44	650
A2R2**	2.20	5,10	44	650
A2R4**	2.40	5	44	535
A2R7**	2.70	5,10	44	535
A3R0**	3.00	5	44	480
A3R3**	3.30	5,10	44	480
A3R6**	3.60	5	44	450
A3R9**	3.90	5,10	44	450
A4R3**	4.30	5	44	380
A4R7**	4.70	5,10	44	380
A5R1**	5.10	5	44	335
A5R6**	5.60	5,10	44	335
A6R2**	6.20	5	44	280

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 402

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE, MAGNETICALLY SHIELDED, ESTABLISHED RELIABILITY (IRON CORE-IRON SLEEVE)

(APPLICABLE SPECIFICATION: MIL-C-39010/2)


Part number M39010/02	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
A6R8**	6.80	5,10	50	280
A7R5**	7.50	5	50	245
A8R2**	8.20	5,10	50	245
A9R1**	9.10	5	50	220
A100**	10.00	5,10	50	220
A110**	11.0	5	50	200
A120**	12.0	5,10	55	200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 403

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE,
MAGNETICALLY SHIELDED, ESTABLISHED RELIABILITY (FERRITE CORE-FERRITE SLEEVE)

(APPLICABLE SPECIFICATION: MIL-C-39010/3)

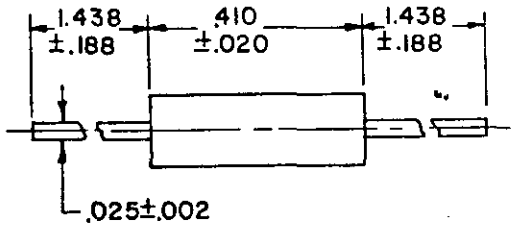

Inches	mm
.002	0.05
.010	0.25
.020	0.51
.025	0.64
.162	4.11
.188	4.78
.410	10.41
1.438	36.53

Part number M39010/03	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)	Incremental current
A150**	15	5,10	45	315.0	250
A160**	16	5	45	300.0	235
A180**	18	5,10	45	300.0	235
A200**	20	5	45	290.0	220
A220**	22	5,10	45	290.0	220
A240**	24	5	45	260.0	200
A270**	27	5,10	45	260.0	200
A300**	30	5	45	240.0	190
A330**	33	5,10	45	240.0	190
A360**	36	5	45	205.0	180
A390**	39	5,10	50	205.0	180
A430**	43	5	50	195.0	175
A470**	47	5,10	50	195.0	175
A510**	51	5	50	190.0	160
A560**	56	5,10	50	190.0	160
A620**	62	5	50	170.0	150
A680**	68	5,10	50	170.0	150
A750**	75	5	50	180.0	140
A820**	82	5,10	50	180.0	140
A910**	91	5	50	160.0	120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 403

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE,
MAGNETICALLY SHIELDED, ESTABLISHED RELIABILITY (FERRITE CORE-FERRITE SLEEVE)

(APPLICABLE SPECIFICATION: MIL-C-39010/3)

Part number M39010/03	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)	Incremental current
A101**	100	5,10	50	160.0	120
A111**	110	5	50	150.0	95
A121**	120	5,10	55	150.0	95
A131**	130	5	55	140.0	90
A151**	150	5,10	55	140.0	90
A161**	160	5	55	135.0	85
A181**	180	5,10	55	135.0	85
A201**	200	5	55	125.0	80
A221**	220	5,10	55	125.0	80
A241**	240	5	55	115.0	70
A271**	270	5,10	55	115.0	70
A301**	300	5	55	110.0	65
A331**	330	5,10	55	110.0	65
A361**	360	5	55	105.0	60
A391**	390	5,10	60	105.0	60
A431**	430	5	60	92.0	58
A471**	470	5,10	60	92.0	58
A511**	510	5	60	90.0	55
A561**	560	5,10	60	90.0	55
A621**	620	5	60	80.0	50
A681**	680	5,10	60	80.0	50
A751**	750	5	60	80.0	45
A821**	820	5,10	60	80.0	45
A911**	910	5	60	70.0	40
A102**	1,000	5,10	60	70.0	40

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 403

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE, MAGNETICALLY SHIELDED, ESTABLISHED RELIABILITY (FERRITE CORE-FERRITE SLEEVE)

(APPLICABLE SPECIFICATION: MIL-C-39010/3)

Part number M39010/03	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)	Incremental current
A112**	1,100	5	45	60.0	35
A122**	1,200	5,10	45	60.0	35
A132**	1,300	5	45	55.0	33
A152**	1,500	5,10	45	55.0	33
A162**	1,600	5	45	50.0	30
A182**	1,800	5,10	45	50.0	30
A202**	2,000	5	45	50.0	27
A222**	2,200	5,10	45	50.0	27
A242**	2,400	5	45	40.0	25
A272**	2,700	5,10	45	40.0	25
A302**	3,000	5	45	40.0	22
A332**	3,300	5,10	45	40.0	22
A362**	3,600	5	45	35.0	20
A392**	3,900	5,10	45	35.0	20
A432**	4,300	5	45	31.0	19
A472**	4,700	5,10	45	31.0	19
A512**	5,100	5	44	28.0	17
A562**	5,600	5,10	44	28.0	17
A622**	6,200	5	40	27.0	16
A682**	6,800	5,10	40	27.0	16
A752**	7,500	5	40	26.0	15
A822**	8,200	5,10	40	26.0	15
A912**	9,100	5	40	24.0	14
A103**	10,000	5,10	40	24.0	14
A113**	11,000	5	30	23.0	13

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 403

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE, MAGNETICALLY SHIELDED, ESTABLISHED RELIABILITY (FERRITE CORE-FERRITE SLEEVE)

(APPLICABLE SPECIFICATION: MIL-C-39010/3)


Part number M39010/03	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)	Incremental current
A123**	12,000	5,10	30	23.0	13
A133**	13,000	5	30	22.0	12
A153**	15,000	5,10	30	22.0	12
A163**	16,000	5	30	21.0	10
A183**	18,000	5,10	30	21.0	10
A203**	20,000	5	27	17.0	9
A223**	22,000	5,10	27	17.0	9
A243**	24,000	5	27	16.0	8
A273**	27,000	5,10	27	16.0	8
A303**	30,000	5	27	15.0	7.5
A333**	33,000	5,10	27	15.0	7.5
A363**	36,000	5	27	15.0	6.0
A393**	39,000	5,10	27	15.0	6.0
A433**	43,000	5	23	13.0	5.5
A473**	47,000	5,10	23	13.0	5.5
A513**	51,000	5	23	13.0	5.0
A563**	56,000	5,10	23	13.0	5.0
A623**	62,000	5	23	12.0	4.0
A683**	68,000	5,10	23	12.0	4.0
A753**	75,000	5	21	11.0	3.5
A823**	82,000	5,10	21	11.0	3.5
A913**	91,000	5	18	11.0	3.0
A104**	100,000	5,10	18	11.0	3.0

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 404

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (PHENOLIC CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/4)

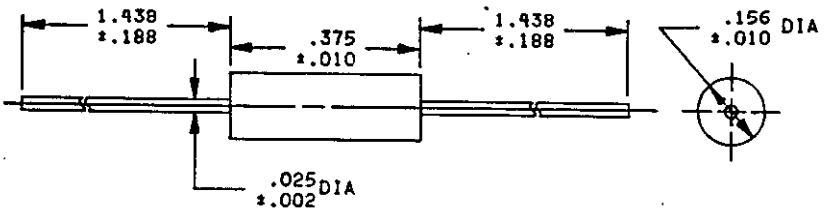

Inches	mm
.002	0.05
.010	0.25
.025	0.64
.188	4.78
.375	9.53
1.438	36.53

Part number M39010/04	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
BR15**	.15	5,10,20	55	2,900
BR16**	.16	5	50	2,700
BR18**	.18	5,10	50	2,700
BR20**	.20	5	50	2,700
BR22**	.22	5,10,20	50	2,700
BR24**	.24	5	50	2,000
BR27**	.27	5,10	50	2,000
BR30**	.30	5	50	2,000
BR33**	.33	5,10,20	50	2,000
BR36**	.36	5	50	1,700
BR39**	.39	5,10	50	1,700
BR43**	.43	5	50	1,700
BR47**	.47	5,10,20	50	1,700
BR51**	.51	5	50	1,450
BR56**	.56	5,10	50	1,450
BR62**	.62	5	45	1,300
BR68**	.68	5,10	45	1,300
BR75**	.75	5	40	1,100
BR82**	.82	5,10	40	1,100
BR91**	.91	5	40	930
B1R0**	1.00	5,10	40	930

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 404

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (PHENOLIC CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/4)


Part number M39010/04	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
B1R1**	1.10	5	30	785
B1R2**	1.20	5,10	30	785
B1R3**	1.30	5	30	720
B1R5**	1.50	5,10	30	720
B1R6**	1.60	5	30	580
B1R8**	1.80	5,10	30	580
B2R0**	2.00	5	30	505
B2R2**	2.20	5,10	30	505
B2R4**	2.40	5	30	460
B2R7**	2.70	5,10	30	460

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 404

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY
(PHENOLIC CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/6)

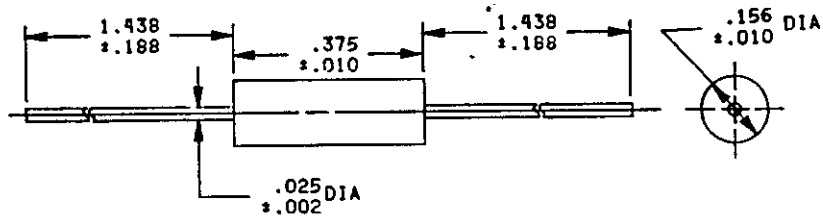

Inches	mm
.002	0.05
.010	0.25
.025	0.64
.188	4.78
.375	9.53
1.438	36.53

Part number M39010/06	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
BR15**	.15	5,10,20	50	2,450
BR16**	.16	5	50	1,810
BR18**	.18	5,10	50	1,810
BR20**	.20	5	50	1,810
BR22**	.22	5,10,20	50	1,810
BR24**	.24	5	45	1,400
BR27**	.27	5,10	45	1,400
BR30**	.30	5	45	1,400
BR33**	.33	5,10,20	45	1,400
BR36**	.36	5	45	1,225
BR39**	.39	5,10	45	1,225
BR43**	.43	5	45	1,225
BR47**	.47	5,10,20	45	1,225
BR51**	.51	5	45	1,150
BR56**	.56	5,10	50	1,150
BR62**	.62	5	50	1,100
BR68**	.68	5,10	50	1,100
BR75**	.75	5	50	900
BR82**	.82	5,10	50	900
BR91**	.91	5	50	785

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 404

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY
(PHENOLIC CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/6)


Part number M39010/06	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
B1R0**	1.00	5,10	50	785
B1R1**	1.10	5	33	650
B1R2**	1.20	5,10	33	650
B1R3**	1.30	5	33	600
B1R5**	1.50	5,10	33	600
B1R6**	1.60	5	33	525
B1R8**	1.80	5,10	33	525
B2R0**	2.00	5	33	435
B2R2**	2.20	5,10	33	435
B2R4**	2.40	5	33	385
B2R7**	2.70	5,10	33	385
B3R0**	3.00	5	33	300
B3R3**	3.30	5,10	33	300
B3R6**	3.60	5	33	280
B3R9**	3.90	5,10	33	280
B4R3**	4.30	5	33	260
B4R7**	4.70	5,10	33	260

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 404

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (PHENOLIC CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/8)

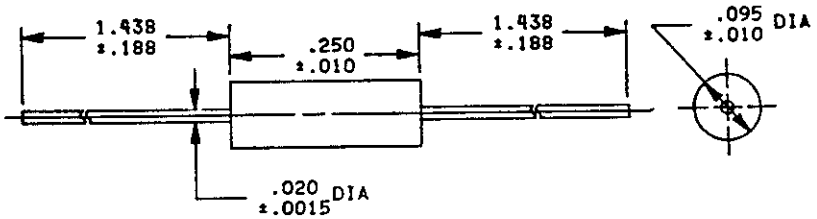

Inches	mm
.0015	0.04
.010	0.25
.020	0.51
.095	2.41
.188	4.78
.250	6.35
1.438	36.53

Part number M39010/08	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
BR10**	.10	5,10	40	1350
BR11**	.11	5	40	1270
BR12**	.12	5,10	40	1270
BR13**	.13	5	38	1200
BR15**	.15	5,10	38	1200
BR16**	.16	5	35	1105
BR18**	.18	5,10	35	1105
BR20**	.20	5	33	1025
BR22**	.22	5,10	33	1025
BR24**	.24	5	33	960
BR27**	.27	5,10	33	960
BR30**	.30	5	30	815
BR33**	.33	5,10	30	815
BR36**	.36	5	30	700
BR39**	.39	5,10	30	700
BR43**	.43	5	30	650
BR47**	.47	5,10	30	650
BR51**	.51	5	30	545
BR56**	.56	5,10	30	545
BR62**	.62	5	28	495
BR68**	.68	5,10	28	495

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 404

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (PHENOLIC CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/8)


Part number M39010/08	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
BR75**	.75	5	28	415
BR82**	.82	5,10	28	415
BR91**	.91	5	25	385
B1R0**	1.00	5,10	25	385

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the currentversion before use.

SECTION 405

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (POWER IRON CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/5)

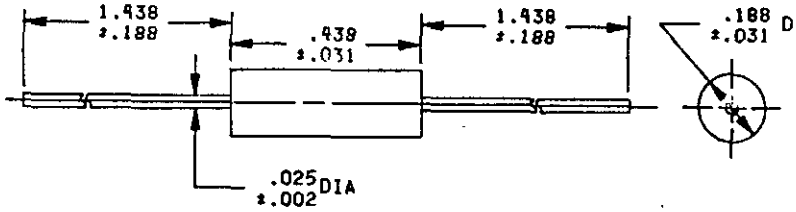

Inches	mm
.002	0.05
.025	0.64
.031	0.79
.188	4.78
.438	11.13
1.438	36.53


Part number M39010/05	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
A3R0**	3.00	5	30	945
A3R3**	3.30	5,10	30	945
A3R6**	3.60	5	30	870
A3R9**	3.90	5,10	30	870
A4R3**	4.30	5	30	745
A4R7**	4.70	5,10	30	745
A5R1**	5.10	5	30	645
A5R6**	5.60	5,10	30	645
A6R2**	6.20	5	30	560
A6R8**	6.80	5,10	30	560
A7R5**	7.50	5	30	520
A8R2**	8.20	5,10	30	520
A9R1**	9.10	5	30	440
A100**	10.0	5,10	30	440
A110**	11.0	5	30	335
A120**	12.0	5,10	50	335
A130**	13.0	5	50	310
A150**	15.0	5,10	55	310
A160**	16.0	5	55	245
A180**	18.0	5,10	60	245
A200**	20.0	5	60	230
A220**	22.0	5,10	60	230
A240**	24.0	5	60	205
A270**	27.0	5,10	65	205

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 405

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY
(POWER IRON CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/7)

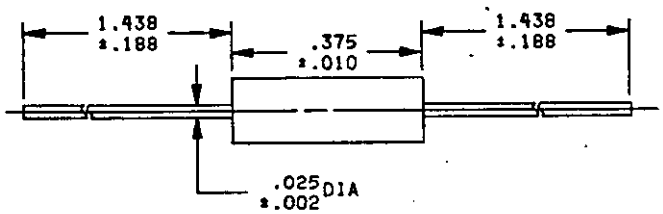

Inches	mm
.002	0.05
.010	0.25
.025	0.64
.156	3.96
.188	4.78
.375	9.53
1.438	36.53


Part number M39010/07	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
A5R1**	5.1	5	45	495
A5R6**	5.6	5,10	45	495
A6R2**	6.2	5	45	395
A6R8**	6.8	5,10	50	395
A7R5**	7.5	5	50	360
A8R2**	8.2	5,10	50	360
A9R1**	9.1	5	50	290
A100**	10.0	5,10	55	290
A110**	11.0	5	55	265
A120**	12.0	5,10	65	265
A130**	13.0	5	65	240
A150**	15.0	5,10	65	240
A160**	16.0	5	65	185
A180**	18.0	5,10	75	185
A200**	20.0	5	75	175
A220**	22.0	5,10	75	175
A240**	24.0	5	60	170
A270**	27.0	5,10	60	170
A300**	30.0	5	60	165
A330**	33.0	5,10	65	165

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 405

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (POWER IRON CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/9)

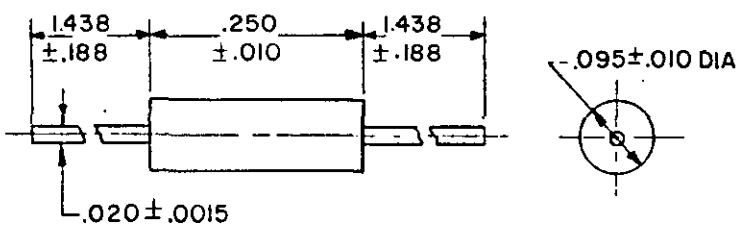

Inches	mm
.0015	0.04
.010	0.25
.020	0.51
.095	2.41
.188	4.78
.250	6.35
1.438	36.53

Part number M39010/09	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
A1R1**	1.1	5	25	590
A1R2**	1.2	5,10	25	590
A1R3**	1.3	5	25	535
A1R5**	1.5	5,10	28	535
A1R6**	1.6	5	28	455
A1R8**	1.8	5,10	30	455
A2R0**	2.0	5	30	395
A2R2**	2.2	5,10	30	395
A2R4**	2.4	5	30	335
A2R7**	2.7	5,10	37	335
A3R0**	3.0	5	37	270
A3R3**	3.3	5,10	45	270
A3R6**	3.6	5	45	250
A3R9**	3.9	5,10	45	250
A4R3**	4.3	5	45	230
A4R7**	4.7	5,10	45	230
A5R1**	5.1	5	45	185
A5R6**	5.6	5,10	50	185
A6R2**	6.2	5	50	175
A6R8**	6.8	5,10	50	175

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 405

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (POWER IRON CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/9)


Part number M39010/09	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
A7R5**	7.5	5	50	155
A8R2**	8.2	5,10	55	155
A9R1**	9.1	5	55	130
A100**	10.0	5,10	55	130
A110**	11.0	5	45	130
A120**	12.0	5,10	45	155
A130**	13.0	5	40	150
A150**	15.0	5,10	40	150
A160**	16.0	5	40	145
A180**	18.0	5,10	50	145
A200**	20.0	5	50	140
A220**	22.0	5,10	50	140
A240**	24.0	5	50	135
A270**	27.0	5,10	50	135

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 406

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (FERRITE CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/10)

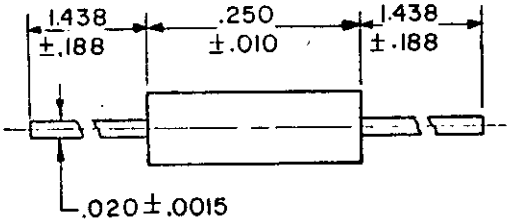

Inches	mm
.0015	0.04
.010	0.25
.020	0.51
.095	2.41
.100	4.78
.250	6.35
1.438	36.53

Part number M39010/10	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
A300**	30.0	5	45	130
A330**	33.0	5,10	45	130
A360**	36.0	5	45	125
A390**	39.0	5,10	45	125
A430**	43.0	5	45	110
A470**	47.0	5,10	45	110
A510**	51.0	5	45	100
A560**	56.0	5,10	45	100
A620**	62.0	5	45	92
A680**	68.0	5,10	50	92
A750**	75.0	5	50	88
A820**	82.0	5,10	50	88
A910**	91.0	5	50	84
A101**	100.0	5,10	50	84
A111**	110.0	5	30	66
A121**	120.0	5,10	30	66
A131**	130.0	5	30	61
A151**	150.0	5,10	30	61
A161**	160.0	5	30	57
A181**	180.0	5,10	30	57
A201**	200.0	5	30	52
A221**	220.0	5,10	30	52
A241**	240.0	5	30	47
A271**	270.0	5,10	30	47

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 406

COILS, FIXED, RADIOFREQUENCY, MOLDED, ESTABLISHED RELIABILITY (FERRITE CORE)

(APPLICABLE SPECIFICATION: MIL-C-39010/10)

Part number M39010/10	Inductance µH	Inductance tolerance ± percent	Q min	Rated dc current (mA)
A301**	300.0	5	30	45
A331**	330.0	5,10	30	45
A361**	360.0	5	30	40
A391**	390.0	5,10	30	40
A431**	430.0	5	30	36
A471**	470.0	5,10	30	36
A511**	510.0	5	30	35
A561**	560.0	5,10	30	35
A621**	620.0	5	30	30
A681**	680.0	5,10	30	30
A751**	750.0	5	30	29
A821**	820.0	5,10	30	29
A911**	910.0	5	30	28
A102**	1000.0	5,10	30	28

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the currenversion before use.

SECTION 500

COILS, CHIP, RADIO FREQUENCY, FIXED OR VARIABLE

1. Scope. This section covers fixed or variable chip radiofrequency coils primarily intended for incorporation into hybrid microelectronic circuits.

Section		Applicable specification
501	Coils, Chip, Radiofrequency, Fixed	MIL-C-83446
502	Coils, Chip, Radiofrequency, Variable	MIL-C-83446

2. Identification.

2.1 Part number. The part number is used for identifying a discrete chip radiofrequency coil and shall be in the following form:

M	83446	/03	-04	B

Prefix meaning MIL specification item

General specification number

Detail specification sheet number

Sequentially assigned dash numbers

Termination finish


Termination finish.

Code	Final finish	Method of assembly
A	Gold over nickel	Solderable/weldable
B	Tin - lead over nickel	Solderable
C	Tin plated	Solderable
D	Platinum - gold	Solderable/weldable
E	Palladium - silver	Solderable/weldable
F	Tin - lead	Solderable

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/1, COILS, CHIP, RADIOFREQUENCY, FIXED

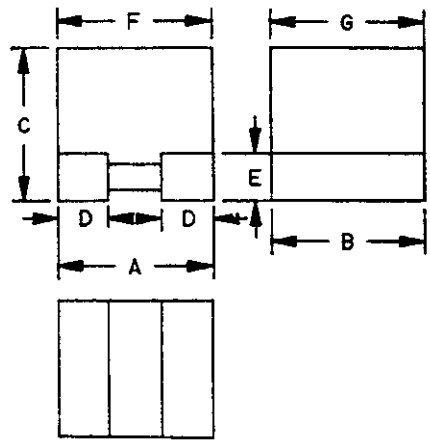

	Inches	mm
A	.150 ±.005	3.81 ±0.13
B	.120 ±.005	3.05 ±0.13
C	.080 max	2.03 max
D	.025 ±.005	0.64 ±0.13
E	.035 min	0.89 min
F	.155 max	3.94 max
G	.125 max	3.18 max

REQUIREMENTS

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the currentversion before use.

MIL-C-83446/1, COILS, CHIP, RADIOFREQUENCY, FIXED.

TABLE I. Electrical characteristics (initial) and dash numbers.

Part number M83446/1- 1/	Inductance 2/	Q (min)	Q (typ)	1/ Test frequency	Self resonant frequency (min)	DC resistance (max)	Current (max)
	µH			MHz	MHz	Ohms	mA
01	0.010	48	58	150	900	0.050	650
02	0.012	"	"	"	"	0.055	"
03	0.015	"	"	"	"	0.060	"
04	0.018	"	"	"	"	0.065	"
05	0.022	"	"	100	"	0.070	"
06	0.027	"	"	"	"	0.075	"
07	0.033	"	"	"	"	0.075	"
08	0.039	"	"	"	"	0.080	"
09	0.047	"	"	"	850	0.085	"
10	0.056	"	"	"	800	0.088	"
11	0.068	"	"	"	750	0.093	"
12	0.082	"	"	"	700	0.095	"
13	0.100	50	60	25	600	0.075	"
14	0.120	"	"	"	550	0.075	"
15	0.150	"	"	"	420	0.085	"
16	0.180	"	"	"	390	0.10	650
17	0.220	"	"	"	340	0.11	640
18	0.270	"	"	"	290	0.12	620
19	0.330	"	"	"	230	0.14	590
20	0.390	"	"	"	210	0.16	550
21	0.470	"	"	"	190	0.18	520
22	0.560	"	"	"	180	0.20	500
23	0.680	"	"	"	170	0.23	460
24	0.820	"	"	"	150	0.26	430
25	1.00	"	"	"	140	0.34	380
26	1.20	36	45	7.90	130	0.42	370
27	1.50	36	45	"	120	0.56	320
28	1.80	36	45	"	100	0.76	280
29	2.20	36	45	"	98	0.93	250
30	2.70	40	50	"	91	1.2	220
31	3.30	40	50	"	76	1.3	210
32	3.90	47	60	"	48	1.5	200
33	4.70	47	60	"	46	1.7	180
34	5.60	44	55	"	42	1.8	170
35	6.80	40	50	"	39	1.9	160
36	8.20	40	50	"	30	2.4	150
37	10.0	46	58	"	26	3.2	130
38	12.0	41	52	2.50	24	3.7	120
39	15.0	46	58	"	23	3.8	110
40	18.0	46	60	"	22	4.2	100
41	22.0	47	60	"	18	5.5	98
42	27.0	47	60	"	17	6.1	95
43	33.0	47	60	"	13	6.6	92
44	39.0	50	62	"	12	7.0	88
45	47.0	"	"	"	11	8.3	85
46	56.0	"	"	"	10	8.9	82
47	68.0	"	"	"	9.1	13.0	67
48	82.0	"	"	"	8.6	14.0	65
49	100.0	47	60	"	7.6	16.0	61
50	120.0	30	38	0.790	6.8	17.0	59
51	150.0	32	40	"	5.6	18.0	57
52	180.0	"	"	"	4.5	22.0	52
53	220.0	"	"	"	4.0	28.0	46
54	270.0	"	"	"	3.8	32.0	43
		"	"	"			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-C-83446/1, COILS, CHIP, RADIOFREQUENCY, FIXED - Continued.

TABLE I. Electrical characteristics (initial) and dash numbers - Continued.

Part number M83446/1-1/	Inductance 2/	Q (min)	Q (typ)	1/ Test frequency	Self resonant frequency (min)	DC resistance (max)	Current (max)
	µH			MHz	MHz	Ohms	mA
55	330.0	32	40	0.790	3.5	44.0	37
56	390.0	32	40	"	3.4	48.0	35
57	470.0	28	35	"	3.2	75.0	28
58	560.0	"	"	"	2.8	81.0	27
59	680.0	"	"	"	2.7	93.0	23
60	820.0	"	"	"	2.0	112.0	21
61	1000.0	"	"	"	1.7	120.0	19


1/ Complete part number shall include code letter for termination material.

2/ Inductance tolerance: 0.01 to 0.082 µH ±20%.
0.10 to 0.0820 µH ±10%.
1 to 1,000 µH ±5%.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the currentversion before use.

SECTION 501

MIL-C-83446/4, COILS, CHIP, RADIOFREQUENCY, FIXED

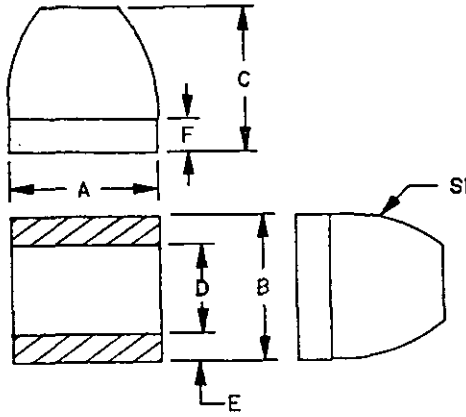

Dimension	Inches	mm
A	.100 ±.010	2.54 ±0.25
B	.100 ±.010	2.54 ±0.25
C	.085 max	2.16 max
D	.030 min	0.76 min
E	.015 min 2 PL	0.38 min
F	.020 max 2 PL	0.51 max

REQUIREMENTS:

Weight: 0.05 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 200 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 80 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/4, COILS, CHIP, RADIOFREQUENCY, CHIP.

TABLE I. Electrical characteristics (initial) and dash numbers.


Part number M83446/4- 1/	Inductance (±10%)	Q (min)	Test frequency	Self-resonant frequency (min)	DC resistance (max)	current (max)
	µH		MHz	MHz	Ohms	mA
01	0.12	30	25	750	0.125	880
02	0.15	25	"	650	0.175	745
03	0.18	"	"	550	0.200	695
04	0.22	"	"	450	0.220	665
05	0.27	"	"	375	0.230	650
06	0.33	"	"	300	0.235	645
07	0.39	22	"	235	0.240	635
08	0.47	"	"	215	0.260	610
09	0.56	"	"	195	0.278	590
10	0.68	"	"	175	0.520	435
11	0.82	"	"	160	0.530	430
12	1.0	"	"	145	0.540	425
13	1.2	"	7.9	130	0.740	360
14	1.5	"	"	115	0.840	340
15	1.8	"	"	105	0.920	325
16	2.2	"	"	85	1.00	310
17	2.7	24	"	77	1.15	290
18	3.3	"	"	70	1.40	260
19	3.9	"	"	68	1.55	250
20	4.7	"	"	60	1.80	230
21	5.6	22	"	55	2.00	220
22	6.8	22	"	50	2.20	210
23	8.2	22	"	48	2.50	195
24	10.0	24	"	40	3.45	165
25	12.0	25	2.5	35	3.80	160
26	15.0	"	"	30	5.60	135
27	18.0	"	"	28	5.80	130
28	22.0	"	"	25	6.40	125
29	27.0	"	"	22	6.90	120
30	0.010±20%	60	50	2700	0.060	1270
31	0.015 "	55	"	2200	0.078	1110
32	0.022 "	50	"	1800	0.108	950
33	0.033 "	48	"	1450	0.120	900
34	0.047 "	42	"	1220	0.145	820
35	0.068 "	36	"	1000	0.195	705
36	0.100 "	32	"	830	0.230	650

1/ Complete part number shall include code letter of termination material.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the currentversion before use.


SECTION 501

MIL-C-83446/5, COILS, CHIP, RADIOFREQUENCY, FIXED

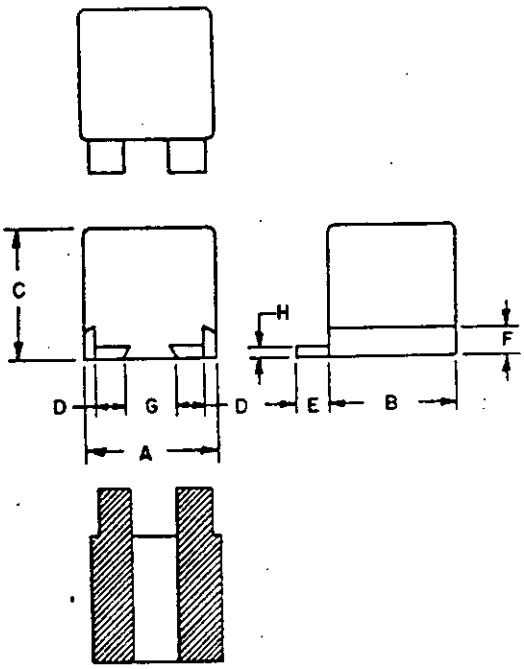

For dash numbers 01 thru 37

(with tabs)

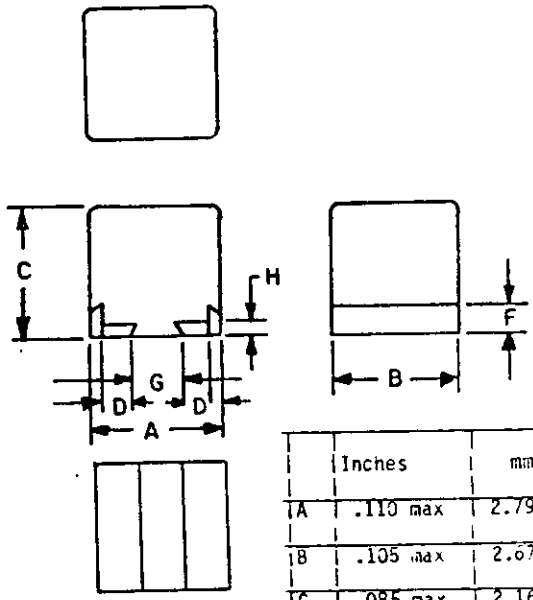

For dash numbers 38 thru 74

(without tabs)

	Inches	mm
A	.110 max	2.79 max
B	.105 max	2.67 max
C	.085 max	2.16 max
D	.030 ±.005	0.76 ±0.13
E	.040 ±.010	1.02 ±0.25
F	.018 ±.005	0.46 ±0.13
G	.038 ±.010	0.97 ±0.25
H	.005 ±.002	0.13 ±0.05

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/5, COILS, CHIP, RADIOFREQUENCY, FIXED.

TABLE I. Electrical characteristics (initial).


Part number M83446/5- 1/	Inductance ±10% (μH)	Q (min)	Test frequency (MHz)	Self resonant frequency (min)(MHz)	DC resistance (max) (ohms)	Current (max) (mA)
01, 38	0.010	60	150	2000	0.025	750
02, 39	0.012	"	"	2000	0.025	"
03, 40	0.015	"	"	1800	0.040	"
04, 41	0.018	"	"	1500	"	"
05, 42	0.022	51	100	1400	"	"
06, 43	0.027	51	"	1200	"	"
07, 44	0.033	47	"	1200	0.050	640
08, 45	0.039	"	"	1200	0.070	600
09, 46	0.047	"	"	1000	0.080	550
10, 47	0.056	"	"	900	0.090	520
11, 48	0.068	"	"	900	0.10	480
12, 49	0.082	"	"	750	0.11	470
13, 50	0.100	"	50	700	0.11	470
14, 51	0.120	"	"	600	0.11	470
15, 52	0.150	"	"	500	0.12	450
16, 53	0.180	51	"	450	0.14	430
17, 54	0.220	"	"	420	0.20	350
18, 55	0.270	"	"	400	0.25	310
19, 56	0.330	"	"	320	0.30	280
20, 57	0.390	47	"	270	0.45	240
21, 58	0.470	47	25	250	0.50	230
22, 59	0.560	52	"	200	0.55	220
23, 60	0.680	"	"	180	0.58	210
24, 61	0.820	"	"	150	0.60	200
25, 62	1.00	"	"	120	0.65	190
26, 63	1.20	42	7.90	110	0.75	180
27, 64	1.50	42	"	100	1.1	160
28, 65	1.80	48	"	95	1.2	150
29, 66	2.20	"	"	90	1.3	140
30, 67	2.70	"	"	65	1.5	130
31, 68	3.30	"	"	55	1.8	120
32, 69	3.90	"	"	45	2.0	110
33, 70	4.70	"	"	43	2.3	100
34, 71	5.60	"	"	40	2.5	100
35, 72	6.80	46	"	38	2.6	98
36, 73	8.20	46	"	35	2.8	95
37, 74	10.0	46	"	33	3.3	87

1/ Complete part number shall include code letter for termination material.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.


SECTION 501

MIL-C-83446/6, COILS, CHIP, RADIOFREQUENCY, FIXED

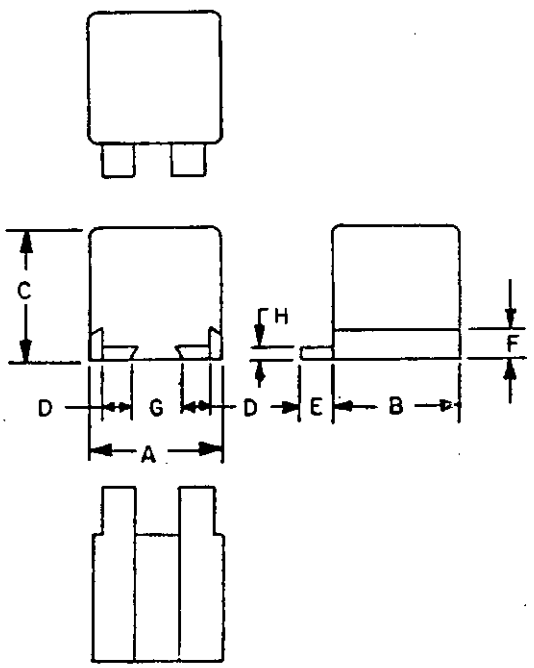

For dash numbers 01 thru 24

(with tabs)

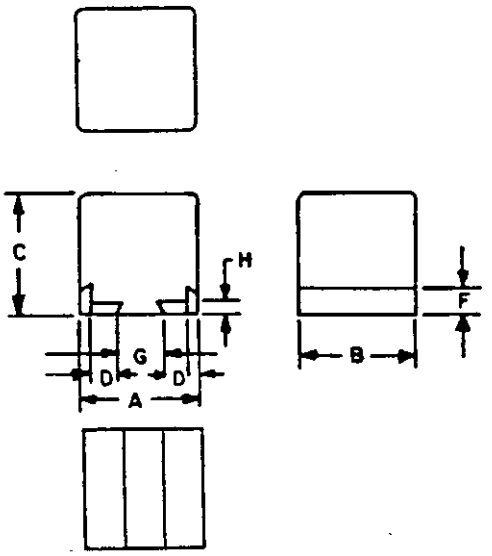

For dash numbers 25 thru 48

(without tabs)

	Inches	mm
A	.110 max	2.79 max
B	.105 max	2.67 max
C	.100 max	2.54 max
D	.030 ±.005	0.76 ±0.13
E	.040 ±.010	1.02 ±0.25
F	.018 ±.005	0.46 ±0.13
G	.038 ±.010	0.97 ±0.25
H	.005 ±.002	0.13 ±0.05

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/6, COILS, CHIP, RADIOFREQUENCY, FIXED.


TABLE I. Electrical characteristics (initial) and dash number.

Part number M83446/6-	Inductance ±10%	Q (min)	Test frequency	Self resonant frequency (min)	DC resistance (max)	Current (max)
	µH		MHz	MHz	Ohms	mA
01, 25	12.0	42	2.5	26	2.0	110
02, 26	15.0	44	"	24	2.2	105
03, 27	18.0	44	"	21	2.8	100
04, 28	22.0	48	"	20	3.5	85
05, 29	27.0	49	"	19	4.3	75
06, 30	33.0	50	"	14	5.5	68
07, 31	39.0	52	"	12	6.5	61
08, 32	47.0	53	"	11	8.5	54
09, 33	56.0	56	"	10	12.0	46
10, 34	68.0	53	"	9	13.0	42
11, 35	82.0	49	"	8	15.0	40
12, 36	100.0	49	"	7	18.0	36
13, 37	120.0	37	0.790	6	21.0	34
14, 38	150.0	30	"	5	26.0	31
15, 39	180.0	30	"	5	28.0	29
16, 40	220.0	26	"	4.5	32.0	28
17, 41	270.0	26	"	4.0	36.0	26
18, 42	330.0	24	"	3.7	42.0	24
19, 43	390.0	24	"	3.5	46.0	23
20, 44	470.0	24	"	3.0	68.0	19
21, 45	560.0	22	"	2.8	77.0	18
22, 46	680.0	20	"	2.5	85.0	17
23, 47	820.0	16	"	2.0	100.0	16
24, 48	1000.0	12	"	1.5	120.0	15


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/8, COILS, CHIP, RADIOFREQUENCY, FIXED

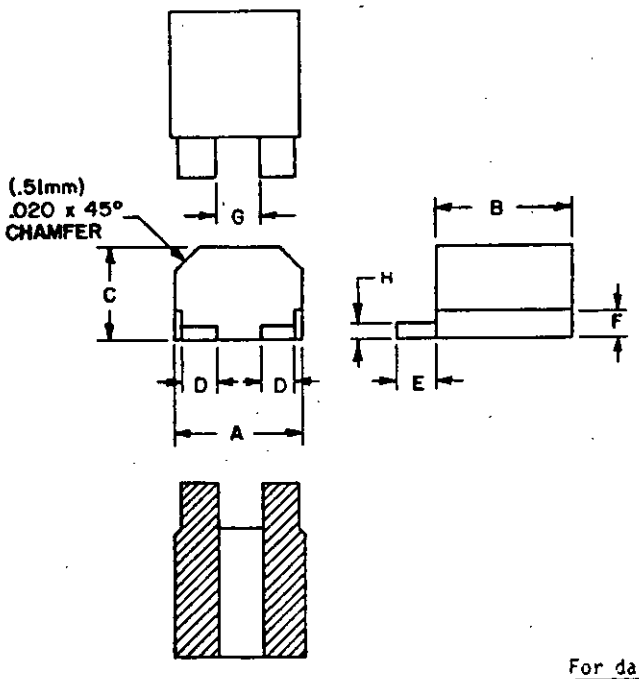

For dash numbers 01 through 49
(with tabs)

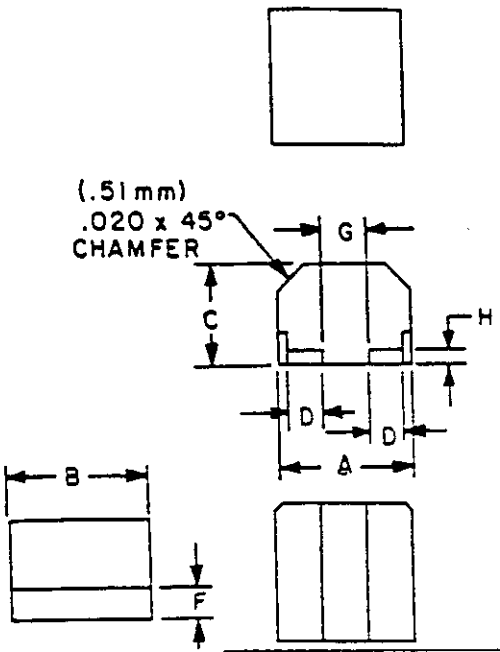

For dash numbers 50 thru 98
(without tabs)

	Inches	mm
A	.120 max	3.05 max
B	.105 max	2.67 max
C	.065 max	1.65 max
D	.030 ±.005	0.76 ±0.13
E	.040 +.015 -.010	1.02 +0.38 -0.25
F	.013 ±.005	0.45 ±0.13
G	.038 ±.010	0.97 ±0.25
H	.005 ±.002	0.13 ±0.05

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/8, COILS, CHIP, RADIOFREQUENCY, FIXED - Continued.

TABLE I. Electrical characteristics (initial).


Part number M83446/8- 1/	Inductance ±10% (μH)	Q (min)	Test frequency (MHz)	Self resonant frequency (min)(MHz)	DC resistance (max) (ohms)	Current (max) (mA)
1, 50	0.010	60	150	2000	0.025	750
2, 51	0.012	"	"	2000	0.025	"
3, 52	0.015	"	"	1800	0.040	"
4, 53	0.018	"	"	1500	"	"
5, 54	0.022	51	100	1400	"	"
6, 55	0.027	51	"	1200	"	"
7, 56	0.033	47	"	1100	0.05	640
8, 57	0.039	"	"	1000	0.07	600
9, 58	0.047	"	"	900	0.08	550
10, 59	0.056	"	"	850	0.09	520
11, 60	0.068	"	"	840	0.10	480
12, 61	0.082	"	"	750	0.11	470
13, 62	0.100	"	50	580	0.11	470
14, 63	0.120	"	"	240	0.11	470
15, 64	0.150	"	"	230	0.12	450
16, 65	0.180	51	"	"	0.14	430
17, 66	0.220	"	"	"	0.20	350
18, 67	0.270	"	"	"	0.25	310
19, 68	0.330	"	"	200	0.30	280
20, 69	0.390	47	"	190	0.45	240
21, 70	0.470	47	25	180	0.50	230
22, 71	0.560	45	"	170	"	"
23, 72	0.680	"	"	160	"	"
24, 73	0.820	"	"	150	"	"
25, 74	1.00	"	"	130	"	"
26, 75	1.20	36	7.90	120	0.60	200
27, 76	1.50	36	"	100	1.1	160
28, 77	1.80	38	"	90	1.1	160
29, 78	2.20	38	"	85	1.5	130
30, 79	2.70	41	"	80	1.7	125
31, 80	3.30	42	"	75	1.8	120
32, 81	3.90	42	"	65	2.0	110
33, 82	4.70	41	"	55	2.3	100
34, 83	5.60	41	"	45	2.6	98
35, 84	6.80	36	"	40	2.8	94
36, 85	8.20	"	"	35	3.0	90
37, 86	10.0	"	"	33	3.3	87
38, 87	12.0	"	"	26	4.0	79
39, 88	15.0	32	2.50	24	4.2	79
40, 89	18.0	"	"	21	4.4	75
41, 90	22.0	"	"	19	7.5	57
42, 91	27.0	"	"	14	8.0	55
43, 92	33.0	30	"	12	13	45
44, 93	39.0	"	"	10	17	38
45, 94	47.0	"	"	9.0	19	36
46, 95	56.0	"	"	8.5	23	33
47, 96	68.0	"	"	8.2	25	32
48, 97	82.0	"	"	8.0	28	30
49, 98	100.0	"	"	7.0	31	28

1/ Complete part number shall include code letter for termination material.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.


SECTION 501

MIL-C-83446/10, COILS, CHIP, RADIOFREQUENCY, FIXED

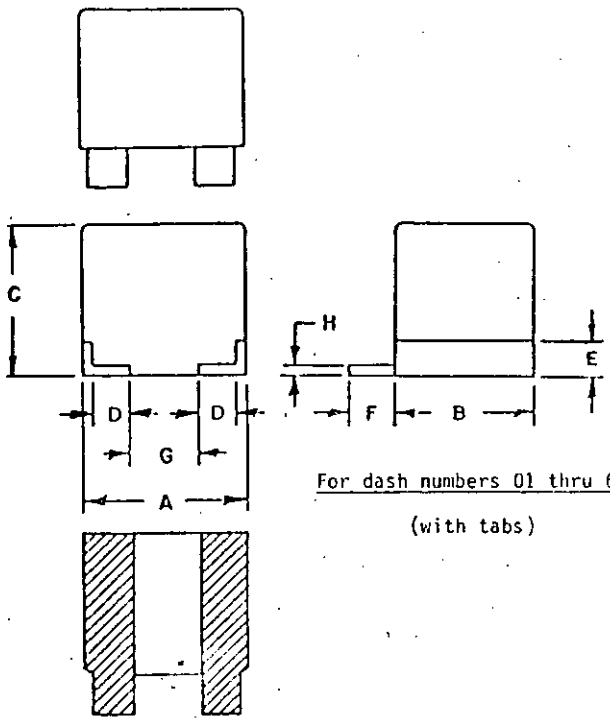

For dash numbers 01 thru 61

(with tabs)

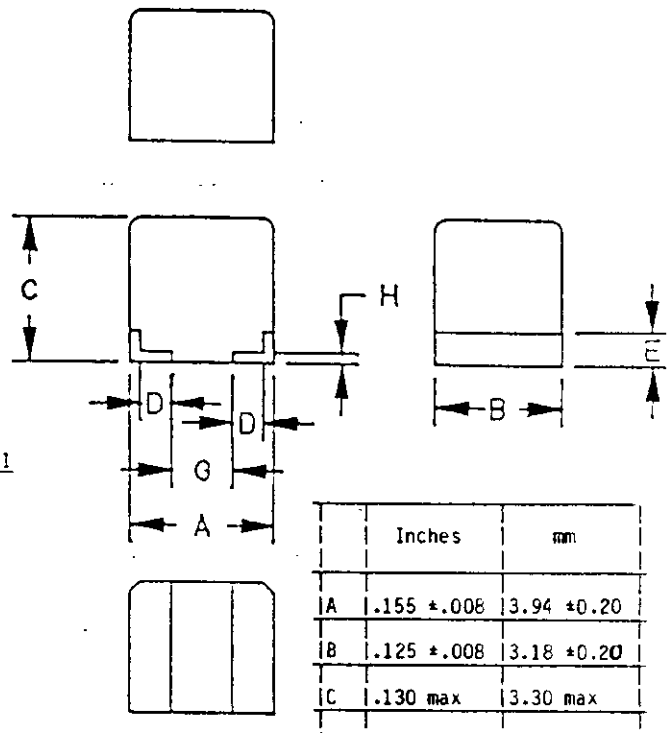

For dash numbers 62 thru 122

(without tabs)

	Inches	mm
A	.155 ±.008	3.94 ±0.20
B	.125 ±.008	3.18 ±0.20
C	.130 max	3.30 max
D	.037 ±.003	0.94 ±0.08
E	.020 ±.005	0.51 ±0.13
F	+.015 .040 -.010	+0.38 1.02 -0.25
G	.073 min	1.85 min
H	.005 ±.002	0.13 ±0.05

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/10, COILS, CHIP, RADIOFREQUENCY, FIXED.

TABLE I. Electrical characteristics (initial).

Part number M83446/10-1/	Inductance ±10% (μH)	Q (min)	Test frequency (MHz)	Self resonant frequency (min)(MHz)	DC resistance (max) (ohms)	Current (max) (mA)
1, 62	0.010	60	150	2000	0.04	1000
2, 63	0.012	70	"	1800	"	"
3, 64	0.015	75	"	1500	"	"
4, 65	0.018	75	"	1500	"	"
5, 66	0.022	60	100	1300	0.05	"
6, 67	0.027	"	"	1300	0.05	"
7, 68	0.033	"	"	1000	0.05	
8, 69	0.039	"	"	1000	0.06	900
9, 70	0.047	65	"	800	0.06	900
10, 71	0.056	"	"	760	0.06	900
11, 72	0.068	"	"	700	0.07	840
12, 73	0.082	"	"	650	"	"
13, 74	0.100	"	50	570	"	"
14, 75	0.120	"	"	520	"	"
15, 76	0.150	75	"	400	0.08	790
16, 77	0.180	75	"	360	0.08	790
17, 78	0.220	70	"	320	0.08	790
18 ,79	0.270	"	"	270	0.10	700
19, 80	0.330	"	"	240	0.10	700
20, 81	0.390	"	"	220	0.10	700
21, 82	0.470	"	25	190	0.14	590
22, 83	0.560	"	"	170	0.19	510
23, 84	0.680	"	"	160	0.26	430
24, 85	0.820	75	"	150	0.30	400
25, 86	1.00	75	"	130	0.34	380
26, 87	1.20	65	7.9	120	0.45	330
27, 88	1.50	"	"	110	0.57	290
28, 89	1.80	"	"	100	0.72	260
29, 90	2.20	"	"	80	0.9	230
30, 91	2.70	"	"	60	1.1	210
31, 92	3.30	60	"	50	1.2	200
32, 93	3.90	60	"	45	1.4	180
33, 94	4.70	60	"	42	1.6	170
34, 95	5.60	65	"	40	1.8	160
35, 96	6.80	"	"	37	2.4	140
36, 97	8.20	"	"	34	3.0	130
37, 98	10.0	"	"	29	3.5	120
38, 99	12.0	60	2.5	27	3.6	118
39, 100	15.0	"	"	22	3.7	115
40, 101	18.0	"	"	17	3.8	114
41, 102	22.0	"	"	16	3.9	113
42, 103	27.0	65	"	15	4	110
43, 104	33.0	65	"	14	5	100
44, 105	39.0	65	"	13	7	84
45, 106	47.0	70	"	12	8	79
46, 107	56.0	70	"	11	10	70
47, 108	68.0	65	"	10	11	67
48, 109	82.0	50	"	9	12	64
49, 110	100.0	60	"	8	13	62
50, 111	120.0	40	0.79	7	14	59
51, 112	150.0	"	"	6	16	56
52, 113	180.0	"	"	5	18	52
53, 114	220.0	"	"	4	24	45

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) - Continued.


Part number M83446/10- 1/	Inductance ±10% (µH)	Q (min)	Test frequency (MHz)	Self resonant frequency (min)(MHz)	DC resistance (max) (ohms)	Current (max) (mA)
54, 115	270	40	0.79	3.3	25	44
55, 116	330	40	"	3.1	29	41
56, 117	390	40	"	2.9	32	39
57, 118	470	35	"	2.4	35	37
58, 119	560	35	"	2.1	45	33
59, 120	680	35	"	1.9	55	30
60, 121	820	30	"	1.8	70	26
61, 122	1000	30	"	1.7	80	25

1/ Complete part number shall include code letter for termination material.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.


SECTION 501

MIL-C-83446/11, COILS, CHIP, RADIOFREQUENCY, SHIELDED FIXED

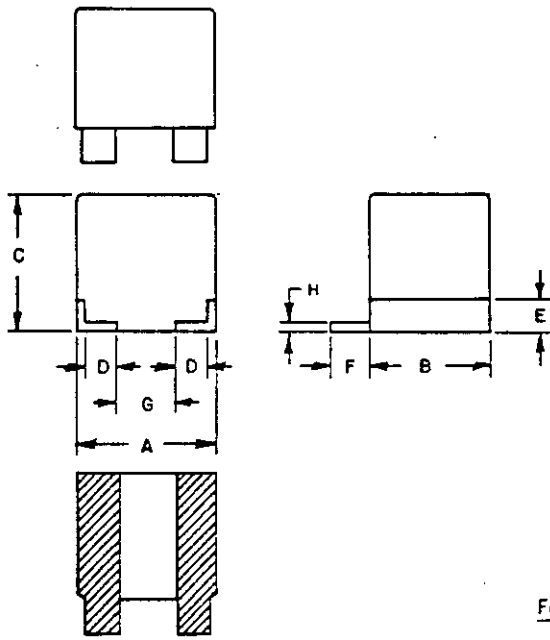

For dash numbers 01 thru 61

(with tabs)

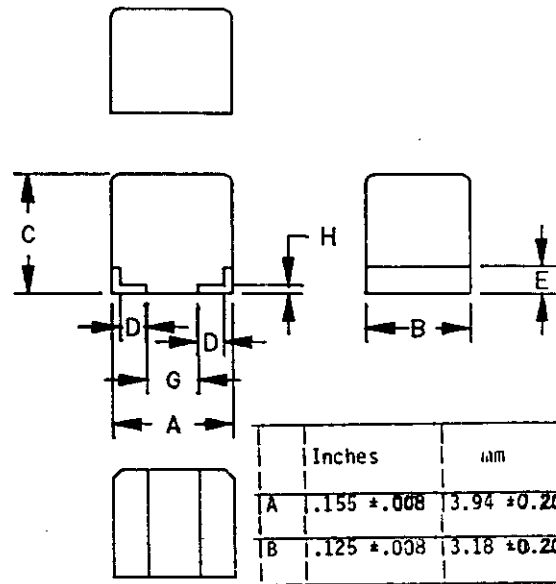

For dash numbers 62 thru 122

(without tabs)

	Inches	mm
A	.155 ±.008	3.94 ±0.20
B	.125 ±.008	3.18 ±0.20
C	.130 max	3.30 max
D	.037 ±.003	0.94 ±0.08
E	.020 -.005	0.51 ±0.13
F	.040 +.015 -.010	1.02 +0.38 -0.25
G	.073 min	1.85 min
H	.005 ±.002	0.13 ±0.05

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Percent coupling = 3 percent maximum, mounted with the X-Y surfaces, side by side but not touching.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/11, COILS, CHIP, RADIOFREQUENCY, SHIELDED FIXED

TABLE I. Electrical characteristics (initial).

Part number M83446/11-	Inductance ±10% (µH)	Q (min)	Test frequency (MHz)	Self resonant frequency (min)(MHz)	DC resistance (max) (ohms)	Current (max) (mA)	Incremental current (max) (mA)
1, 62	0.10	90	25	600	0.03	1000	280
2, 63	0.12	"	"	520	0.03	"	"
3, 64	0.15	"	"	490	0.03	"	"
4, 65	0.18	"	"	460	0.04	"	"
5, 66	0.22	"	"	430	0.04	"	"
6, 67	0.27	100	"	370	0.04	"	"
7, 68	0.33	105	"	310	0.05	750	200
8, 69	0.39	115	"	280	0.05	750	200
9, 70	0.47	"	"	260	0.05	750	200
10, 71	0.56	"	"	240	0.06	700	190
11, 72	0.68	"	"	200	0.06	700	190
12, 73	0.82	"	"	185	0.06	700	190
13, 74	1.0	"	"	175	0.09	650	170
14, 75	1.2	90	7.9	150	0.09	650	170
15, 76	1.5	100	"	135	0.14	600	150
16, 77	1.8	"	"	120	0.20	500	130
17, 78	2.2	"	"	105	0.30	400	100
18, 79	2.7	"	"	85	0.40	350	88
19, 80	3.3	"	"	80	0.46	330	83
20, 81	3.9	105	"	64	0.52	310	78
21, 82	4.7	115	"	56	0.54	300	75
22, 83	5.6	"	"	49	0.60	285	72
23, 84	6.8	"	"	45	0.66	270	68
24, 85	8.2	"	"	41	1.00	225	57
25, 86	10.0	"	"	39	1.020	200	50
26, 87	12.0	100	2.5	34	1.5	180	43
27, 88	15.0	100	"	30	1.8	170	41
28, 89	18.0	100	"	26	1.9	160	38
29, 90	22.0	105	"	23	2.1	150	36
30, 91	27.0	110	"	20	2.4	140	34
31, 92	33.0	115	"	18	2.7	130	32
32, 93	39.0	115	"	17	3.1	125	29
33, 94	47.0	115	"	16	3.2	125	29
34, 95	56.0	110	"	14	3.5	120	28
35, 96	68.0	"	"	12	4.0	111	26
36, 97	82.0	"	"	10	4.8	102	23
37, 98	100.0	"	"	4.4	5.7	93	20
38, 99	120.0	85	0.79	8.0	6.2	89	20
39, 100	150.0	"	"	8.0	6.3	89	20
40, 101	180.0	"	"	6.9	6.4	88	19
41, 102	220.0	"	"	6.1	7.4	82	18
42, 103	270	"	"	5.2	8.1	78	17
43, 104	330	100	"	4.6	8.8	75	16
44, 105	390	"	"	4.0	9.7	72	16
45, 106	470	"	"	3.6	10.0	69	15
46, 107	560	"	"	2.8	11.0	66	14
47, 108	680	"	"	2.3	12.0	64	13
48, 109	820	95	"	2.1	17.0	53	11
49, 110	1000	95	"	2.0	22.0	47	10
50, 111	1200	75	0.25	1.7	24.0	45	9
51, 112	1500	"	"	1.6	25.0	44	9
52, 113	1800	"	"	1.5	27.0	43	9
53, 114	2200	"	"	1.4	30.0	40	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501


MIL-C-83446/11, COILS, CHIP, RADIOFREQUENCY, SHIELDED FIXED.

TABLE I. Electrical characteristics (initial) - Continued.

Part number M83446/11- 1/	Inductance ±10% (μH)	Q (min)	Test frequency (MHz)	Self resonant frequency (min)(MHz)	DC resistance (max) (ohms)	Current (max) (mA)	Incremental current (max) (mA)
54, 115	2700	75	0.25	1.3	34.0	38	8
55, 116	3300	"	"	1.2	39.0	35	7.5
56, 117	3900	"	"	1.1	56.0	29	5.5
57, 118	4700	"	"	1.0	70.0	26	5.0
58, 119	5600	"	"	0.90	80.0	25	5.0
59, 120	6800	"	"	0.80	90.0	23	4.5
60, 121	8200	"	"	0.70	100.0	22	4.5
61, 122	10000	"	"	0.70	110.0	21	4.0

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-C-83446/12, COILS, CHIP, RADIOFREQUENCY, FIXED

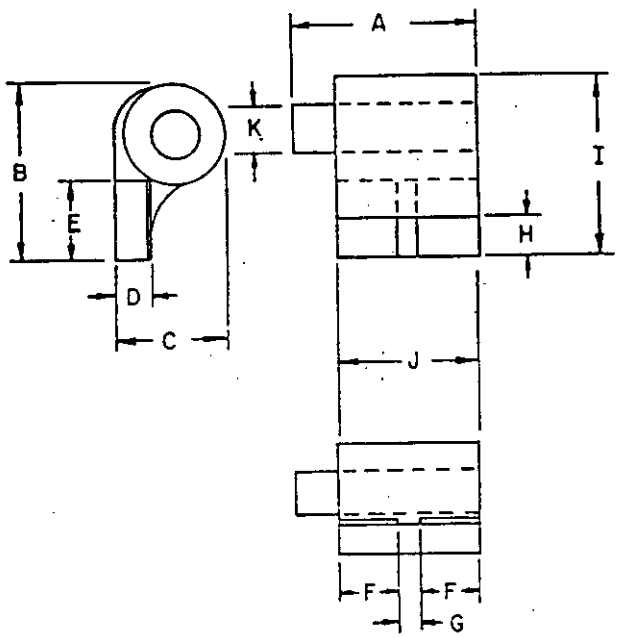

	Inches	mm
A.	.180 max	4.57 max
B.	.140 max	3.56 max
C.	.095 max (-50 thru -61)	2.41 max
	.065 max (-1 thru -49)	1.65 max
D.	.025 ±.005	.64 ±.13
E.	.057 ±.002	1.45 ±.05
F.	.045 ±.005	1.14 ±.13
G.	.005 min	.13 min
H.	.020 min	.51 min
I.	.140 max	3.56 max
J.	.102 ±.003	2.59 ±.08
K.	.033 ±.002 dia	.84 ±.05

REQUIREMENTS

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-C-83446/12, COILS, CHIP, RADIOFREQUENCY, FIXED

TABLE I. Electrical characteristics (initial) and dash numbers.

Part number M83446/12-	Inductance microhenries µH ±10	Q (min)	Q (typ)	Test frequency MHz	Self-resonant frequency min MHz	DC resistance max Ohms	Rated current (max) mA
01	0.010	36	60	200	1200	0.020	750
02	0.012	30	"	"	"	0.025	"
03	0.015	30	"	"	"	0.035	"
04	0.018	30	"	"	"	0.040	"
05	0.022	45	"	"	1000	0.045	"
06	0.027	30	"	"	"	0.050	
07	0.033	"	"	"	"	0.055	640
08	0.039	"	55	"	"	0.060	600
09	0.047	"	"	100	"	0.065	550
10	0.056	"	"	"	"	0.060	520
11	0.068	20	"	"	800	0.060	480
12	0.082	20	"	"	800	0.060	470
13	0.100	30	50	25.0	750	0.160	460
14	0.120	32	"	"	700	0.170	455
15	0.150	40	"	"	650	0.190	450
16	0.180	30	"	"	600	0.200	430
17	0.220	42	"	"	570	0.300	350
18	0.270	40	"	"	500	0.350	310
19	0.330	36	"	"	400	0.720	280
20	0.390	35	"	"	380	0.800	250
21	0.470	38	"	"	450	1.26	230
22	0.560	40	"	"	400	1.30	220
23	0.680	40	"	"	300	1.40	210
24	0.820	40	45	"	250	1.50	200
25	1.0	37	"	"	220	1.60	200
26	1.2	35	"	7.90	175	1.70	200
27	1.5	31	"	"	135	2.50	190
28	1.8	30	"	"	120	3.00	185
29	2.2	40	"	"	95	3.30	180
30	2.7	32	45	"	85	3.65	175
31	3.3	32	50	"	70	4.00	170
32	3.9	32	50	"	60	2.10	165
33	4.7	32	45	"	50	2.30	165
34	5.6	35	45	"	40	2.30	165
35	6.8	43	50	"	30	1.30	165
36	8.2	40	45	"	22	4.00	120
37	10.0	40	45	"	20	2.90	105
38	12.0	35	45	2.50	15	3.50	91
39	15.0	"	40	"	13	2.30	87
40	18.0	"	45	"	12	3.70	81
41	22.0	"	"	"	10	4.00	77
42	27	38	"	"	9.0	5.00	73
43	33	35	"	"	9.0	5.70	69
44	39	"	"	"	6.5	6.50	65
45	47	"	"	"	6.2	6.00	63
46	56	"	40	"	6.0	6.30	60
47	68	30	45	"	5.8	6.70	57
48	82	35	45	"	5.2	7.50	55
49	100	33	40	"	4.0	13.0	50
50	120	33	"	0.790	4.0	14.0	40
51	150	35	"	"	3.9	16.0	36
52	180	"	"	"	3.5	18.0	33
53	220	"	"	"	3.2	21.0	28


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) and dash numbers - Continued.

Part number M83446/12-	Inductance microhenries µH ±10	Q (min)	Q (typ)	Test frequency MHz	Self-resonant frequency min MHz	DC resistance max Ohms	Rated current (max) mA
54	270	35	40	0.790	3.1	23.0	25
55	330	"	"	"	2.8	37.0	20
56	390	"	"	"	2.5	39.0	17
57	470	"	"	"	2.3	45.0	15
58	560	"	"	"	2.2	47.0	13
59	680	"	"	"	2.1	62.0	12
60	820	"	"	"	2.1	78.0	11
61	1000	33	"	"	1.1	96.0	10

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-C-83446/15, COILS, CHIP, RADIOFREQUENCY, FIXED

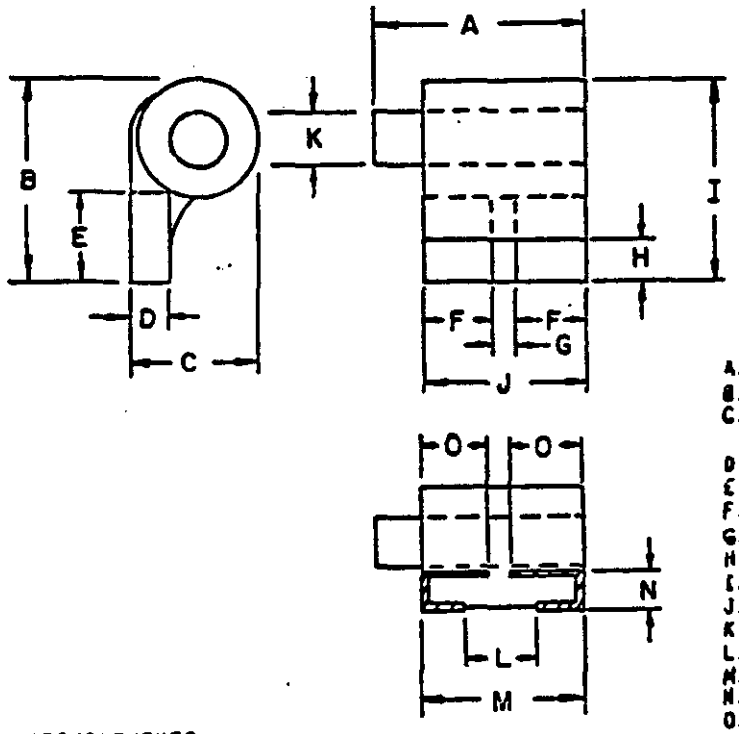

	Inches	mm
A.	.180 max	4.57 max
B.	.140 max	3.56 max
C.	.095 max (-50 thru -61)	2.41 max
	.065 max (-1 thru -49)	1.65 max
D.	.040 ±.010	1.02 ±.25
E.	.045 ±.005	1.14 ±.13
F.	.045 ±.005	1.14 ±.13
G.	.010 ±.002	.25 ±.05
H.	.020 min	.51 min
I.	.140 max	3.56 max
J.	.100 ±.005	2.54 ±.13
K.	.033 ±.002 dia	.84 ±.05
L.	.030 ±.005	.76 ±.13
M.	.100 ±.005	2.54 ±.13
N.	.035 ±.005	.89 ±.13
O.	.045 ±.005	1.14 ±.13

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 501

MIL-C-83446/15, COILS, CHIP, RADIOFREQUENCY, FIXED

TABLE I. Electrical characteristics (initial) and dash numbers.

Part number M83446/15-	Inductance microhenries µH ±10	Q (min)	Q (typ)	Test frequency MHz	Self-resonant frequency min MHz	DC resistance max Ohms	Rated current (max) mA
01	0.010	36	60	200	1200	0.020	750
02	0.012	30	"	"	"	0.025	"
03	0.015	30	"	"	"	0.035	"
04	0.018	30	"	"	"	0.040	"
05	0.022	45	"	"	1000	0.045	"
06	0.027	30	"	"	"	0.050	"
07	0.033	"	"	"	"	0.055	640
08	0.039	"	55	"	"	0.060	600
09	0.047	"	"	100	"	0.065	550
10	0.056	"	"	"	"	0.060	520
11	0.068	20	"	"	800	0.060	480
12	0.082	20	"	"	800	0.060	470
13	0.100	30	50	25.0	750	0.160	460
14	0.120	32	"	"	700	0.170	455
15	0.150	40	"	"	650	0.190	450
16	0.180	30	"	"	600	0.200	430
17	0.220	42	"	"	570	0.300	350
18	0.270	40	"	"	500	0.350	310
19	0.330	36	"	"	400	0.720	280
20	0.390	35	"	"	380	0.800	250
21	0.470	38	"	"	450	1.26	230
22	0.560	40	"	"	400	1.30	220
23	0.680	40	"	"	300	1.40	210
24	0.820	40	45	"	250	1.50	200
25	1.0	37	"	"	220	1.60	200
26	1.2	35	"	7.90	175	1.70	200
27	1.5	31	"	"	135	2.50	190
28	1.8	30	"	"	120	3.00	185
29	2.2	40	"	"	95	3.30	180
30	2.7	32	45	"	85	3.65	175
31	3.3	32	50	"	70	4.00	170
32	3.9	32	50	"	60	2.10	165
33	4.7	32	45	"	50	2.30	165
34	5.6	35	45	"	40	2.30	165
35	6.8	43	50	"	30	1.30	165
36	8.2	40	45	"	22	4.00	120
37	10.0	40	45	"	20	2.90	105
38	12.0	35	45	2.50	15	3.50	91
39	15.0	"	40	"	13	2.30	87
40	18.0	"	45	"	12	3.70	81
41	22.0	"	"	"	10	4.00	77
42	27	38	"	"	9.0	5.00	73
43	33	35	"	"	9.0	5.70	69
44	39	"	"	"	6.5	6.50	65
45	47	"	"	"	6.2	6.00	63
46	56	"	40	"	6.0	6.30	60
47	68	30	45	"	5.8	6.70	57
48	82	35	45	"	5.2	7.50	55
49	100	33	40	"	4.0	13.0	50
50	120	33	"	0.790	4.0	14.0	40
51	150	35	"	"	3.9	16.0	36
52	180	"	"	"	3.5	18.0	33

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-C-83446/15, COILS, CHIP, RADIOFREQUENCY, FIXED


TABLE I. Electrical characteristics (initial) and dash numbers - Continued.

Part number M83446/15-	Inductance microhenries µH ±10	Q (min)	Q (typ)	Test Frequency MHz	Self-resonant frequency min MHz	DC resistance max Ohms	Rated current (max) mA
53	220	35	40	0.790	3.2	21.0	28
54	270	"	"	"	3.1	23.0	25
55	330	"	"	"	2.8	37.0	20
56	390	"	"	"	2.5	39.0	17
57	470	"	"	"	2.3	45.0	15
58	560	"	"	"	2.2	47.0	13
59	680	"	"	"	2.1	62.0	12
60	820	"	"	"	2.1	78.0	11
61	1000	33	"	"	1.1	96.0	10

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.


SECTION 502

MIL-C-83446/7, COILS, CHIP, RADIOFREQUENCY, VARIABLE

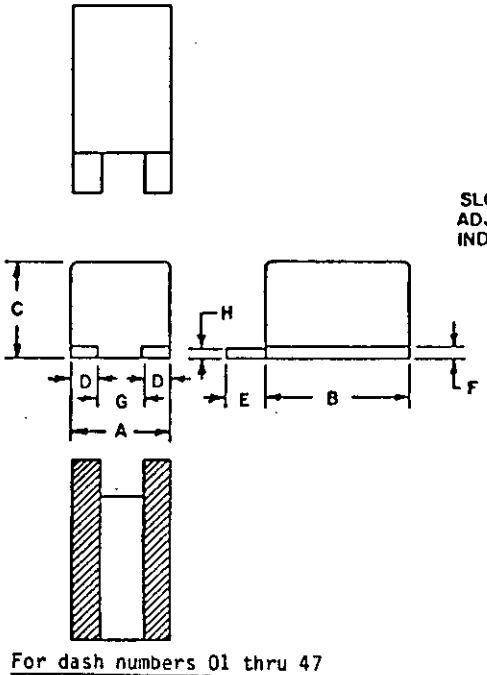

For dash numbers 01 thru 47

(with tabs)

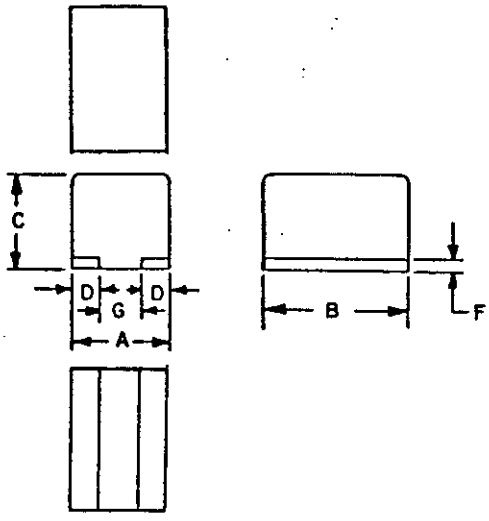

For dash numbers 48 thru 94

(without tabs)

	Inches	mm
A	.115 max	2.92 max
B	.170 max	4.32 max
C	.115 max	2.92 max
D	.030 ±.005	0.76 ±0.13
E	.040 $^{+.015}_{-.010}$	1.02 $^{+0.38}_{-0.25}$
F	.007 ±.003	0.18 ±0.08
G	.038 ±.010	0.97 ±0.25
H	.005 ±.002	0.13 ±0.05

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condtion C, MIL-STD-202 (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-C-83446/7, COILS, CHIP, RADIOFREQUENCY, VARIABLE

TABLE I. Electrical characteristics (initial).


Part number M83446/7- 1/	Inductance (µH) Min	Nom	Max	Q Min over L range	Test frequency (MHz)	Self-resonant frequency (min) (MHz)	DC resistance at 25°C (max) (Ohms)	current (max) (mA)	Incremental current (max) (mA)
01, 48	0.016	0.018	0.019	52	150	1200	0.02	750	---
02, 49	0.019	0.022	0.024	55	"	1100	0.02	"	---
03, 50	0.024	0.027	0.030	55	"	1000	0.03	"	---
04, 51	0.029	0.033	0.037	52	"	900	0.03	"	---
05, 52	0.035	0.039	0.043	52	"	750	0.03	"	---
06, 53	0.042	0.047	0.052	52	100	660	0.04	"	---
07, 54	0.049	0.056	0.062	55	"	610	0.04	"	---
08, 55	0.060	0.068	0.076	55	"	550	0.05	"	---
09, 56	0.072	0.082	0.092	55	"	520	0.06	640	---
10, 57	0.090	0.100	0.110	50	50	490	0.07	600	---
11, 58	0.105	0.120	0.135	50	"	460	0.07	600	---
12, 59	0.13	0.15	0.17	45	"	430	0.10	480	---
13, 60	0.16	0.18	0.20	"	"	385	0.12	450	---
14, 61	0.19	0.22	0.25	"	"	330	0.15	400	---
15, 62	0.24	0.27	0.31	"	"	275	0.20	350	---
16, 63	0.29	0.33	0.37	"	"	240	0.25	300	---
17, 64	0.35	0.39	0.44	42	"	210	0.35	260	---
18, 65	0.42	0.47	0.52	40	25	190	0.40	250	---
19, 66	0.50	0.56	0.62	"	"	165	0.50	230	---
20, 67	0.60	0.68	0.76	"	"	155	0.75	180	---
21, 68	0.73	0.82	0.92	"	"	145	0.90	160	---
22, 69	0.88	1.0	1.12	"	"	130	1.8	120	---
23, 70	1.05	1.2	1.35	"	"	120	1.9	115	---
24, 71	1.3	1.5	1.7	22	7.9	105	3.0	90	---
25, 72	1.5	1.8	2.0	22	"	95	3.5	85	---
26, 73	1.9	2.2	2.5	19	"	85	6.5	62	---
27, 74	2.4	2.7	3.0	"	"	80	7.0	60	---
28, 75	2.9	3.3	3.7	"	"	75	7.5	55	---
29, 76	3.5	3.9	4.3	"	"	70	10.0	50	---
30, 77	4.2	4.7	5.2	"	"	38	2.5	100	---
31, 78	5.0	5.6	6.2	22	"	36	2.5	100	---
32, 79	6.0	6.8	7.5	22	"	35	3.5	85	---
33, 80	7.3	8.2	9.1	21	"	30	4.5	75	---
34, 81	8.8	10	11.2	21	"	25	5.0	70	---
35, 82	10.6	12	13.4	21	"	20	5.5	65	---
36, 83	13.2	15	16.8	22	2.5	18	6.5	60	---
37, 84	15.8	18	20.1	"	"	17	11.0	47	---
38, 85	19.4	22	24.6	"	"	16	12.0	45	---
39, 86	23.7	27	30.2	"	"	13	13.5	43	---
40, 87	29.1	33	36.9	"	"	11	14.0	42	---
41, 88	34.3	39	43.6	"	"	10	18.0	37	7.5
42, 89	41.3	47	52.6	"	"	9	20.0	35	7.0
43, 90	49.2	56	62.7	"	"	8	22.0	34	6.8
44, 91	59.8	68	76.1	"	"	7	24.0	32	6.4
45, 92	60.0	82	100.0	"	"	6	38.0	25	5.0
46, 93	80.0	100	120.0	20	"	5.2	42.0	24	4.8
47, 94	100.0	120	150.0	20	"	5.0	52.0	22	4.5

1/ Complete part number shall include code letter for termination material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-C-83446/9, COILS, CHIP, RADIOFREQUENCY, VARIABLE

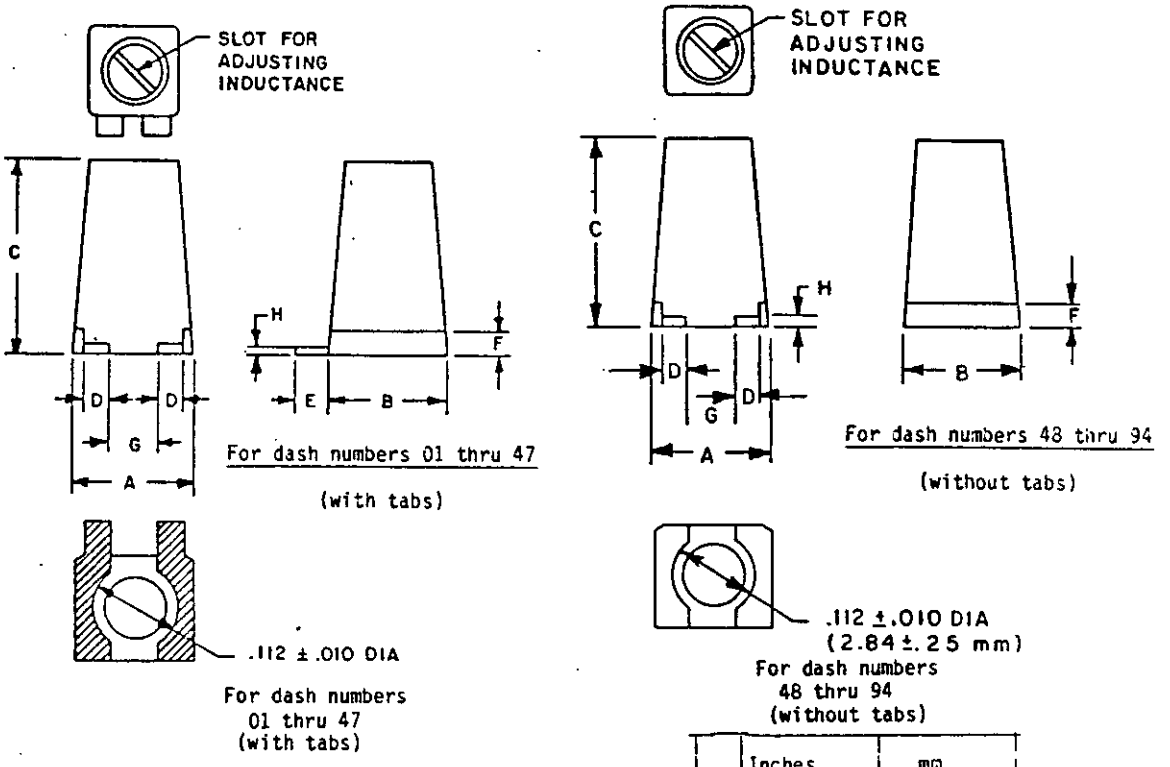

	Inches	mm
A	.165 max	4.19 max
B	.130 max	3.30 max
C	.225 max	5.72 max
D	.030 ±.010	0.76 ±0.25
E	.040 +.015 -.010	1.02 +0.38 -0.25
F	.020 ±.005	0.51 ±0.13
G	.073 min	.185 min
H	.005 ±.002	0.13 ±0.05

REQUIREMENTS:

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condtion C, MIL-STD-202 (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-C-83446/9, COILS, CHIP, RADIOFREQUENCY, VARIABLE


TABLE I. Electrical characteristics (initial).

Part number M83446/9- 1/	Inductance (µH) Min	Nom	Max	Q Min over L range	Test frequency (MHz)	Self-resonant frequency (min) (MHz)	DC resistance at 25°C (max) (Ohms)	current (max) (mA)	Incremental current (max) (mA)
01, 48	0.015	0.018	0.021	50	150	1200	0.03	750	---
02, 49	0.018	0.022	0.026	55	"	1100	0.03	"	---
03, 50	0.022	0.027	0.032	"	"	1000	0.03	"	---
04, 51	0.027	0.033	0.039	"	"	900	0.04	"	---
05, 52	0.033	0.039	0.047	"	"	750	0.04	"	---
06, 53	0.039	0.047	0.056	"	100	660	0.04	"	---
07, 54	0.047	0.056	0.068	"	"	610	0.05	700	---
08, 55	0.055	0.068	0.083	"	"	550	0.05	700	---
09, 56	0.067	0.082	0.099	"	"	520	0.06	645	---
10, 57	0.080	0.100	0.120	"	"	490	0.06	645	---
11, 58	0.096	0.120	0.144	50	50	460	0.07	600	---
12, 59	0.12	0.15	0.18	"	"	430	0.08	560	---
13, 60	0.14	0.18	0.22	"	"	385	0.09	525	---
14, 61	0.17	0.22	0.27	"	"	330	0.10	500	---
15, 62	0.21	0.27	0.33	"	"	300	0.15	400	---
16, 63	0.26	0.33	0.40	"	"	275	0.19	360	---
17, 64	0.32	0.39	0.47	40	"	240	0.25	300	---
18, 65	0.37	0.47	0.57	"	25	210	0.30	280	---
19, 66	0.46	0.56	0.68	"	"	190	0.40	250	---
20, 67	0.54	0.68	0.82	"	"	165	0.60	200	---
21, 68	0.68	0.82	1.00	"	"	155	0.70	180	---
22, 69	0.75	1.00	1.25	"	"	140	0.90	160	---
23, 70	0.90	1.20	1.50	"	"	125	1.1	150	---
24, 71	1.13	1.50	1.87	35	7.9	115	1.3	135	---
25, 72	1.35	1.80	2.25	35	"	105	1.7	120	---
26, 73	1.65	2.20	2.75	35	"	100	2.3	100	---
27, 74	2.02	2.70	3.37	25	"	85	3.0	90	---
28, 75	2.48	3.30	4.12	25	"	75	3.9	80	---
29, 76	2.92	3.90	4.87	25	"	47	3.9	80	---
30, 77	3.52	4.70	5.88	25	"	30	3.9	80	---
31, 78	4.2	5.6	7.0	22	"	24	4.0	75	---
32, 79	5.1	6.8	8.5	"	"	23	4.0	75	---
33, 80	6.1	8.2	10.2	"	"	22	4.5	72	---
34, 81	7.5	10.0	12.5	"	"	21	4.5	72	---
35, 82	9.0	12.0	15.0	"	"	17	5.0	70	---
36, 83	11.2	15.0	18.7	"	2.5	15	6.0	65	---
37, 84	13.5	18.0	22.5	"	"	14	8.0	55	---
38, 85	16.5	22.0	27.5	"	"	13	10.0	50	---
39, 86	20.2	27.0	31.3	"	"	11	11.0	45	---
40, 87	24.7	33.0	41.2	"	"	10	13.0	43	---
41, 88	29.2	39.0	48.8	"	"	9	14.0	42	---
42, 89	35.2	47.0	58.8	"	"	8	15.0	40	---
43, 90	42.0	56.0	70.0	"	"	7	19.0	36	---
44, 91	51.0	68.0	85.0	"	"	6	24.0	32	---
45, 92	62.0	82.0	102.0	25	"	5	31.0	28	5.6
46, 93	75.0	100.0	125.0	25	"	4	40.0	25	5.0
47, 94	90.0	120.0	150.0	25	"	3	50.0	22	4.4

1/ Complete part number shall include code letter for termination material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-C-83446/16, COILS, CHIP, RADIOFREQUENCY, VARIABLE

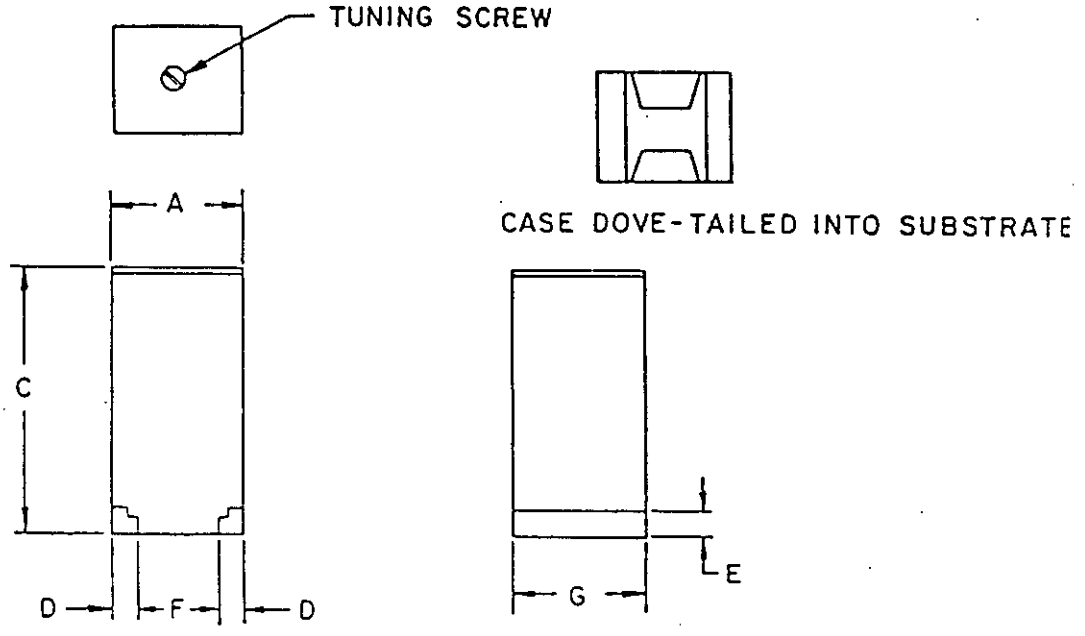

	Inches	mm
A	.160 max	4.06 max
B	.125 max	3.18 max
C	.330 max	8.38 max
D	.020 min	0.51 min
E	.025 ±.005	0.64 ±0.13
F	.090 ±.005	2.29 ±0.13

REQUIREMENTS

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-C-83446/16, COILS, CHIP, RADIOFREQUENCY, VARIABLE


TABLE I. Electrical characteristics (initial).

Part number M83446/16-	Inductance			Q min over L range	Q (typ) (at L Nom)	Test frequency	Self-resonant frequency (min)	DC resistance at 25°C (max)	Current (max)	Incremental current (max)
	Min	Nom	Max							
	µH	µH	µH			MHz	MHz	Ohms	mA	mA
01	0.010	0.013	0.016	50	60	200	1200	0.03	250	
02	0.018	0.022	0.025	50	60	200	1050	0.07	"	
03	0.036	0.044	0.051	40	50	100	740	0.13	"	
04	0.049	0.065	0.076	40	50	100	600	0.20	"	
05	0.071	0.085	0.100	30	40	25	530	0.32	"	
06	0.080	0.105	0.130	"	"	"	525	0.34	200	
07	0.107	0.129	0.150	"	"	"	500	0.35	200	
08	0.120	0.150	0.180	"	"	"	470	0.41	180	
09	0.157	0.189	0.220	"	"	"	400	0.45	180	
10	0.193	0.232	0.270	"	"	"	350	0.50	180	
11	0.236	0.283	0.330	"	"	"	320	0.60	140	
12	0.230	0.300	0.370	"	"	"	275	0.62	140	
13	0.336	0.403	0.470	"	"	"	255	0.65	100	
14	0.400	0.480	0.560	"	"	"	230	0.75	"	
15	0.485	0.583	0.680	"	"	"	190	0.85	"	
16	0.565	0.660	0.760	"	"	"	170	0.88	"	
17	0.586	0.703	0.820	"	"	"	150	0.90	"	
18	0.616	0.783	0.950	"	"	"	145	0.95	"	
19	0.666	0.833	1.00	25	35	"	140	0.98	"	
20	1.00	1.25	1.50	"	"	7.9	110	1.0	"	
21	1.47	1.84	2.20	"	"	"	100	1.4	80	
22	1.80	2.25	2.70	"	"	"	89	1.6	75	
23	2.20	2.75	3.30	"	"	"	77	1.8	65	
24	3.13	3.92	4.70	"	"	"	49	2.2	60	
25	3.87	4.84	5.80	"	"	"	38	2.8	58	
26	4.53	5.67	6.80	"	"	"	36	3.0	55	
27	5.47	6.84	8.20	"	"	"	21	3.0	55	
28	6.00	7.50	10.00	"	"	2.5	20	2.8	55	50
29	6.50	9.75	13.00	"	"	"	19	3.0	53	45
30	8.00	12.00	16.00	25	35	"	16	3.4	50	40
31	10.00	15.00	20.00	"	"	"	14	3.5	43	37
32	11.00	16.50	22.00	"	"	"	12	4.0	43	36
33	15.00	22.50	30.00	"	"	"	11	4.5	40	32
34	18.00	27.00	36.00	"	"	"	10	5.0	40	31
35	23.00	35.00	47.00	"	"	"	6.5	5.7	39	29
36	28.00	42.00	56.00	"	"	"	6.3	7.0	35	28
37	34.00	51.00	68.00	"	"	"	6.2	8.0	30	26
38	37.00	56.00	75.00	"	"	"	5.9	9.0	30	25
39	43.00	65.00	86.00	"	"	"	5.6	10.0	28	23
40	50.00	75.00	100	"	"	"	5.3	12.0	27	20
41	60.00	90.00	120	20	30	0.79	4.4	14.0	25	20
42	75.00	112.5	150	"	"	"	4.0	18.0	22	20
43	235	353	470	"	"	"	2.1	30.0	16	16
44	340	510	680	"	"	"	2.1	35.0	15	15
45	500	750	1000	"	"	"	1.1	75.0	11	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-C-83446/17, COILS, CHIP, RADIOFREQUENCY, VARIABLE

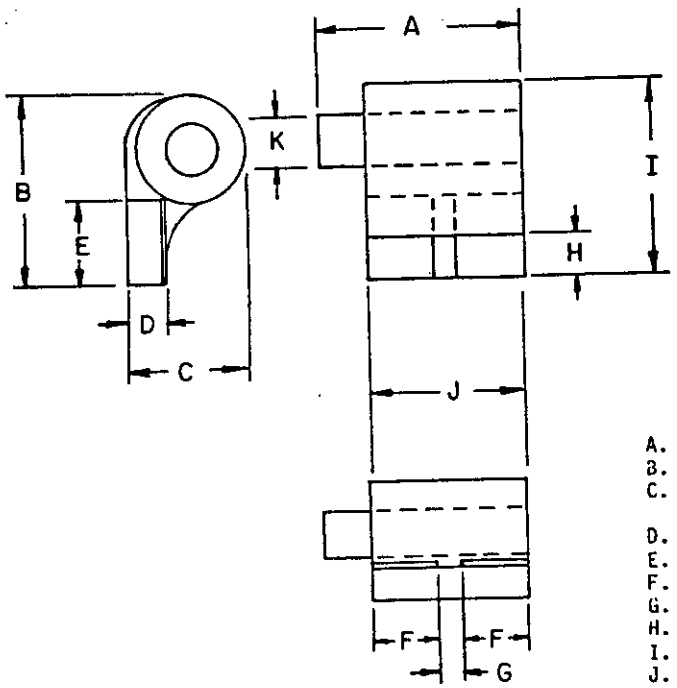

	Inches	mm
A.	.180 max	4.57 max
B.	.140 max	3.56 max
C.	.095 max (-41 thru -45)	2.41 max
	.065 max (-1 thru -40)	1.65 max
D.	.025 ±.005	.64 ±.13
E.	.057 ±.002	1.45 ±.05
F.	.045 ±.005	1.14 ±.13
G.	.005 min	.13 min
H.	.020 min	.51 min
I.	.140 max	3.56 max
J.	.102 ±.003	2.59 ±.03
K.	.033 ±.002 dia	.84 ±.05

REQUIREMENTS

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-C-83446/17, COILS, CHIP, RADIOFREQUENCY, VARIABLE


TABLE I. Electrical characteristics (initial).

Part number M83446/17-	Inductance			Q min over L range	Q (typ) (at L Nom)	Test frequency	Self-resonant frequency (min)	DC resistance at 25°C (max)	Current (max)	Incremental current (max)
	Min	Nom	Max							
	µH	µH	µH			MHz	MHz	Ohms	mA	mA
01	0.010	0.013	0.016	50	60	200	1200	0.03	250	
02	0.018	0.022	0.025	50	60	200	1050	0.07	"	
03	0.036	0.044	0.051	40	50	100	740	0.13	"	
04	0.049	0.065	0.076	40	50	100	600	0.20	"	
05	0.071	0.085	0.100	30	40	25	530	0.32	"	
06	0.080	0.105	0.130	"	"	"	525	0.34	200	
07	0.107	0.129	0.150	"	"	"	500	0.35	200	
08	0.120	0.150	0.180	"	"	"	470	0.41	180	
09	0.157	0.189	0.220	"	"	"	400	0.45	180	
10	0.193	0.232	0.270	"	"	"	350	0.50	180	
11	0.236	0.283	0.330	"	"	"	320	0.60	140	
12	0.230	0.300	0.370	"	"	"	275	0.62	140	
13	0.336	0.403	0.470	"	"	"	255	0.65	100	
14	0.400	0.480	0.560	"	"	"	230	0.75	"	
15	0.485	0.583	0.680	"	"	"	190	0.85	"	
16	0.565	0.660	0.760	"	"	"	170	0.88	"	
17	0.586	0.703	0.820	"	"	"	150	0.90	"	
18	0.616	0.783	0.950	"	"	"	145	0.95	"	
19	0.666	0.833	1.00	25	35	"	140	0.98	"	
20	1.00	1.25	1.50	"	"	7.9	110	1.0	"	
21	1.47	1.84	2.20	"	"	"	100	1.4	80	
22	1.80	2.25	2.70	"	"	"	89	1.6	75	
23	2.20	2.75	3.30	"	"	"	77	1.8	65	
24	3.13	3.92	4.70	"	"	"	49	2.2	60	
25	3.87	4.84	5.80	"	"	"	38	2.8	58	
26	4.53	5.67	6.80	"	"	"	36	3.0	55	
27	5.47	6.84	8.20	"	"	"	21	3.0	55	
28	6.00	7.50	10.00	"	"	2.5	20	2.8	55	50
29	6.50	9.75	13.00	"	"	2.5	19	3.0	53	45
30	8.00	12.00	16.00	25	35	2.5	16	3.4	50	40
31	10.00	15.00	20.00	"	"	"	14	3.5	43	37
32	11.00	16.50	22.00	"	"	"	12	4.0	43	36
33	15.00	22.50	30.00	"	"	"	11	4.5	40	32
34	18.00	27.00	36.00	"	"	"	10	5.0	40	31
35	23.00	35.00	47.00	"	"	"	6.5	5.7	39	29
36	28.00	42.00	56.00	"	"	"	6.3	7.0	35	28
37	34.00	51.00	68.00	"	"	"	6.2	8.0	30	26
38	37.00	56.00	75.00	"	"	"	5.9	9.0	30	25
39	43.00	65.00	86.00	"	"	"	5.6	10.0	28	23
40	50.00	75.00	100	"	"	"	5.3	12.0	27	20
41	60.00	90.00	120	20	30	0.79	4.4	14.0	25	20
42	75.00	112.5	150	"	"	"	4.0	18.0	22	20
43	235	353	470	"	"	"	2.1	30.0	16	16
44	340	510	680	"	"	"	2.1	35.0	15	15
45	500	750	1000	"	"	"	1.1	75.0	11	11

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-C-83446/18, COILS, CHIP, RADIOFREQUENCY, VARIABLE

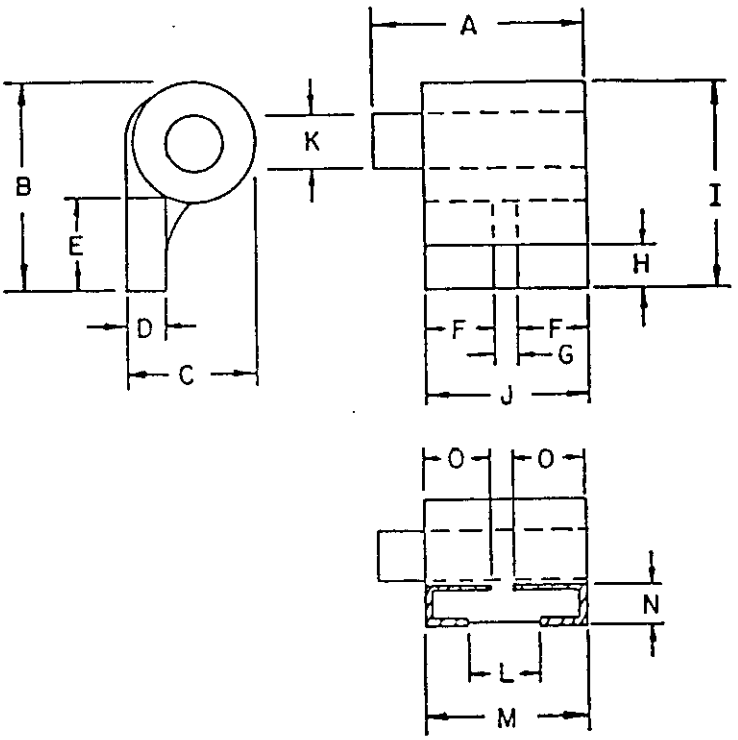

	Inches	mm
A.	.180 max	4.57 max
B.	.140 max	3.56 max
C.	.095 max (-41 thru -45)	2.41 max
	.065 max (-1 thru -40)	1.65 max
D.	.040 ±.010	1.02 ±.25
E.	.045 ±.005	1.14 ±.13
F.	.045 ±.005	1.14 ±.13
G.	.010 ±.002	0.25 ±.05
H.	.010 min	0.25 min
I.	.140 max	3.56 max
J.	.100 ±.005	2.54 ±.13
K.	.033 ±.002 dia	.84 ±.05
L.	.030 ±.005	.76 ±.13
M.	.100 ±.005	2.54 ±.13
N.	.036 ±.005	.89 ±.13
O.	.045 ±.005	1.14 ±.13

REQUIREMENTS

Weight: 0.5 gram maximum.

Operating temperature range: -55°C to +125°C.

Storage temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-C-83446/18, COILS, CHIP, RADIOFREQUENCY, VARIABLE


TABLE I. Electrical characteristics (initial).


Part number M83446/18-	Inductance			Q min over L range	Q (typ) (at L Nom)	Test frequency	Self-resonant frequency (min)	DC resistance at 25°C (max)	Current (max)	Incremental current (max)
	Min	Nom	Max							
	µH	µH	µH			MHz	MHz	Ohms	mA	mA
01	0.010	0.013	0.016	50	60	200	1200	0.03	250	
02	0.018	0.022	0.025	50	60	200	1050	0.07	"	
03	0.036	0.044	0.051	40	50	100	740	0.13	"	
04	0.049	0.065	0.076	40	50	100	600	0.20	"	
05	0.071	0.085	0.100	30	40	25	530	0.32	"	
06	0.080	0.105	0.130	"	"	"	525	0.34	200	
07	0.107	0.129	0.150	"	"	"	500	0.35	200	
08	0.120	0.150	0.180	"	"	"	470	0.41	180	
09	0.157	0.189	0.220	"	"	"	400	0.45	180	
10	0.193	0.232	0.270	"	"	"	350	0.50	180	
11	0.236	0.283	0.330	"	"	"	320	0.60	140	
12	0.230	0.300	0.370	"	"	"	275	0.62	140	
13	0.336	0.403	0.470	"	"	"	255	0.65	100	
14	0.400	0.480	0.560	"	"	"	230	0.75	"	
15	0.485	0.583	0.680	"	"	"	190	0.85	"	
16	0.565	0.660	0.760	"	"	"	170	0.88	"	
17	0.586	0.703	0.820	"	"	"	150	0.90	"	
18	0.616	0.783	0.950	"	"	"	145	0.95	"	
19	0.666	0.833	1.00	25	35	"	140	0.98	"	
20	1.00	1.25	1.50	"	"	7.9	110	1.0	"	
21	1.47	1.84	2.20	"	"	"	100	1.4	80	
22	1.80	2.25	2.70	"	"	"	89	1.6	75	
23	2.20	2.75	3.30	"	"	"	77	1.8	65	
24	3.13	3.92	4.70	"	"	"	49	2.2	60	
25	3.87	4.84	5.80	"	"	"	38	2.8	58	
26	4.53	5.67	6.80	"	"	"	36	3.0	55	
27	5.47	6.84	8.20	"	"	"	21	3.0	55	
28	6.00	7.50	10.00	"	"	2.5	20	2.8	55	50
29	6.50	9.75	13.00	"	"	"	19	3.0	53	45
30	8.00	12.00	16.00	25	35	"	16	3.4	50	40
31	10.00	15.00	20.00	"	"	"	14	3.5	43	37
32	11.00	16.50	22.00	"	"	"	12	4.0	43	36
33	15.00	22.50	30.00	"	"	"	11	4.5	40	32
34	18.00	27.00	36.00	"	"	"	10	5.0	40	31
35	23.00	35.00	47.00	"	"	"	6.5	5.7	39	29
36	28.00	42.00	56.00	"	"	"	6.3	7.0	35	28
37	34.00	51.00	68.00	"	"	"	6.2	8.0	30	26
38	37.00	56.00	75.00	"	"	"	5.9	9.0	30	25
39	43.00	65.00	86.00	"	"	"	5.6	10.0	28	23
40	50.00	75.00	100	"	"	"	5.3	12.0	27	20
41	60.00	90.00	120	20	30	0.79	4.4	14.0	25	20
42	75.00	112.5	150	"	"	"	4.0	18.0	22	20
43	235	353	470	"	"	"	2.1	30.0	16	16
44	340	510	680	"	"	"	2.1	35.0	15	15
45	500	750	1000	"	"	"	1.1	75.0	11	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

SECTION 502

MIL-C-83476/19, COILS, CHIP, RADIOFREQUENCY, VARIABLE

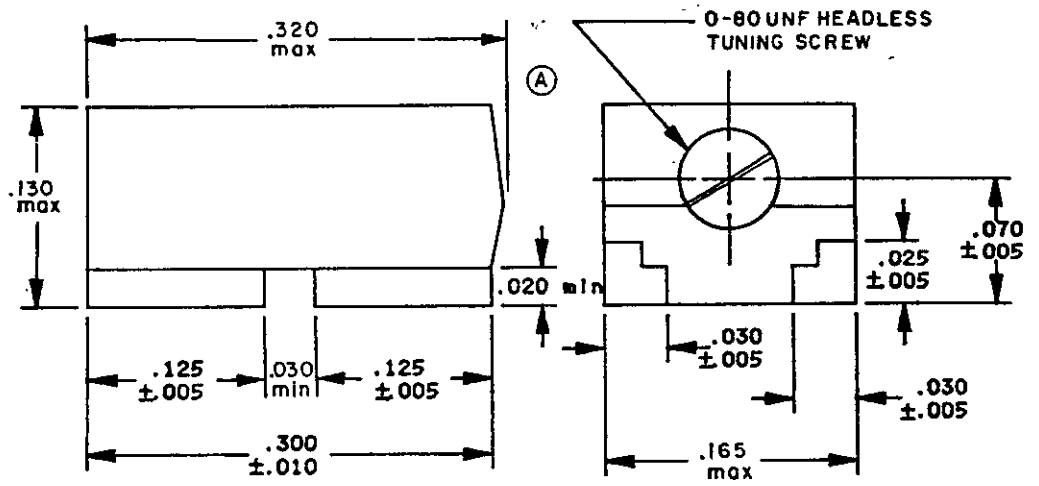

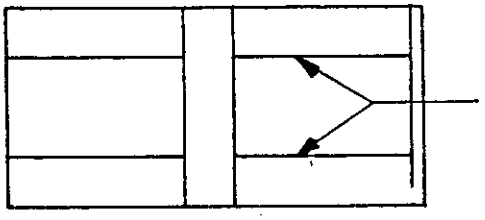

Inches	mm
.005	0.13
.010	0.25
.020	0.51
.025	0.64
.030	0.76
.070	1.78
.130	3.30
.165	4.19
.300	7.62
.320	8.13

REQUIREMENTS:

Weight: 0.5 gram maximum.

Turning torque: .05 ounce - inches minimum, .50 ounce - inches maximum.

Operating temperature range: -55°C to +125°C.

Temperature rise (at 90°C): 35°C.

Maximum operating temperature: 125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 700 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.

MIL-C-83446/19, COILS, CHIP, RADIOFREQUENCY, VARIABLE

TABLE I. Electrical characteristics (initial).

Part number M83446/19-	Inductance			Q min over L range	Q (typ) (at L Nom)	Test frequency	Self-resonant frequency (min)	DC resistance at 25°C (max)	Current (max)	Incremental current (max)
	Min	Nom	Max							
	µH	µH	µH			MHz	MHz	Ohms	mA	mA
01	0.010	0.013	0.016	50	60	200	1200	0.03	250	
02	0.018	0.022	0.025	50	60	200	1050	0.07	"	
03	0.036	0.044	0.051	40	50	100	740	0.13	"	
04	0.049	0.065	0.076	40	50	100	600	0.20	"	
05	0.071	0.085	0.100	30	40	25	530	0.32	"	
06	0.080	0.105	0.130	"	"	"	525	0.34	200	
07	0.107	0.129	0.150	"	"	"	500	0.35	200	
08	0.120	0.150	0.180	"	"	"	470	0.41	180	
09	0.157	0.189	0.220	"	"	"	400	0.45	180	
10	0.193	0.232	0.270	"	"	"	350	0.50	180	
11	0.236	0.283	0.330	"	"	"	320	0.60	140	
12	0.243	0.300	0.370	"	"	"	275	0.62	140	
13	0.336	0.403	0.470	"	"	"	255	0.65	100	
14	0.400	0.480	0.560	"	"	"	230	0.75	"	
15	0.485	0.583	0.680	"	"	"	190	0.85	"	
16	0.565	0.660	0.760	"	"	"	170	0.88	"	
17	0.586	0.703	0.820	"	"	"	150	0.90	"	
18	0.616	0.783	0.950	"	"	"	145	0.95	"	
19	0.666	0.833	1.00	25	35	"	140	0.98	"	
20	1.00	1.25	1.50	"	"	7.9	110	1.0	"	
21	1.47	1.84	2.20	"	"	"	100	1.4	80	
22	1.80	2.25	2.70	"	"	"	89	1.6	75	
23	2.20	2.75	3.30	"	"	"	77	1.8	65	
24	3.13	3.92	4.70	"	"	"	49	2.2	60	
25	3.87	4.84	5.80	"	"	"	38	2.8	58	
26	4.53	5.67	6.80	"	"	"	36	3.0	55	
27	5.47	6.84	8.20	"	"	"	21	3.0	55	
28	6.00	7.50	10.00	"	"	2.5	20	2.8	55	50
29	6.50	9.75	13.00	"	"	"	19	3.0	53	45
30	8.00	12.00	16.00	25	35	"	16	3.4	50	40
31	10.00	15.00	20.00	"	"	"	14	3.5	43	37
32	11.00	16.50	22.00	"	"	"	12	4.0	43	36
33	15.00	22.50	30.00	"	"	"	11	4.5	40	32
34	18.00	27.00	36.00	"	"	"	10	5.0	40	31
35	23.00	35.00	47.00	"	"	"	6.5	5.7	39	29
36	28.00	42.00	56.00	"	"	"	6.3	7.0	35	28
37	34.00	51.00	68.00	"	"	"	6.2	8.0	30	26
38	37.00	56.00	75.00	"	"	"	5.9	9.0	30	25
39	43.00	65.00	86.00	"	"	"	5.6	10.0	28	23
40	50.00	75.00	100	"	"	"	5.3	12.0	27	20
41	60.00	90.00	120	20	30	0.79	4.4	14.0	25	20
42	75.00	112.5	150	"	"	"	4.0	18.0	22	20
43	235	353	470	"	"	"	2.1	30.0	16	16
44	340	510	680	"	"	"	2.1	35.0	15	15
45	500	750	1000	"	"	"	1.1	75.0	11	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:43Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, CG, MC

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0676)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:43Z
Check the source to verify that this is the current version before use.