MILITARY STANDARD

MIL-STD-1320-211
(NAVY)


TRUCKLOADING


2 MAY 1984

WARHEAD SECTION FOR MISSILE, AGM-88A (HARM) IN CNU-353/E CONTAINER

CONTAINER DATA

LENGTH	42.6 IN.
WIDTH	18.5 IN.
HEIGHT	23.6 IN.
STACKING HEIGHT	22.7 IN.
GROSS WEIGHT	286 LBS.
TARE WEIGHT	140 LBS.
CUBE	10.8 CU. FT.
DRAWING NO.	DL 808146-50
DOT HAZARD CLASSIFICATION	

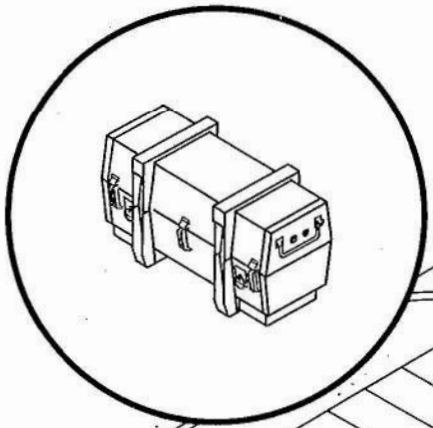

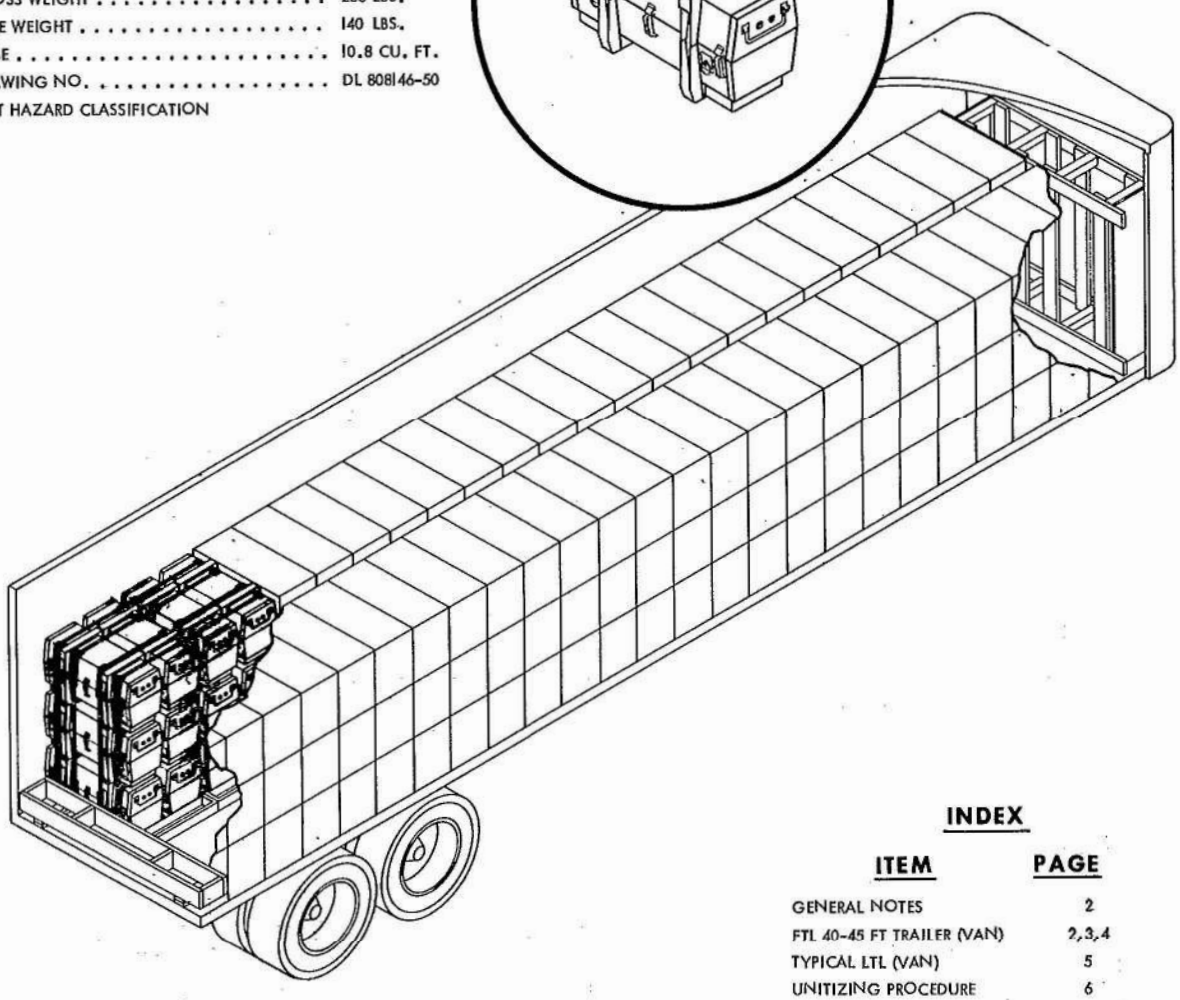

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40-45 FT TRAILER (VAN)	2,3,4
TYPICAL LTL (VAN)	5
UNITIZING PROCEDURE	6

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINER LOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

M.S. Gray NWHC 4/24/84
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly 4/26/84
SIGNATURE AIRSYSCOM BY DATE

ORIGINATOR Charles McBride 5/2/84
NAVAL WEAPONS HANDLING CENTER DATE
MONMOUTH, NEW JERSEY

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:44Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT PROVIDES DETAILED INSTRUCTIONS FOR TRUCKLOADING AGM 88/A WARHEADS IN THE CONTAINER CNU-353/E.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40, 42, 44 AND 45 FT VAN TRAILERS WITH NAILABLE OR NON-NAILABLE FLOORS. ALL TRAILERS SHALL HAVE THEIR TANDEM AXLES LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER).
3. THE CONTAINERS, WHEN STACKED THREE HIGH, SHALL BE STRAPPED TOGETHER IN UNITS OF SIX AS SHOWN ON PAGE 5. IF REQUIRED BY THE LENGTH OF THE TRAILER, THREE CONTAINERS MAY BE STACKED AND STRAPPED TOGETHER. DO NOT PLACE THIS UNIT OF THREE AT THE REAR OF THE LOAD. IT SHALL BE LOCATED A MINIMUM OF TWO UNITS OF SIX FORWARD OF THE REAR LOADS.
4. THE REAR BLOCKING ASSEMBLY, DETAIL B, SHALL FILL THE VOID BETWEEN THE LADING AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED.

WARNING

DO NOT USE TRAILERS WITH ROLL UP DOORS WHEN BLOCKING BY THIS METHOD.

5. FILLER ASSEMBLY, DETAIL C, IS INSTALLED AFTER EACH STACK OF TWO UNIT LOADS IS IN PLACE. THE UNIT LOADS ARE PLACED TO BEAR AGAINST THE VAN WALLS WHILE THE FILLER IS PLACED IN THE MIDDLE OF THE VAN FLOOR BETWEEN THE TWO LOADS. FILLER AND BLOCKING ASSEMBLIES CAN BE USED ON EITHER A NAILABLE OR A NON-NAILABLE FLOOR TRAILER.
6. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
7. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA AND CLOSE THE SEAL TRAILER DOORS.
8. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

FTL 40, 42, 44 & 45 FT TRAILERS (VAN)

1. A FULL TRUCKLOAD FOR A 40-FT TRAILER IS 144 CONTAINERS AND IS SHOWN ON PAGE 3. A FULL TRUCKLOAD FOR OTHER LENGTH TRAILERS IS: (SEE TABLE I)


TABLE I

TRAILER LENGTH	FTL-MAX NO. OF CONTAINERS	OK FOR 32,000 LBS AXLE LIMIT STATES		OK FOR 34,000 LBS AXLE LIMIT STATES		LOAD WEIGHT PLUS DUNNAGE	FRONT BULKHEAD STYLE
		STD.WT. EQUIP.	LT.WT. EQUIP.	STD WT. EQUIP.	LT.WT. EQUIP.		
40 FT	144	YES	YES	YES	YES	41,580	C_2
42 FT	150	YES	YES	YES	YES	43,300	C_2
44 FT	162	NO	NO	YES	YES	46,730	C_1
45 FT	162	NO	NO	YES	YES	46,780	C_2
45 FT	168	NO	NO	NO	YES	48,500	C

BLOCKS AND BRACES ALL TRAILERS USING THE PRINCIPLES SHOWN ON PAGE 3. SEE GENERAL NOTE 3.


2. THE AFT END OF EACH OF THE TWO STACKS SHALL BE SECURED BY STRAPPING TOGETHER TWO UNIT LOADS OF SIX CONTAINERS TO FORM A UNITIZED LOAD OF 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:44Z
Check the source to verify that this is the current version before use.

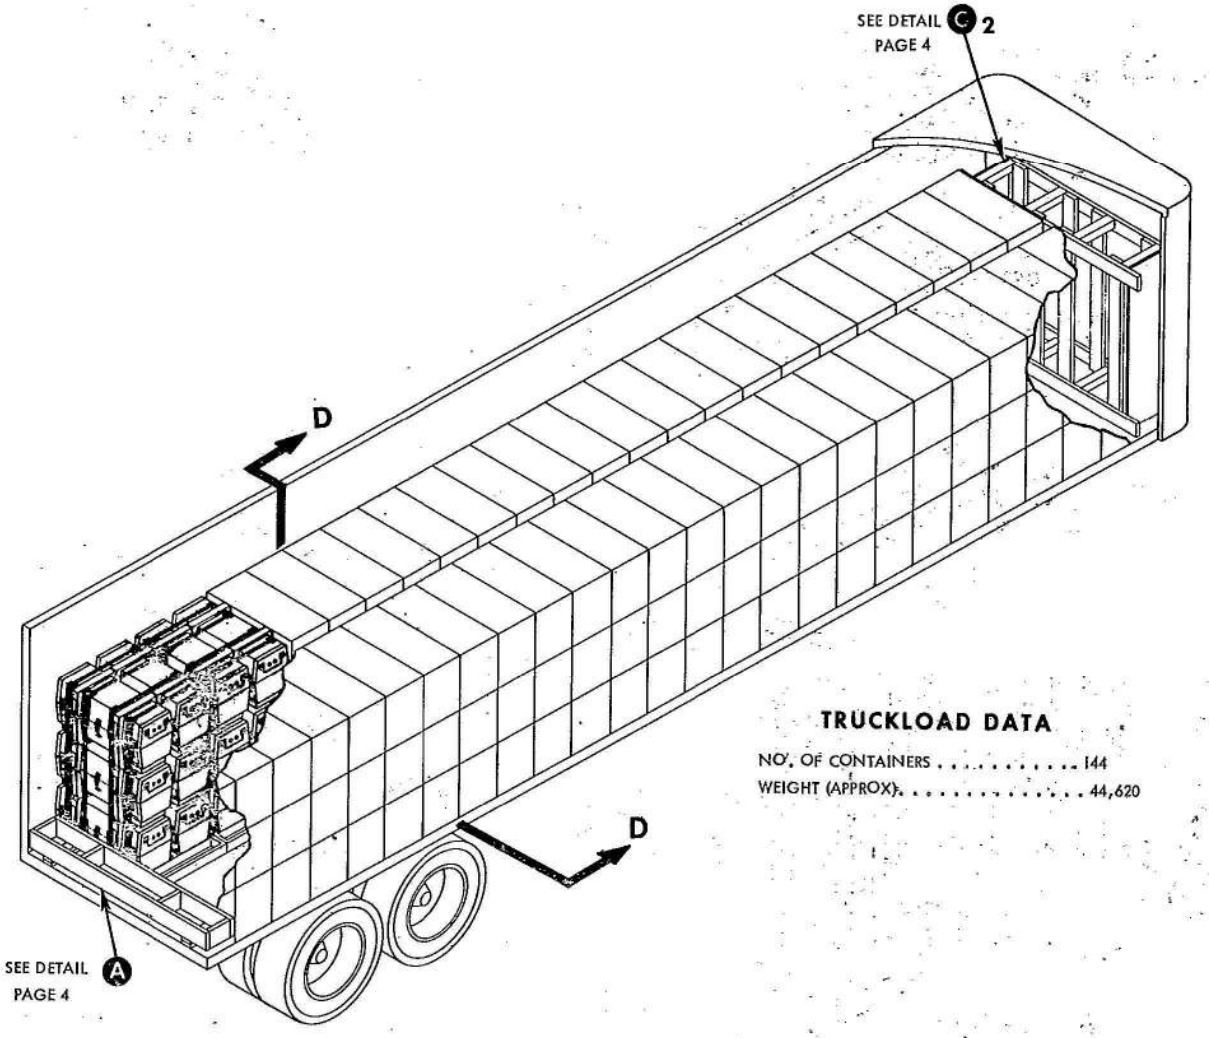

TRUCKLOAD DATA


NO. OF CONTAINERS 144
WEIGHT (APPROX). 44,620

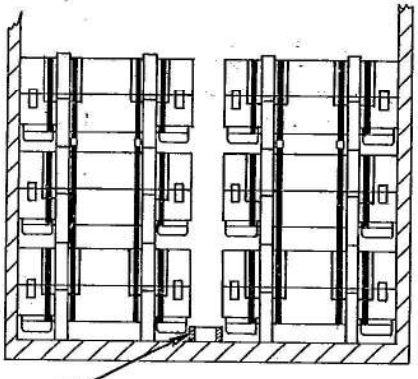


SECTION D-D

NOTE: SEE PAGE 5 FOR UNITIZATION DETAILS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:44Z
Check the source to verify that this is the current version before use.

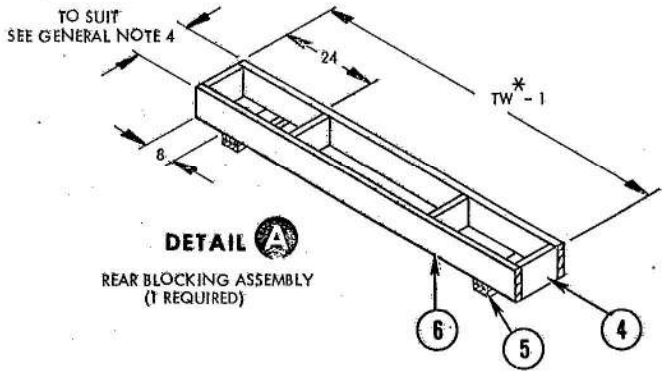


DETAIL A
REAR BLOCKING ASSEMBLY
(1 REQUIRED)

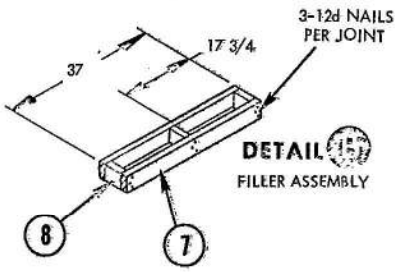

DETAIL B
FILLER ASSEMBLY

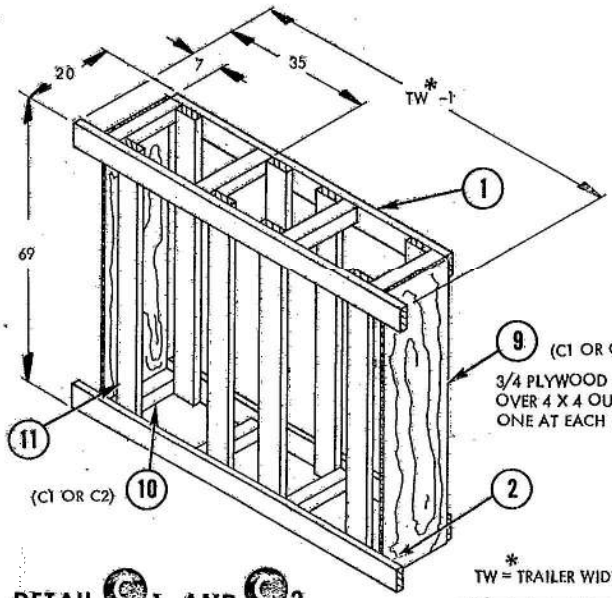

DETAIL C1 AND C2
FRONT BULKHEAD

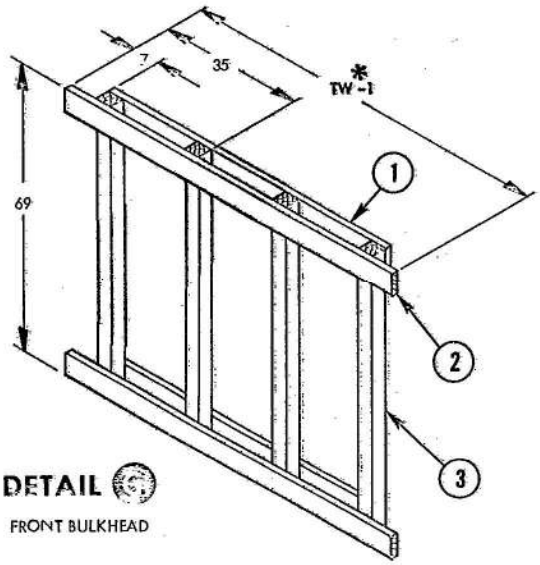

DETAIL C
FRONT BULKHEAD

*TW = TRAILER WIDTH

NOTE:
USE DETAIL C_2 FOR 40, 42, AND 45 FT TRAILERS.
USE DETAIL C FOR 45 FT TRAILER WITH T68 CONTAINERS
AND USE DETAIL C_1 FOR 44 FT TRAILERS.

ITEM NO.	DESCRIPTION	SIZE	NO. OF ITEMS REQ'D	NAIL TO	NUMBER NAILS	SIZE
11	VERTICAL	2 X 6 X 69	8	SEE 1 & 2	-	-
10(C2)	GUSSET	3/4 X 17 X 69	2	9	6/JOINT	10d
10(C1)	GUSSET	3/4 X 12 X 69	2	9	4/JOINT	10d
9(C2)	HORIZONTAL SPACER	4 X 4 X 17	8	1 & 2	3/JOINT	20d
9(C1)	HORIZONTAL SPACER	4 X 4 X 12	8	1 & 2	3/JOINT	20d
8	FILLER SPACER	2 X 4 X 4 1/2	72	SEE 7	-	-
7	FILLER STRUT	2 X 4 X 37	48	8	3/JOINT	12d
6	HORIZONTAL	2 X 8 X TW*-1	2	4	4/JOINT	16d
5	SUPPORT	2 X 4 X TO SUIT	4	6	2/JOINT	10d
				4	3/PIECE	10d
4	STRUT	2 X 8 X TO SUIT	4	SEE 6	-	-
3	VERTICAL	4 X 4 X 69	4	SEE 1 & 2	-	-
2	AFT CROSSMEMBER	2 X 6 X TW*-1	2	3	3	10d
1	FWD CROSSMEMBER	2 X 6 X TO SUIT	2	3	3	10d

LIST OF MATERIALS & NAILING DATA


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:44Z
Check the source to verify that this is the current version before use.

LTL ALL LENGTH TRAILERS (VAN)


1. WHEN REQUIRED TO SHIP LESS THAN TRUCKLOAD, BUT MORE THAN 96 CONTAINERS, DECREASE THE NUMBER OF CONTAINERS BY USING UNITIZED LOADS OF 4 FORWARD OF THE AFT TWO UNIT LOADS. IF SHIPPING LESS THAN 96 BUT MORE THAN 48 CONTAINERS, DECREASE THE NUMBER OF CONTAINERS BY USING UNITIZED LOADS OF 2 AND SO ON. WHEN SHIPPING FEWER THAN 48 CONTAINERS, BLOCK AND BRACE AS SHOWN BELOW.

WARNING

DO NOT USE TRAILERS WITH NON-NAILABLE FLOORS WHEN BLOCKING BY THIS METHOD. TRAILERS MUST HAVE NAILABLE FLOORS.

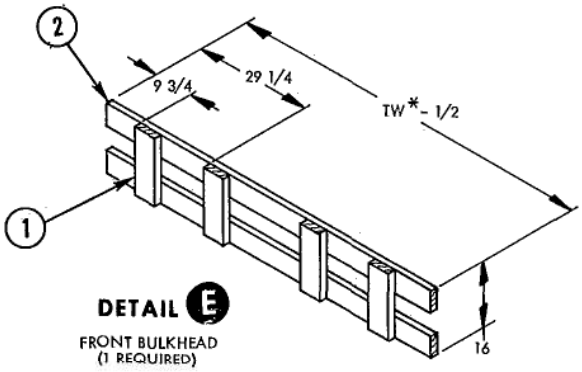

DETAIL E
FRONT BULKHEAD
(1 REQUIRED)

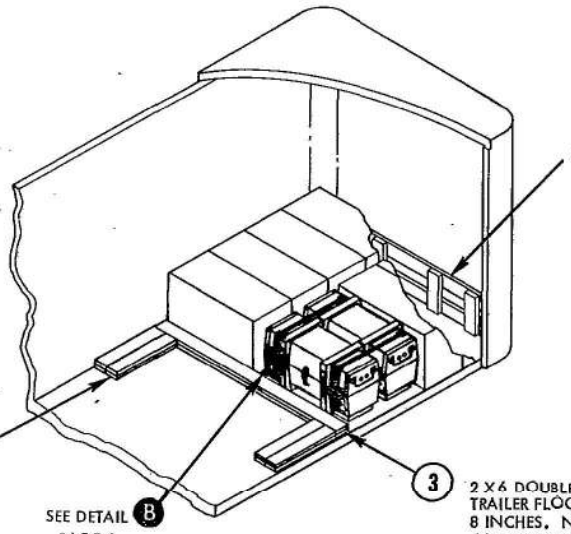

2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

TW = TRAILER WIDTH

ITEM NO.	DESCRIPTION	SIZE	NO. OF ITEMS REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
4	BACKUP CLEAT	2 X 6 X 30	8	SEE FIELD NOTE		
3	CROSSMEMBER	2 X 6 X 76 7/8	2	SEE FIELD NOTE		
2	HORIZONTAL	2 X 6 X TW* - 1/2	2	SEE 1	-	-
1	VERTICAL	2 X 6 X 16	4	2	4/JOINT	10d


LIST OF MATERIALS & NAILING DATA

TYPICAL LTL (VAN)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:44Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

1. PUT STRAP, ITEM 1, AROUND CONTAINERS, TENSION AND DOUBLE NOTCH SEAL.
2. STACK THREE CONTAINERS, THEN PLACE TWO STACKS SIDE BY SIDE, SO THAT MOISTURE INDICATORS ARE ON SAME ENDS.
3. PUT UNIT LOAD STRAP, ITEM 2, AROUND UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL.

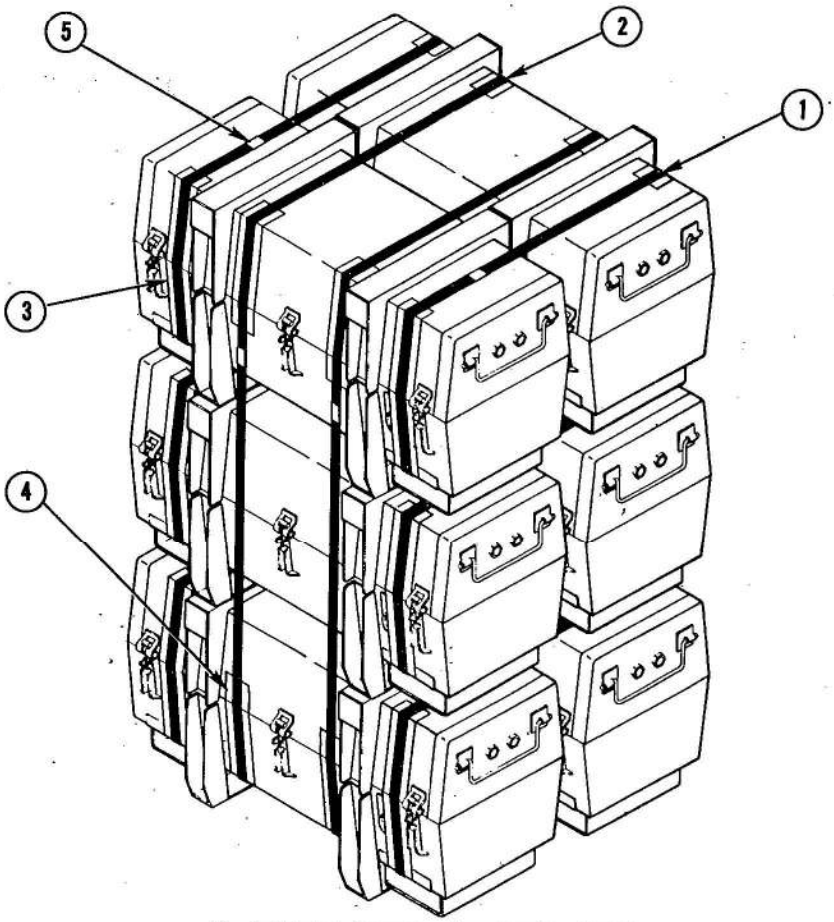

ITEM NO.	DESCRIPTION	SIZE	NO. OF ITEMS REQ'D	NAIL TO	NUMBER NAILS	SIZE NAILS
5	SEAL	3/4	8	-	-	
4	CHAFING MAT	15 X 3	8	-	-	-
3	CHAFING MAT	24 X 3	12	-	-	-
2	STRAPPING (UNIT LOAD)	3/4 X .035 X 18 FT	2	-	-	-
1	STRAPPING	3/4 X .035 X 10 FT	6	-	-	-

LIST OF MATERIALS & NAILING DATA

PREPARING ACTIVITY:
NAVY - OS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 2030-N287)

Source: https://assist.dla.mil -- Downloaded: 2026-01-28T07:44Z
Check the source to verify that this is the current version before use.