MILITARY SPECIFICATION SHEET


(B)

SWITCH, RADIO FREQUENCY TRANSMISSION LINE (COAXIAL) (ELECTRICALLY OPERATED) CLASS 7

INACTIVE FOR NEW DESIGN AFTER 6 SEPTEMBER 1966.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-S-3928.

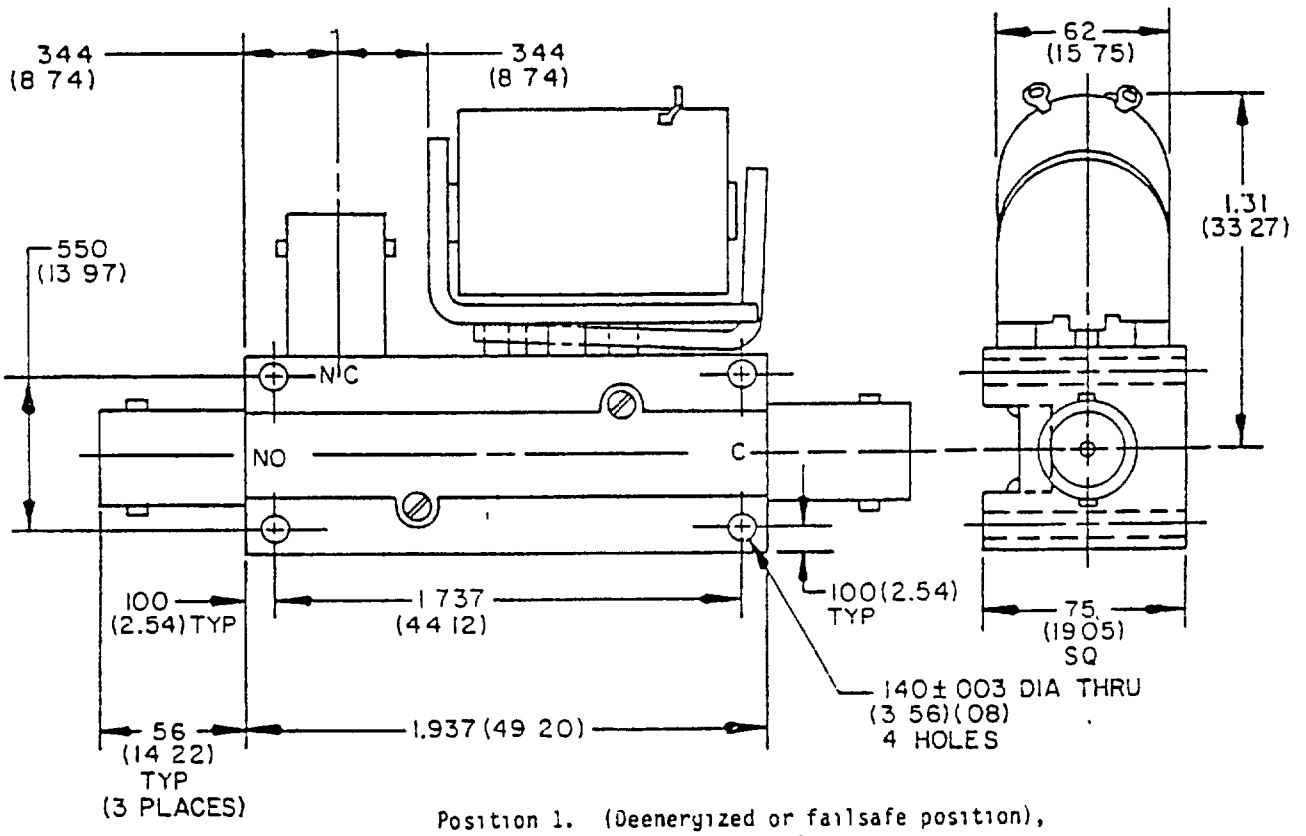

Position 1. (Deenergized or failsafe position), C connects to NC connector.

Position 2. (Energized position), C connects to NO connector.

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Corners of case may be round or square.
5. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ±.03 (0.8 mm) for two place decimals.

FIGURE 1. Part number M3928/11-01.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:17Z
Check the source to verify that this is the current version before use.

(8) TABLE I Electrical and performance characteristics

Dash no. (M3928/11)	Figure no	Housing	Manual or remote	Solenoid or motor	Fail-safe or latching	Frequency range DC to GHz	VSWR (max)	Insertion loss (max)	Isolation (min)	Switching time (max)	Position indicating circuit	Life cycles x 1000	Operating voltage nominal	Pickup voltage (max)	Dropout voltage (min)	Operating current (max) 1/	Holding current fail-safe type 1/ (max)	Power and indicator connector	Weight (max) 2/
								(dB)	(dB)	(ms)						(A)	(A)		(oz)
-01 N	1	D	R	S	F	0 4	1.5 1	0 35	40	10	None	250 3/	28 V dc 4/	18 V dc	14 V dc	0 3	0 3	Solder terminals	12 (341)

1/ At nominal operating voltage and 20°C.

2/ Grams in parentheses.

3/ 25,000 cycles under 25 watts RF power, the remainder with no load

4/ Pulsating dc, 120 Hz ripple (full wave rectified 60 Hz ac)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1.

RF connectors. Female connectors shall mate with type BNC connectors per MIL-C-39012/16.

Nominal impedance. 50 ohms.

Termination Open

RF power handling capability (average): 100 watts.

Electrical and performance characteristics. See table I.

Vibration: Method I.

Operating temperature: -55°C to +85°C.

Part number: M3928/11-01N.

TABLE II. Part number to type cross-reference.

Part number M3928/11-	Type SA- /U
01	1501

Substitutability: Switches covered by this specification sheet are substitutable for the manufacturer's or original equipment manufacturer's (OEM) part numbers specified in table III. This information in no way implies that the manufacturer's or OEM part number or NSN is suitable as a substitute for the military part number.

TABLE III. Substitution data.

Part number M3928/11-	OEM or manufacturer's code	OEM or manufacturer's part number	NSN 5985-
01	14933	C64171	00-813-1935
01	74868	300-11399	00-813-1935
01	13499	410-0252-00	00-813-1935

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 99
DLA - ES

User activities.
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1016-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:17Z
Check the source to verify that this is the current version before use.