INCH-POUND


MIL-DTL-3928/15E
5 July 2001
SUPERSEDING
MIL-S-3928/15D
15 July 1988

DETAIL SPECIFICATION SHEET

SWITCHES, RADIO FREQUENCY TRANSMISSION LINE (COAXIAL) (ELECTRICALLY OPERATED) (OPTIONAL VENTING FOR SPACE APPLICATIONS) CLASS 5, 1P2T

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switch described herein shall consist of this specification and MIL-PRF-3928.

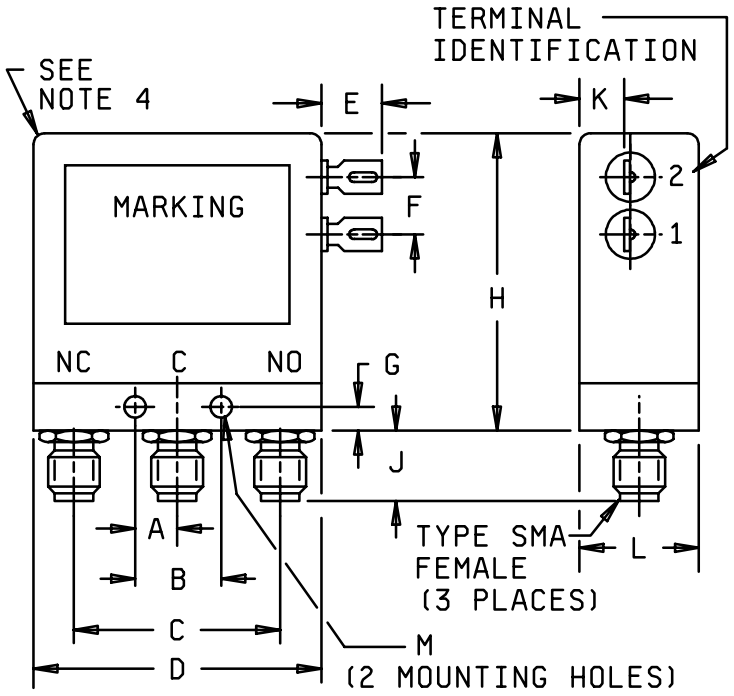


Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	.230	.210	5.84	5.33	G	.103	.083	2.62	2.11
B	.450	.430	11.43	10.92	H	1.2	---	30.5	---
C	.890	.870	22.61	22.10	J	.35	---	8.9	---
D	1.5	---	38.1	---	K	.23	.17	5.8	4.3
E	.35	---	8.9	---	L	.570	---	14.5	---
F	.28	.22	7.1	5.6	M	.130 dia	.110 dia	3.30 dia	2.79 dia

FIGURE 1. Switch configuration and schematic, PINs M3928/15-01, M3928/15-02, and M3928/15-12.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

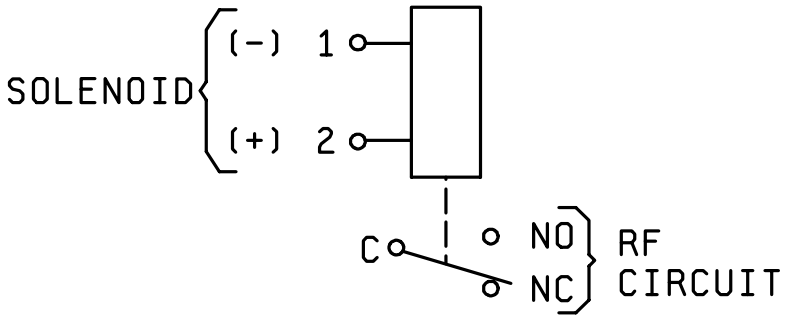


Position 1. (Deenergized or failsafe position),
C connects to NC connector.
NO is open circuit.
Position 2. (Engerized position),
C connects to NO connector,
NC is open circuit.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 1. Switch configuration and schematic, PINs M3928/15-01, M3928/15-02, and M3928/15-12 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

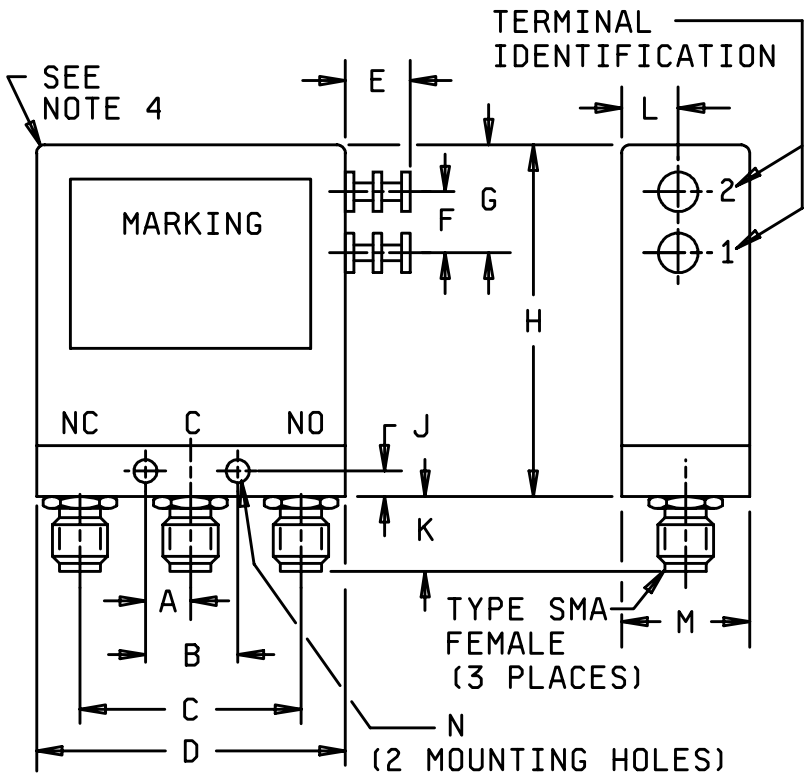

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	.230	.210	5.84	5.33	H	1.2	---	30	---
B	.450	.430	11.43	10.92	J	.103	.083	2.59	2.11
C	.890	.870	22.61	22.10	K	.35	---	8.9	---
D	1.5	---	38	---	L	.160	.140	4.06	3.56
E	.35	---	8.9	---	M	.570	---	14.5	---
F	.23	.17	5.8	4.3	N	.126 dia	.106 dia	3.20 dia	2.69 dia
G	.56	---	14.2	---					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 1A. Alternate construction for PINs M3928/15-01, M3928/15-02, and M3928/15-12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.


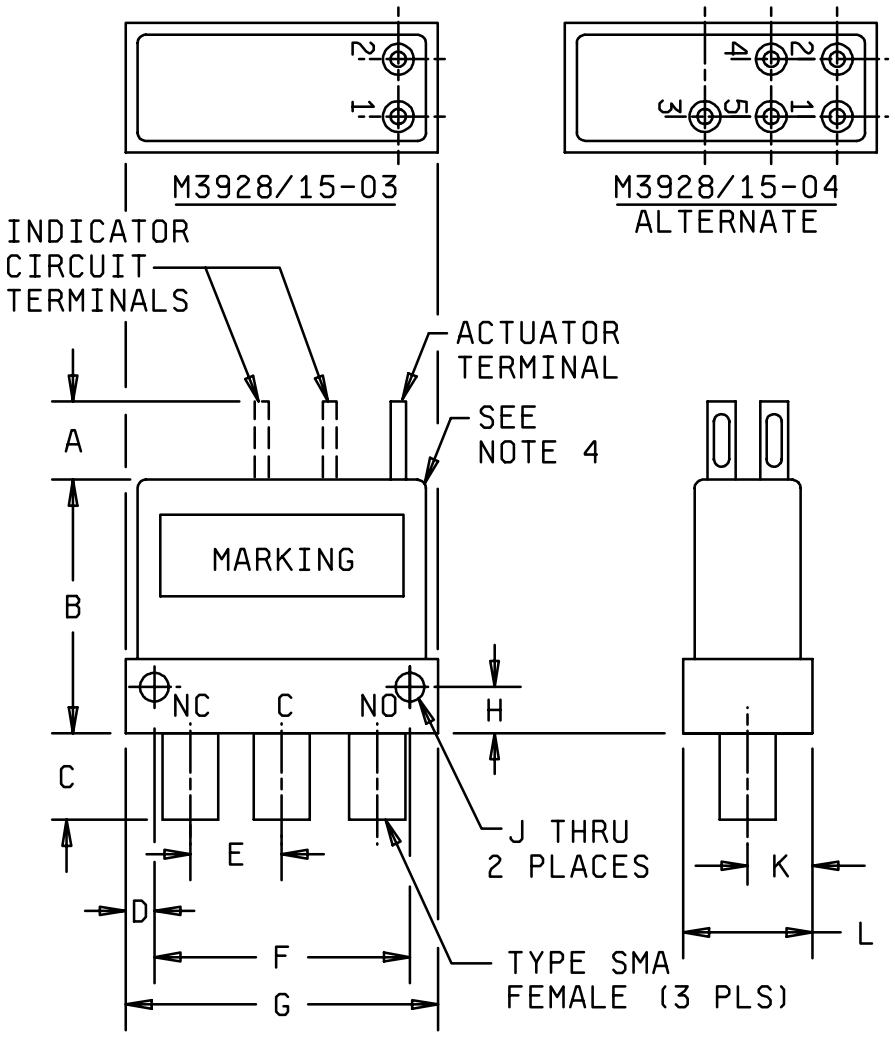


FIGURE 2. Switch configuration and schematic, PINs M3928/15-03 and M3928/15-04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

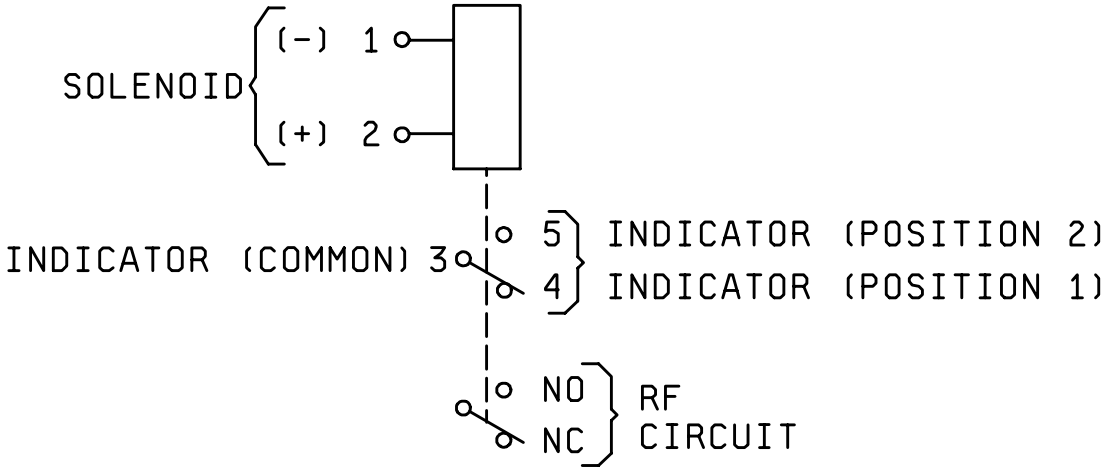

(PIN M3928/15-03 does not have indicator circuit provisions and, therefore, does not have terminals 2, 4 and 5.)

Position 1. (De-energized or failsafe position),
C connects to NC connector,
NO is open circuit

Position 2. (Energized position),
C connects to NO connector,
NC is open circuit

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	.35	---	8.9	---	G	1.37	1.31	34.8	33.3
B	1.18	---	30.0	---	H	.20	.14	5.1	3.6
C	.34	.28	8.6	7.1	J	.103 dia	.083 dia	2.6 dia	2.1 dia
D	.11	.05	2.8	1.3	K	.28	.22	7.1	5.6
E	.47	.41	11.9	10.4	L	.53	.47	13.5	11.9
F	1.22	1.16	31.0	29.5					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 2. Switch configuration and schematic, PINs M3928/15-03 and M3928/15-04 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.


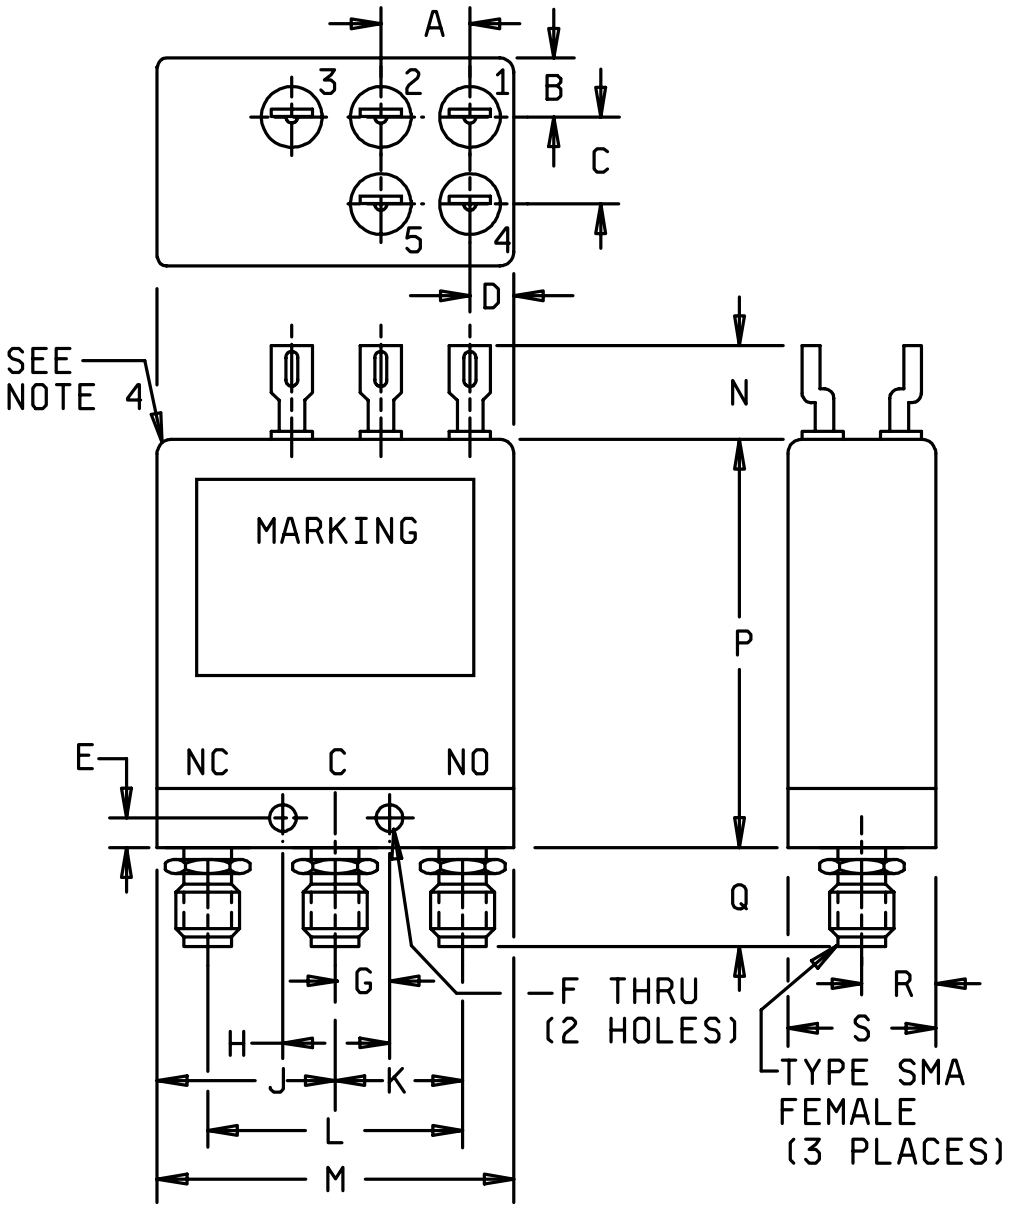


FIGURE 3. Switch configuration and schematic, PIN M3928/15-05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

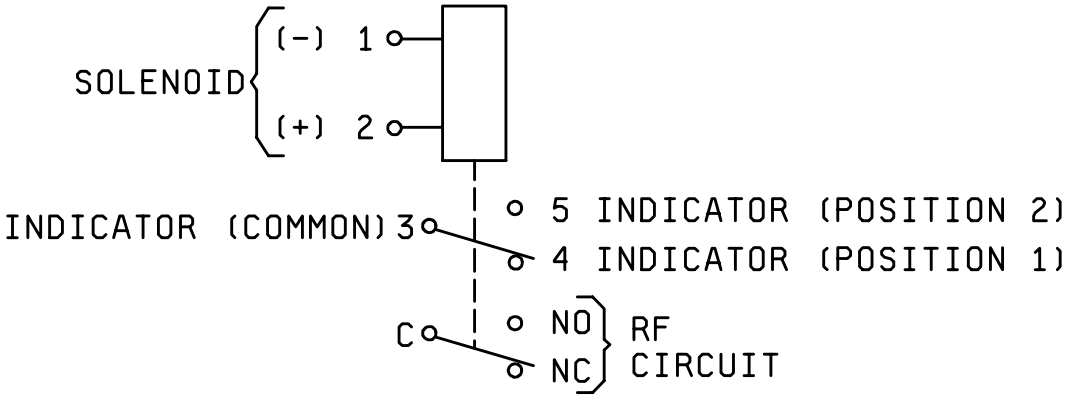

Position 1. (De-energized or failsafe position),
C connects to NC connector.
NO is open circuit

Position 2. (Energized position).
C connects to NO connector.
NC is open circuit

SCHEMATIC (SHOWN IN POSITION 1)

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	.28	.22	7.1	5.6	K	.450	.430	11.4	10.9
B	.20	.14	5.1	3.6	L	.890	.870	22.6	22.1
C	.20	.14	5.1	3.6	M	1.43	1.37	36.3	34.8
D	.29	.23	7.4	5.8	N	.35	---	8.9	---
E	.095	---	2.41	---	P	1.67	1.61	42.4	40.9
F	.130 dia	.110 dia	3.30 dia	2.79 dia	Q	.31	---	7.9	---
G	.230	.210	5.84	5.33	R	.31	.25	7.9	6.4
H	.450	.430	11.4	10.9	S	.59	.53	15.0	13.5
J	.73	.67	18.5	17.0					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 3. Switch configuration and schematic, PIN M3928/15-05 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.


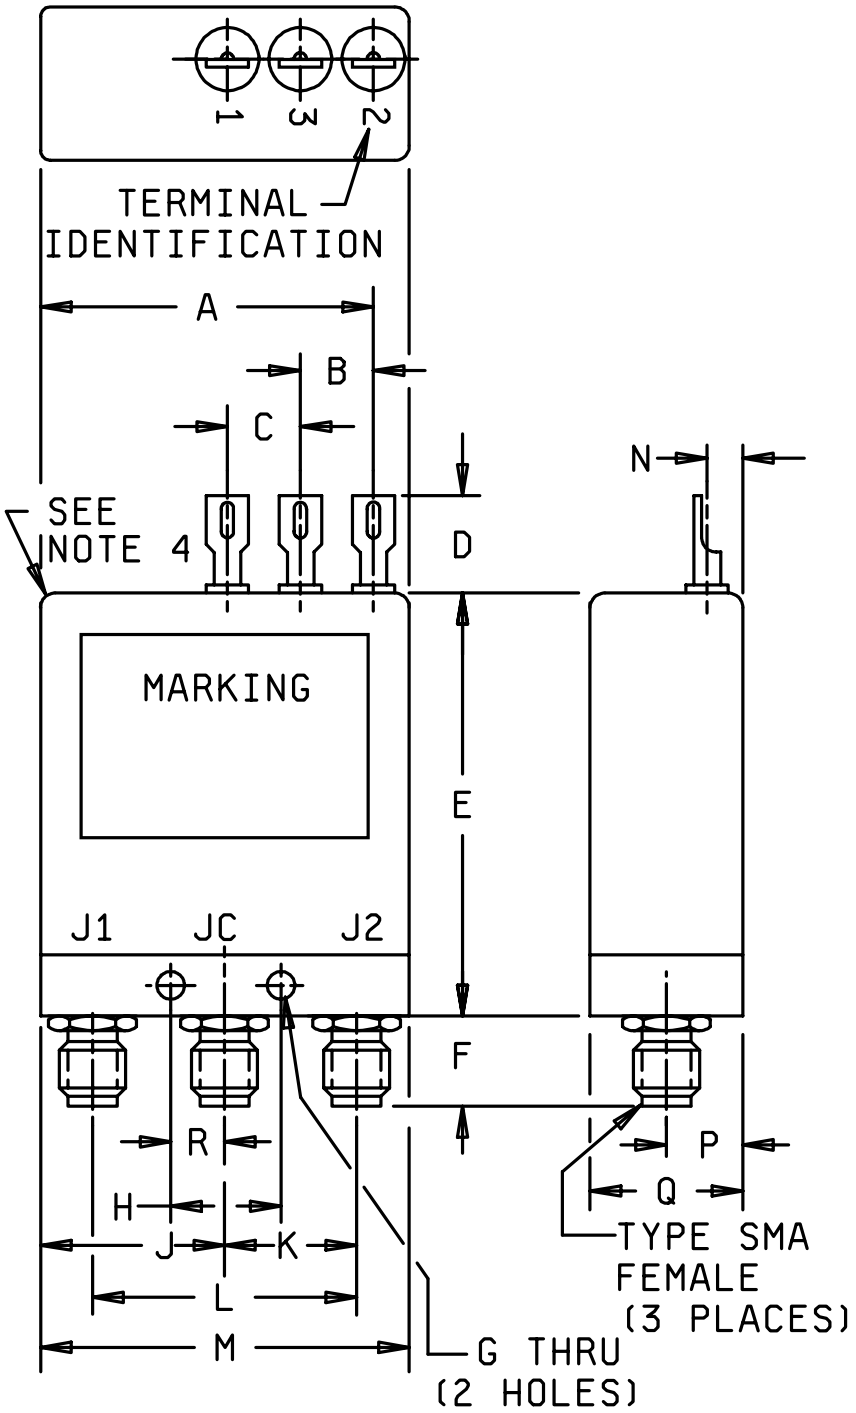


FIGURE 4. Switch configuration and schematic, PIN M3928/15-07.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

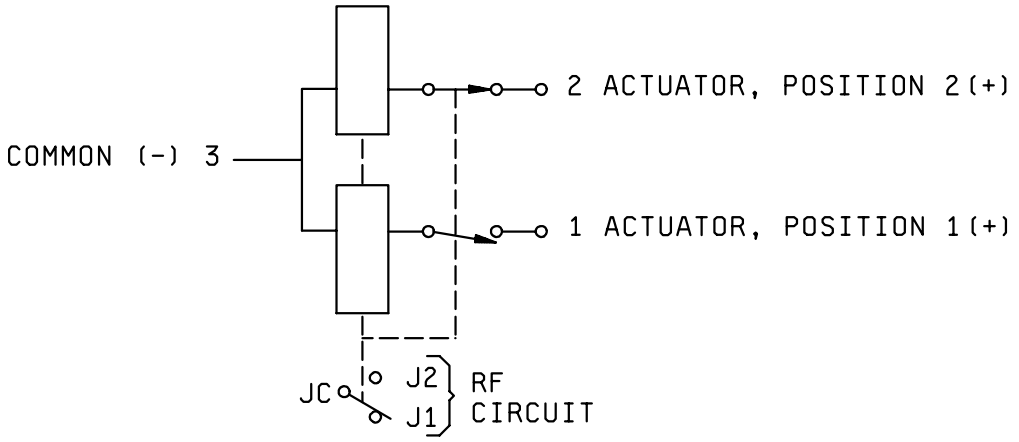

POSITION 1. Energize terminal 1. JC connects to J1, J2 is open circuit.

POSITION 2. Energize terminal 2. JC connects to J2, J1 is open circuit.

SCHEMATIC (shown in position 1)

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	1.15	1.09	29.2	27.7	J	.680	.660	17.27	16.76
B	.28	.22	7.1	5.6	K	.450	.430	11.4	10.9
C	.28	.22	7.1	5.6	L	.890	.870	22.6	22.1
D	.35	---	8.9	---	M	1.37	1.31	34.8	33.3
E	1.50	---	38.1	---	N	.19	.13	4.8	3.3
F	.31	----	7.9	---	P	.28	.22	7.1	5.6
G	.130 dia	.110 dia	3.30 dia	2.79 dia	Q	.53	.47	13.5	11.9
H	.450	.430	11.4	10.9	R	.230	.210	5.84	5.33

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 4. Switch configuration and schematic, PIN M3928/15-07 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.


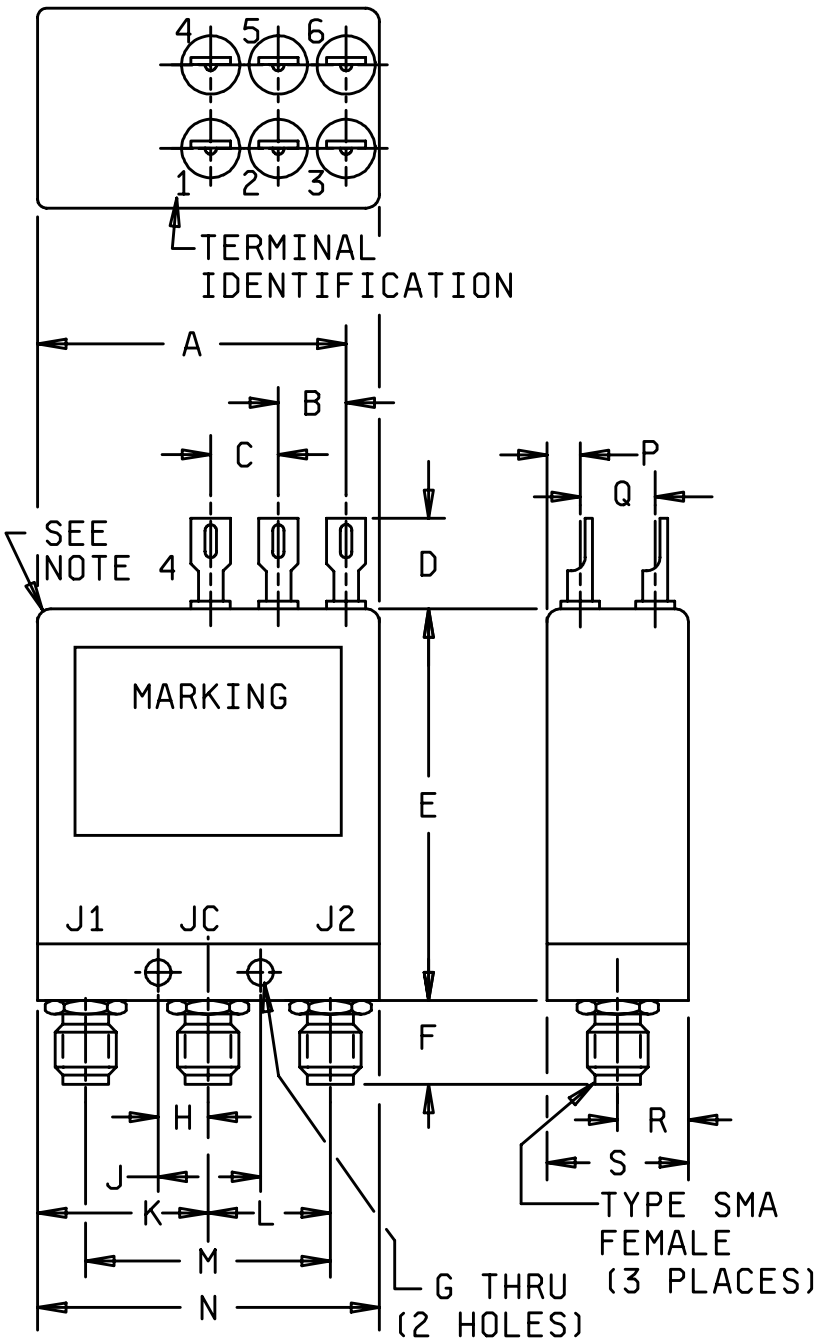


FIGURE 5. Switch configuration and schematic, PIN M3928/15-08.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

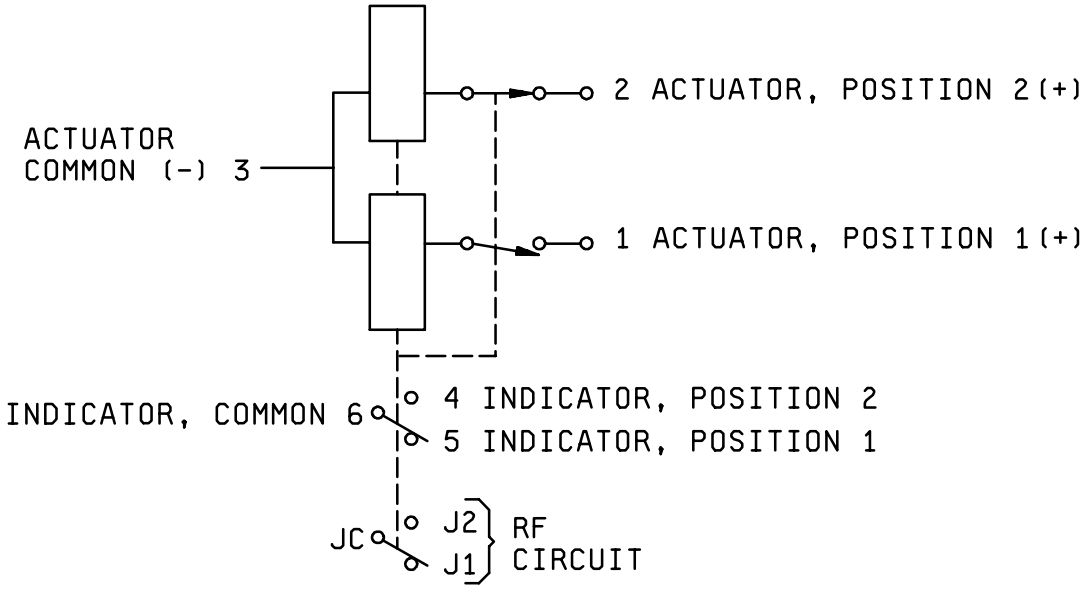

POSITION 1. Energize terminal 1. JC connects to J1, J2 is open circuit.

POSITION 2. Energize terminal 2. JC connects to J2, J1 is open circuit.


SCHEMATIC (shown in position 1)

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	1.15	1.09	29.2	27.7	K	.680	.660	17.27	16.76
B	.28	.22	7.1	5.6	L	.450	.430	11.4	10.9
C	.28	.22	7.1	5.6	M	.890	.870	22.6	22.1
D	.35	---	8.9	---	N	1.37	1.31	34.8	33.3
E	1.50	---	38.1	---	P	.19	.13	4.8	3.3
F	.31	---	7.9	---	Q	.20	.14	5.1	3.6
G	.130 dia	.110 dia	3.30 dia	2.79 dia	R	.28	.22	7.1	5.6
H	.230	.210	5.84	5.33	S	.53	.47	13.5	11.9
J	.450	.430	11.4	10.9					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 5. Switch configuration and schematic, PIN M3928/15-08 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

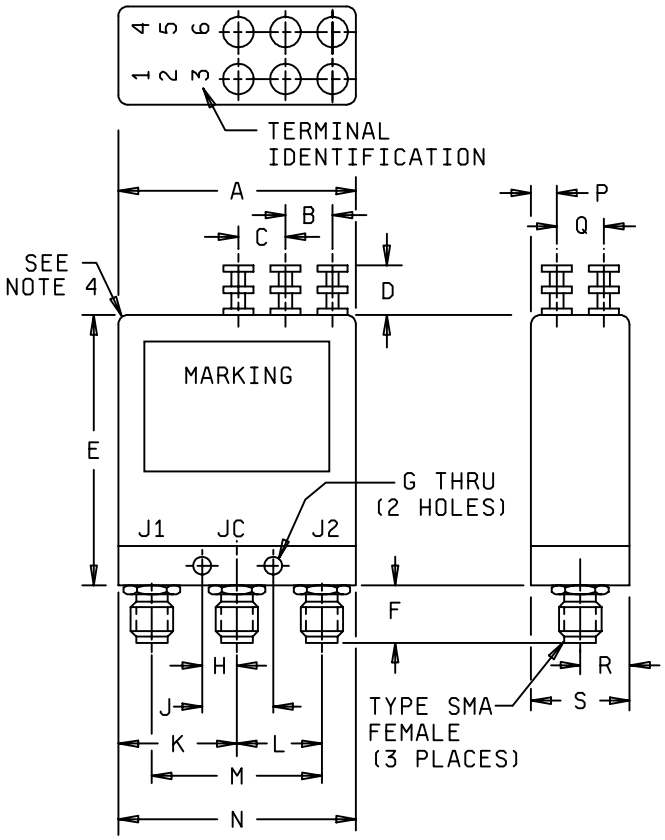

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	1.06	1.00	26.9	25.4	K	.630	.610	16.00	15.49
B	.28	.22	7.1	5.6	L	.450	.430	11.4	10.9
C	.28	.22	7.1	5.6	M	.890	.870	22.6	22.1
D	.35	---	8.9	---	N	1.28	1.22	32.5	31.0
E	1.50	---	38.1	---	P	.19	.13	4.8	3.3
F	.31	---	7.9	---	Q	.20	.14	5.1	3.6
G	.126 dia	.106 dia	3.20 dia	2.69 dia	R	.28	.22	7.1	5.6
H	.230	.210	5.84	5.33	S	.53	.47	13.5	11.9
J	.450	.430	11.4	10.9					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 5A. Alternate construction for PIN M3928/15-08.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.


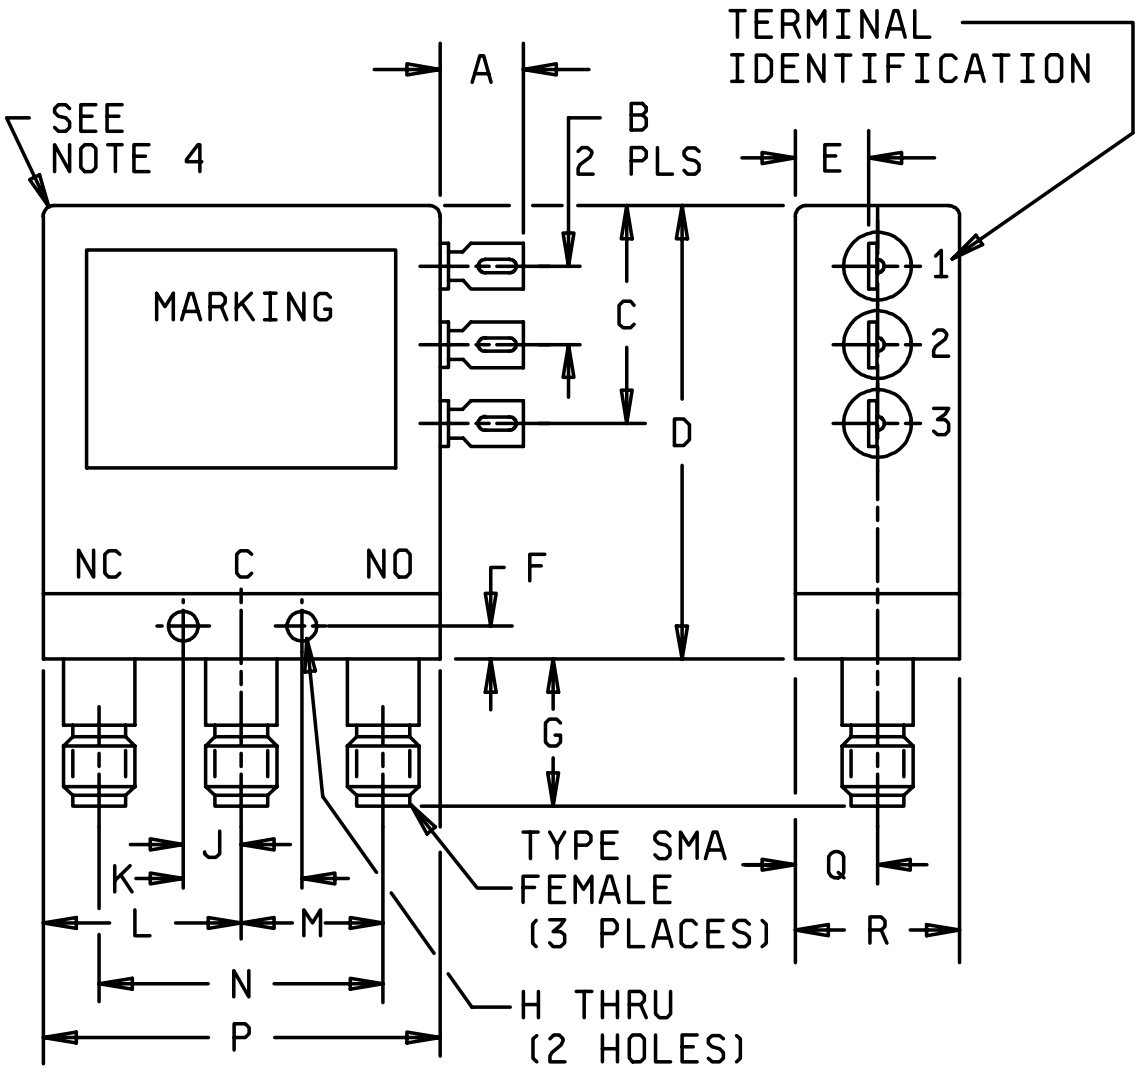


FIGURE 6. Switch configuration and schematic, PIN M3928/15-09.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

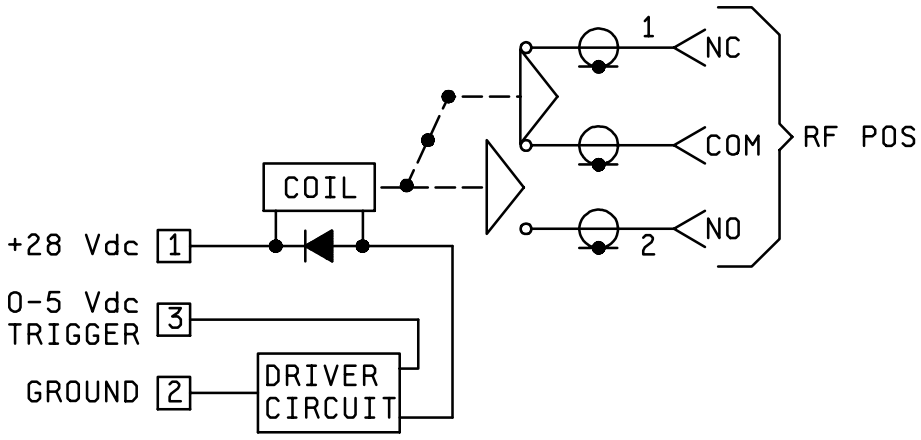

Shown in failsafe position (Position 1).

Energize to connect COM to NO (Position 2).

SCHEMATIC

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	.23	.17	5.8	4.3	J	.230	.210	5.84	5.33
B	.22	.16	5.6	4.1	K	.450	.430	11.4	10.9
C	.66	.60	16.8	15.2	L	.680	.660	17.27	16.76
D	1.38	1.32	35.1	33.5	M	.450	.430	11.4	10.9
E	.19	.13	4.8	3.3	N	.890	.870	22.6	22.1
F	.103	.083	2.62	2.11	P	1.37	1.31	34.80	33.27
G	.50	---	12.7	---	Q	.28	.22	7.1	5.6
H	.130 dia	.110 dia	3.30 dia	2.79 dia	R	.53	.47	13.5	11.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 6. Switch configuration and schematic, PIN M3928/15-09 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.


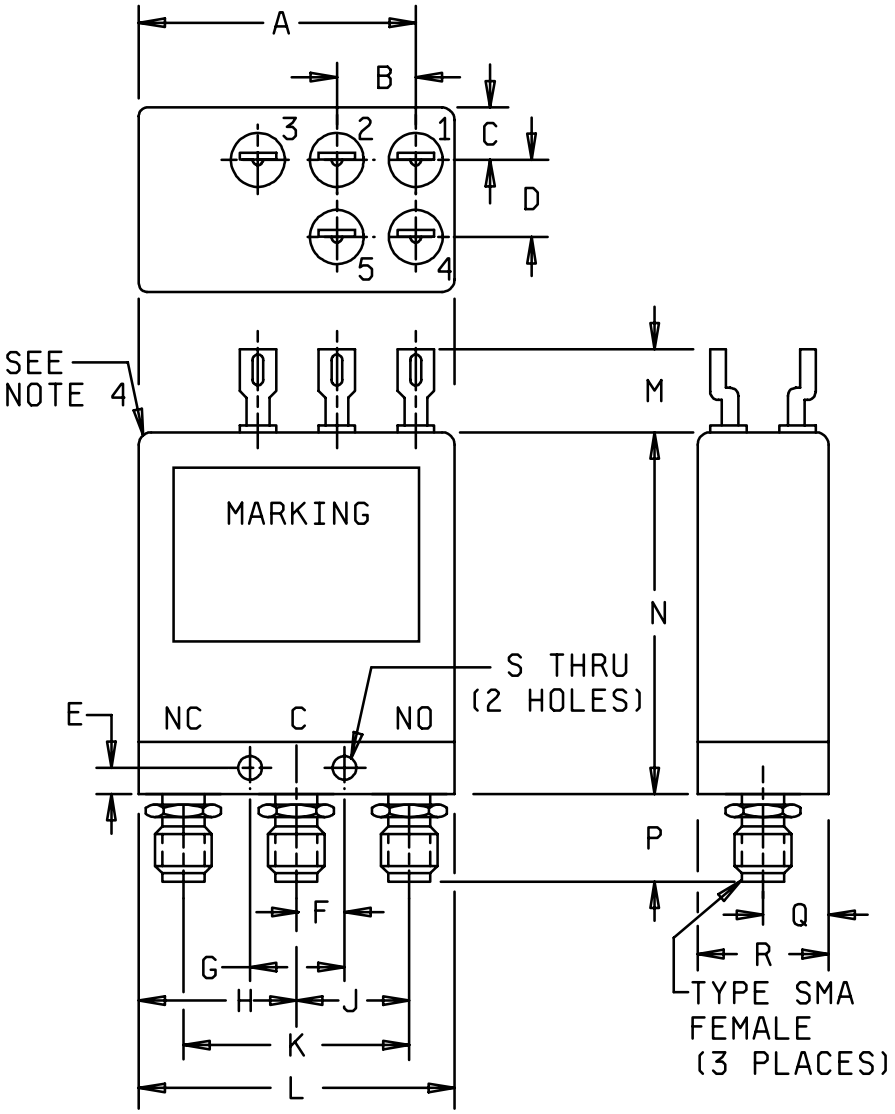


FIGURE 7. Switch configuration and schematic, PINs M3928/15-10 and M3928/15-13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

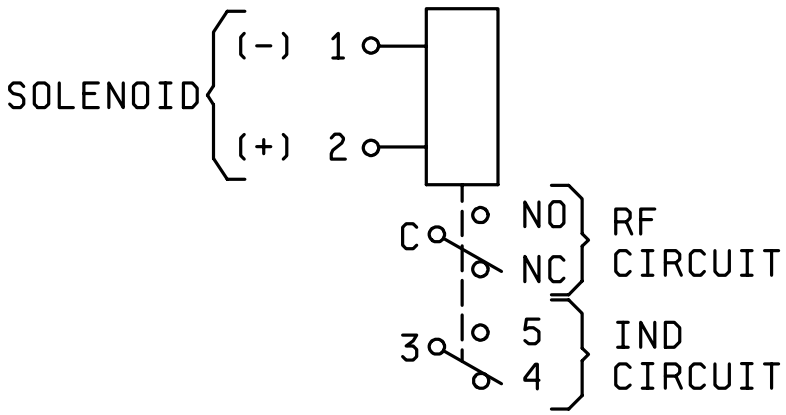

Position 1. (De-energized or failsafe position),
C connects to NC connector.
NO is open circuit


Position 2. (Energized position).
C connects to NO connector.
NC is open circuit


Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	1.15	1.09	29.2	27.7	J	.450	.430	11.4	10.9
B	.28	.22	7.1	5.6	K	.890	.870	22.6	22.1
C	.19	.13	4.8	3.3	L	1.37	1.31	34.80	33.27
D	.20	.14	5.1	3.6	M	.35	---	8.9	---
E	.103	.083	2.62	2.11	N	1.43	1.37	36.3	34.8
F	.230	.210	5.84	5.33	P	.31	---	7.9	---
G	.450	.430	11.4	10.9	Q	.28	.22	7.1	5.6
H	.680	.660	17.27	16.76	R	.53	.47	13.5	11.9

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 7. Switch configuration and schematic, PINs M3928/15-10 and M3928/15-13 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

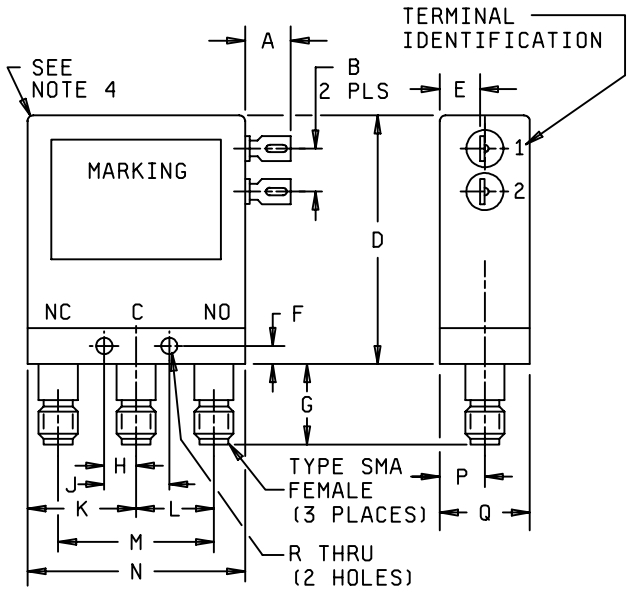

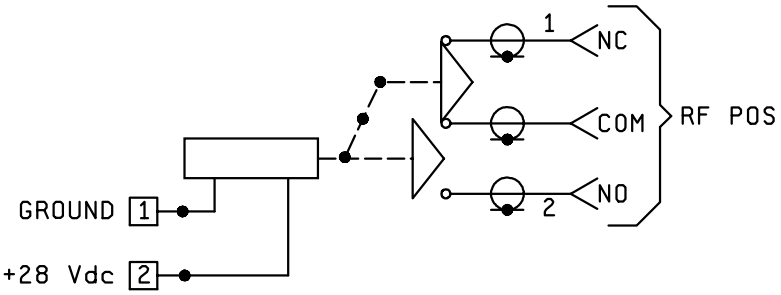

Shown in fail-safe position (position 1). Energize to connect COM to NO (position 2).

SCHEMATIC

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	.35	---	8.9	---	J	.450	.430	11.4	10.9
B	.28	.22	7.1	5.6	K	.680	.660	17.27	16.76
C	.53	.47	13.5	11.9	L	.450	.430	11.4	10.9
D	1.18	1.12	30.0	28.4	M	.890	.870	22.6	22.1
E	.23	.17	5.8	5.3	N	1.37	1.31	34.8	33.3
F	.103	.083	2.62	2.11	P	.28	.22	7.1	5.6
G	.50	---	12.7	---	Q	.57	---	14.5	---
H	.230	.210	5.84	5.33					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 8. Switch configuration and schematic, PIN M3928/15-11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.


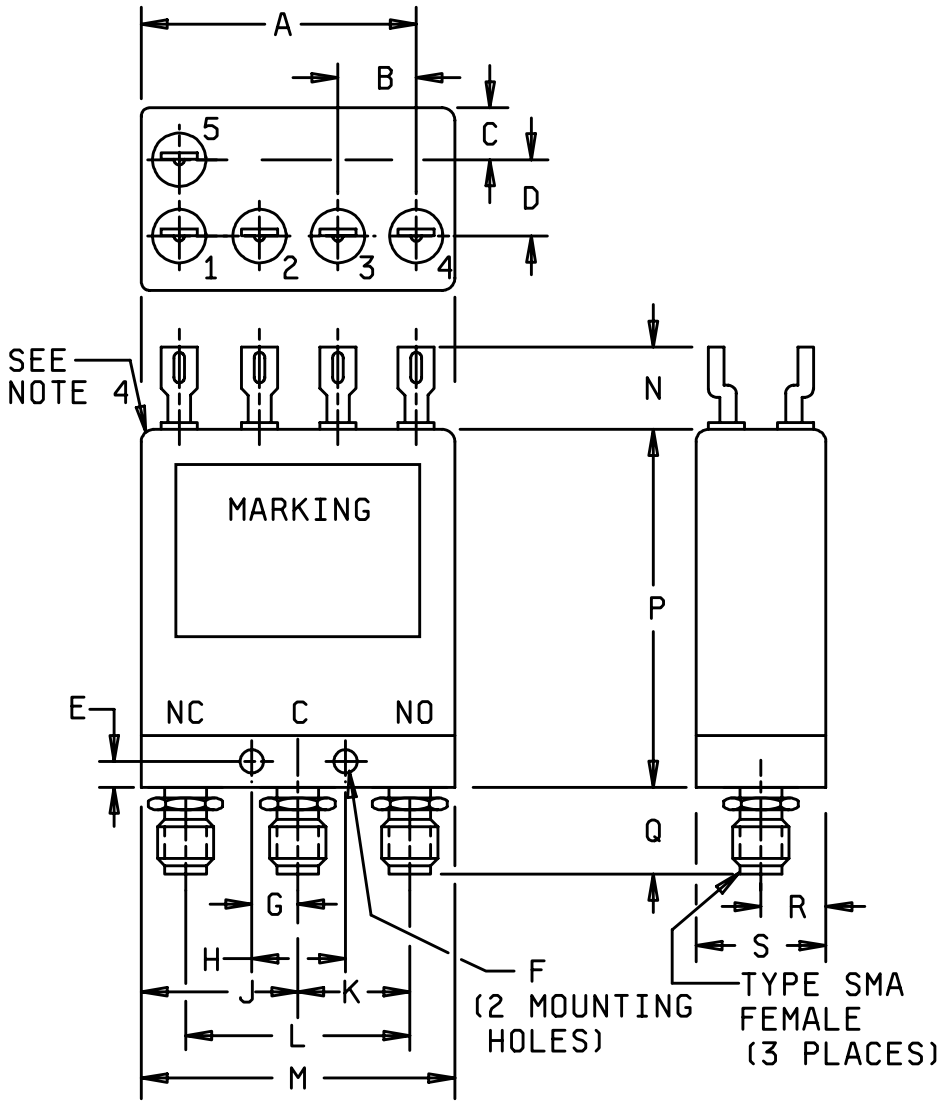


FIGURE 9. Switch configuration and schematic, PIN M3928/15-14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

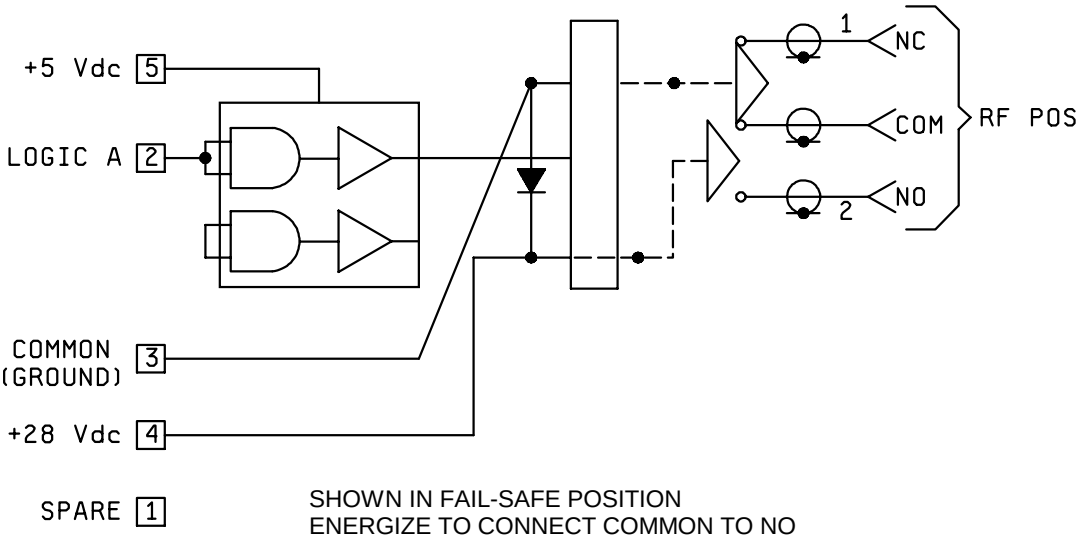

SHOWN IN FAIL-SAFE POSITION
ENERGIZE TO CONNECT COMMON TO NO

SCHEMATIC

Logic truth table	
RF path	Logic signal
	A
C-NC	0
C-NO	1

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	1.15	1.09	29.2	27.7	K	.450	.430	11.4	10.9
B	.28	.22	7.1	5.6	L	.890	.870	22.6	22.1
C	.19	.13	4.8	3.3	M	1.37	1.31	34.8	33.3
D	.20	.14	5.1	3.6	N	.35	---	8.9	---
E	.12	.06	3.0	1.5	P	1.80	---	45.7	---
F	.130 dia	.110 dia	3.30 dia	2.79 dia	Q	.34	.28	8.6	7.1
G	.230	.210	5.84	5.33	R	.28	.22	7.1	5.6
H	.450	.430	11.4	10.9	S	.53	.47	13.5	11.9
J	.680	.660	17.27	16.76					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 9. Switch configuration and schematic, PIN M3928/15-14 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.


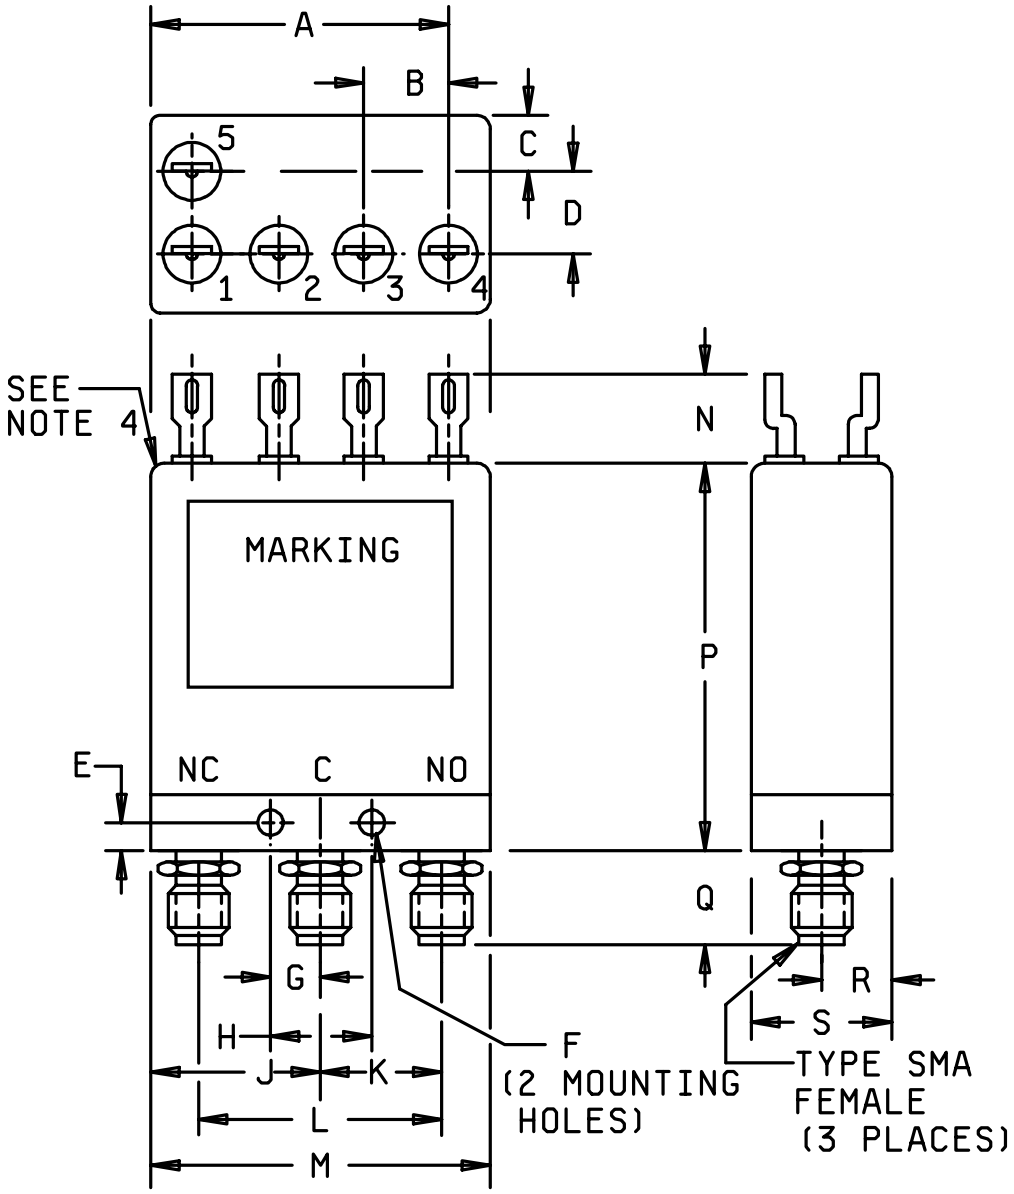


FIGURE 10. Switch configuration and schematic, PIN M3928/15-15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

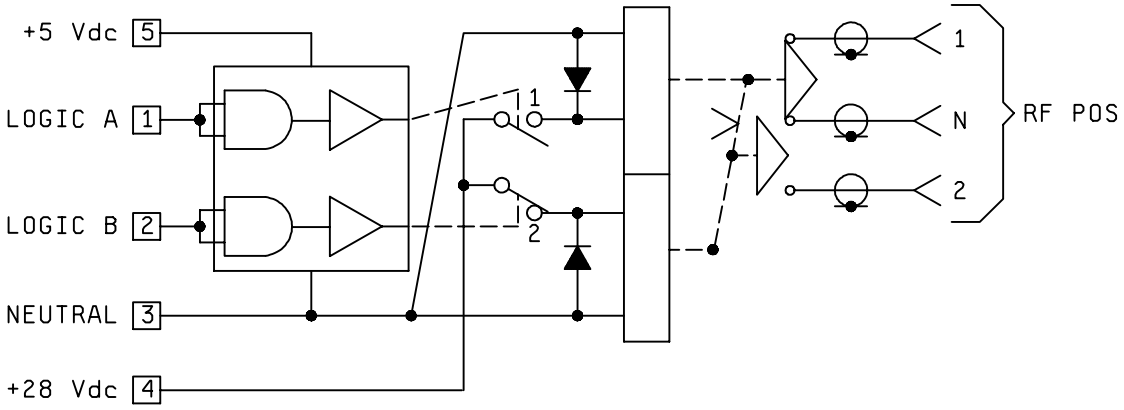

POSITION 1. ENERGIZE TERMINAL 1. N CONNECT TO 1,
2 IS OPEN CIRCUIT
POSITION 2. ENERGIZE TERMINAL 2. N CONNECT TO 2,
1 IS OPEN CIRCUIT

SCHEMATIC

Logic truth table		
RF path	Logic signal	
	A	B
N-1	1	0
N-2	0	1

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	1.15	1.09	29.2	27.7	K	.450	.430	11.4	10.9
B	.28	.22	7.1	5.6	L	.890	.870	22.6	22.1
C	.19	.13	4.8	3.3	M	1.37	1.31	34.8	33.3
D	.20	.14	5.1	3.6	N	.35	---	8.9	---
E	.12	.06	3.0	1.5	P	1.80	---	45.7	---
F	.130 dia	.110 dia	3.30 dia	2.79 dia	Q	.34	.28	8.6	7.1
G	.230	.210	5.84	5.33	R	.28	.22	7.1	5.6
H	.450	.430	11.4	10.9	S	.53	.47	13.5	11.9
J	.680	.660	17.27	16.76					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 10. Switch configuration and schematic, PIN M3928/15-15 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.


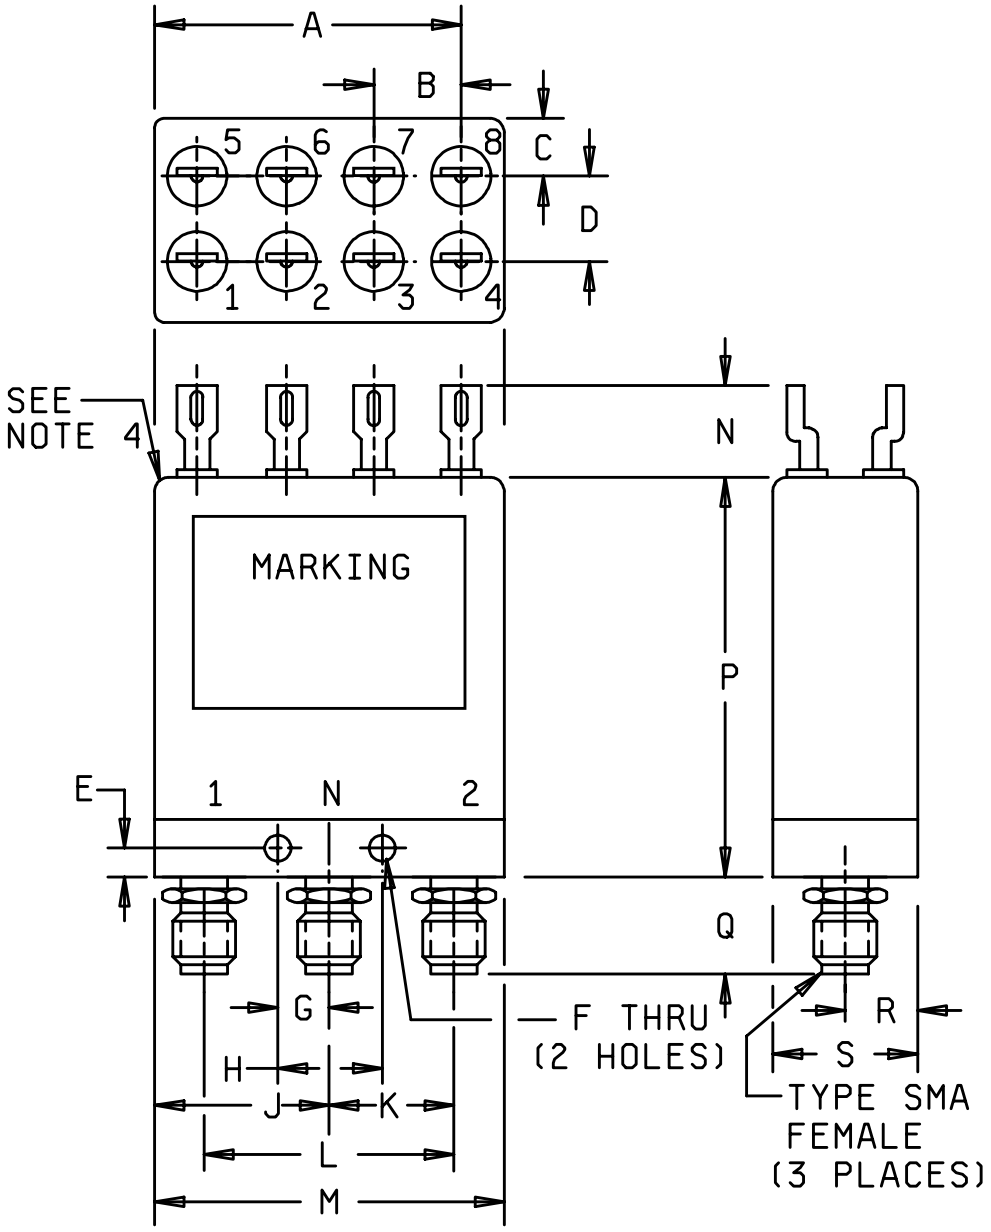


FIGURE 11. Switch configuration and schematic, PIN M3928/15-16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

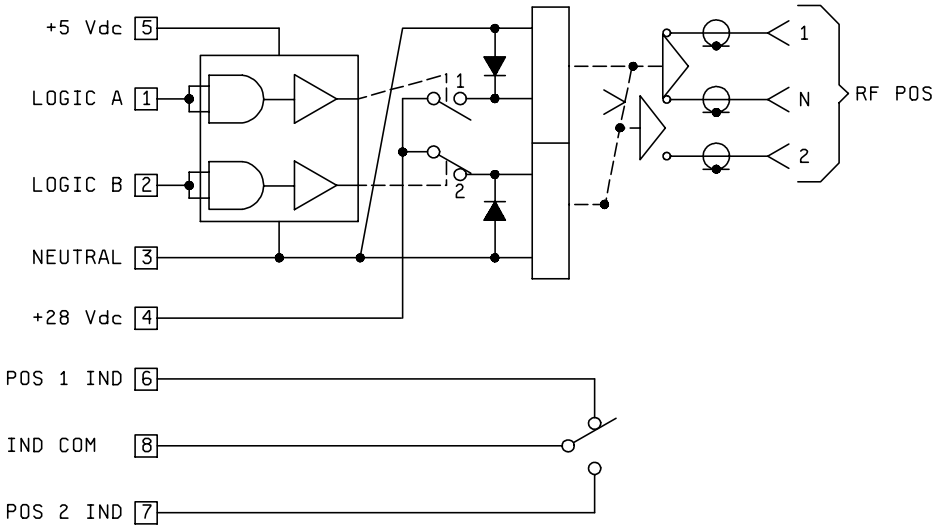

POSITION 1. ENERGIZE TERMINAL 1. N CONNECT TO 1, 2 IS OPEN CIRCUIT
POSITION 2. ENERGIZE TERMINAL 2. N CONNECT TO 2, 1 IS OPEN CIRCUIT

SCHEMATIC

Logic truth table		
RF path	Logic signal	
	A	B
N-1	1	0
N-2	0	1

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	1.15	1.09	29.2	27.7	K	.450	.430	11.4	10.9
B	.28	.22	7.1	5.6	L	.890	.870	22.6	22.1
C	.19	.13	4.8	3.3	M	1.37	1.31	34.8	33.3
D	.20	.14	5.1	3.6	N	.35	---	8.9	---
E	.12	.06	3.0	1.5	P	1.80	---	45.7	---
F	.130 dia	.110 dia	3.30 dia	2.79 dia	Q	.34	.28	8.6	7.1
G	.230	.210	5.84	5.33	R	.28	.22	7.1	5.6
H	.450	.430	11.4	10.9	S	.53	.47	13.5	11.9
J	.680	.660	17.27	16.76					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 11. Switch configuration and schematic, PIN M3928/15-16 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and performance characteristics. 1/

PIN M3928/15-	Fig. No.	Housing	Frequency range dc to GHz	VSWR	Insertion loss (dB)	Isolation (dB)	Switch time (ms)	Position indication circuit and rating	Life cycles x 1000	Fail-safe or latching	Operating current (A) 2/	Holding current (A) 2/	Nominal operating voltage	Pickup voltage	Dropout voltage	Power and indicator connector	Weight (oz)
				Max	Max	Min	Max				Max	Max					Max
01N, S 3/	1	I	18	1.5:1	0.5	60	20	None	1000	F	0.12	0.12	28 V dc	<20 V dc	<16 V dc	Solder terminal	2
02N, S 4/	1	E	18	1.5:1	0.5	60	20	None	1000	F	0.15	0.15	28 V dc	<20 V dc	<16 V dc	Solder terminal	2.5
03N, S 5/	2	E	18	1.5:1	0.5 6/	60	15	None	1000	F	0.12	0.12	28 V dc	<20 V dc	< 8 V dc 7/	Solder terminal	2.5
04N, S	2	E	18	1.5:1	0.5	60	15	.5 A at 10 W	1000	F	0.12	0.12	28 V dc	<20 V dc	<16 V dc	Solder terminal	2.5
05N, S 8/	3	E	18	1.5:1	0.5	60	20	.2 A at 40 V ac	1000	F	0.13	0.13	28 V dc	<24 V dc	<16 V dc	Solder terminal	2
07N, S 4/	5	E	18	1.5:1	0.5	60	20	None	1000	L	0.35	0	28 V dc	<20 V dc	---	Solder terminal	2
08N, S 4/	6	E	18	1.5:1	0.5	60	20	1A at 115 V ac	1000	L	0.35	0	28 V dc	<20 V dc	---	Solder terminal	2
09N, S	7	I	18 1.27-1.37	1.5:1 1.3:1	0.3	60	25	None	1000	F	0.13	0	28 V dc	9/	9/	Solder terminal	1.5
10N, S	8	I	18	1.5:1	0.5	60	20	1A at 115 V ac	1000	F	0.12	0.12	28 V dc	<20 V dc	<16 V dc	Solder terminal	2
11N, S	9	E	18	1.5:1	0.5	60	20	None	1000	F	0.06	0.06	48 V dc	<38 V dc	<30 V dc	Solder terminal	2
12 N, S	1	I	20 6	1.8:1 1.25:1	0.7 0.2	40 70	20	None	1000	F	0.12	0.12	28 V dc	<20 V dc	<16 V dc	Solder terminal	2
13 N, S	8	I	20	1.8:1	0.7	40	20	1A at 115 V ac	1000	F	0.12	0.12	28 V dc	<20 V dc	<16 V dc	Solder terminal	2
14N, S 10/	10	E	18	1.5:1	0.5	60	20	None	1000	F	0.21	0.12	28 V dc +5 V dc 11/	<20 V dc	<16 V dc	Solder terminal	3
15N, S 10/	11	E	18	1.5:1	0.5	60	20	None	1000	L	0.35	0	28 V dc +5 V dc 11/		<16 V dc	Solder terminal	3
16N, S 10/	12	E	18	1.5:1	0.5	60	20	1A at 115 V ac	1000	L	0.35	0	28 V dc +5 V dc 11/		<16 V dc	Solder terminal	3

1/ M3928/15-06 has been deleted.
2/ At 28 V dc and 20°C.
3/ Enclosure shall be explosion proof.
4/ Transient interface (RFI).
5/ The VSWR from dc to 7 GHz is 1.25 dB minimum.
6/ The insertion loss from dc to 7 GHz is 0.3 dB maximum.
7/ Switch must return to de-energized position at no less than 2 volts.
8/ Make before break sequence.
9/ Pulse operation: The switch shall change from open position to closed position when +4 V dc minimum is applied The switch shall change from closed to open when the voltage falls below +1.5 V dc.
10/ Logic voltage: Logic 0 - 0 to 0.4 V dc and Logic 1 - 2.4 to 5.5 V dc.
11/ +5 voltage deviation: ±0.5 V dc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 through 11.

Housing: These switches shall be optionally available with venting (for space applications). See MIL-DTL-3928, paragraphs 3.4.12.d and 6.2.i, and see the acquisition document for space application unique design and test requirements.

RF connectors: Female connectors (3 places) shall meet the requirements of MIL-PRF-39012 and shall mate with SMA type male connectors in accordance with MIL-PRF-39012/55.

Termination: Open.

Nominal impedance: 50 ohms.

Electrical and performance characteristics: See table I.

RF power handling capability (average): 25 watts (minimum).

Operating temperature: -55 deg C to +85 deg C, except for dash number 03 which is -55 deg C to +110 deg C.

Vibration: Method I.

Part or Identifying Number (PIN): M3928/15- (and dash number from table I).

Revision letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - MI
Navy - AS, MC, OS
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5985-1209-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.