MILITARY SPECIFICATION SHEET

Ⓐ

SWITCHES, RADIO FREQUENCY TRANSMISSION LINE (COAXIAL) (ELECTRICALLY OPERATED) CLASS 5, 1P3T

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-3928.


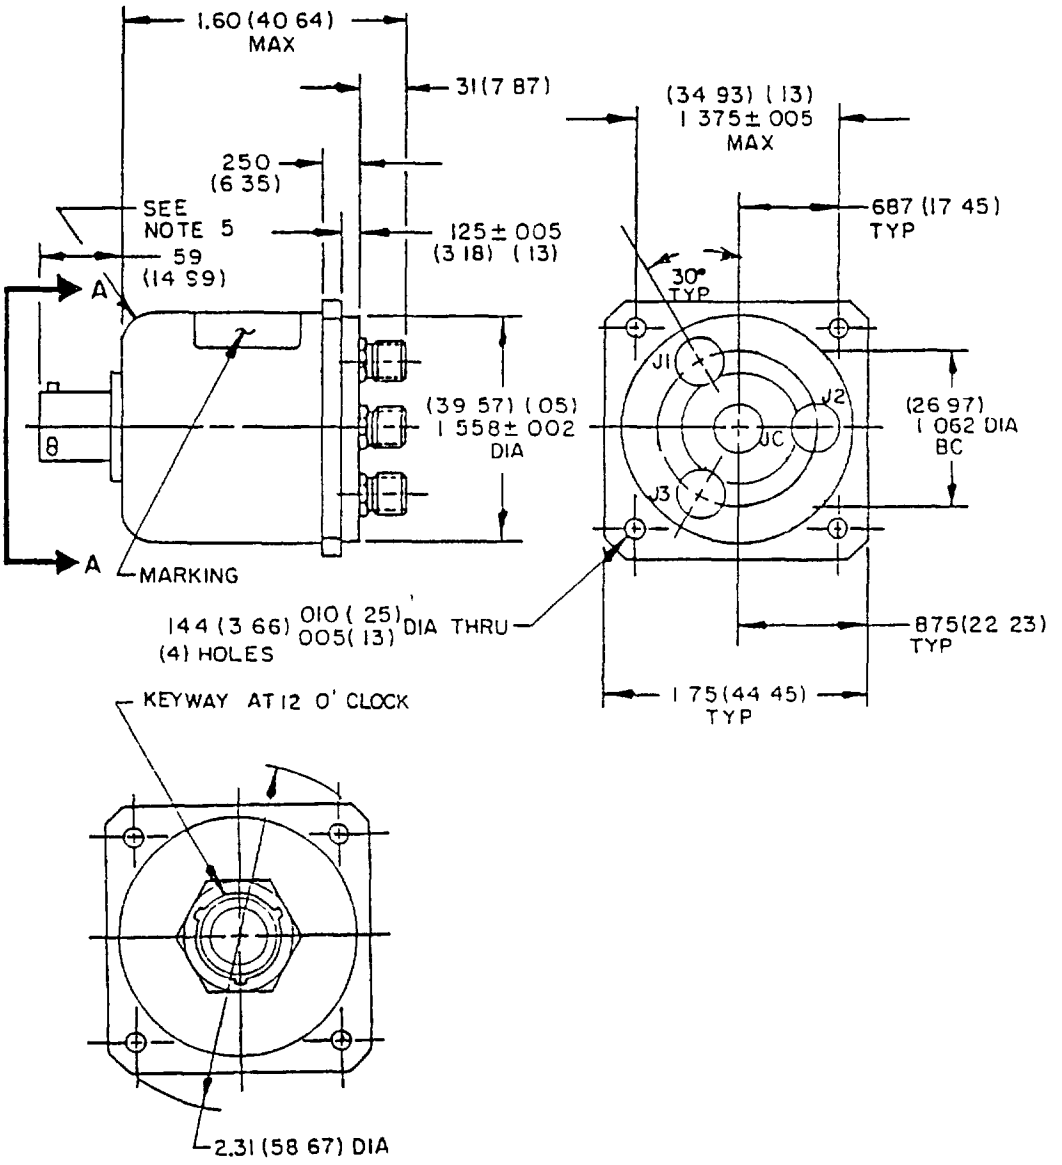


FIGURE 1. Switch configuration and schematic, part number M3928/16-02.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

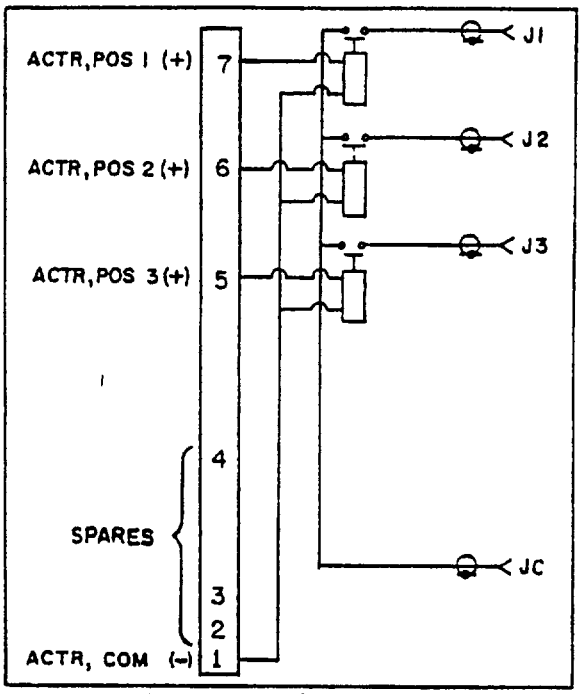

SCHEMATIC (SHOWN IN DEENERGIZED POSITION)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ±0.03 (0.8 mm) for two place decimals.
5. Round corners of case may be squared.

FIGURE 1. Switch configuration and schematic, part number M3928/16-02 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I Electrical and performance characteristics

2/ Part number M3928/16-	Figure no	Housing	Frequency range dc to GHz	VSWR	Insertion loss (dB)	Isolation (dB)	Switch time (ms)	Position indication circuit and rating	Life cycles x 1000	Fail-safe or latching	Operating current (A) 1/	Holding current (A) 1/	Nominal operating voltage	Pickup voltage	Dropout voltage	Power and indicator connector	Weight (oz)
02N S	1	1	18	Max 1.3:1 @ 8 GHz 1.5:1 18 GHz	Max 0.3 8 GHz 0.5 @ 18 GHz	Min 60	Max 20	NONE	1000	NONE	Max 17	Max 17	28 V dc	20 V dc	16 V dc	RTK07-8/P (Deutsch) or equal	Max 7

1/ Part number M3928/16-01 is deleted from this specification, there are no requirements for this item

2/ At 28 V dc and 20°C

MIL-S-3928/16A

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Termination: Open.

Nominal impedance: 50 ohms.

RF connectors: Female connectors (4 places) shall meet the requirements of MIL-C-39012 and shall mate with SMA type male connectors per MIL-C-39012/55.

Electrical and performance characteristics: See table I.

RF power handling capability (average): 25 watts (minimum).

Operating temperature: -54°C to +85°C.

Vibration: Method I.

Part number: M3928/16- (and dash number from table I).

Substitutability: Switches covered by this specification sheet are substitutable for the manufacturer's or original equipment manufacturer's (OEM) part numbers specified in table II. This information in no way implies that the manufacturer's or OEM part number or NSN is suitable as a substitute for the military part number.

TABLE II. Substitution data.

Part number M3928/16-	OEM or manufacturer's code	OEM or manufacturer's part number	NSN 5985-
02	49956	950953-1	
02	82152	143C70100	01-013-4087

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1016-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:18Z
Check the source to verify that this is the current version before use.