INCH-POUND


MIL-DTL-3928/21C
15 August 2001
SUPERSEDING
MIL-S-3928/21B
15 July 1988


DETAIL SPECIFICATION SHEET

SWITCHES, RADIO-FREQUENCY TRANSMISSION LINE (COAXIAL) (ELECTRICALLY OPERATED) CLASS 4, TR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Requirements for acquiring the switch described herein shall consist of this specification and MIL-PRF-3928.

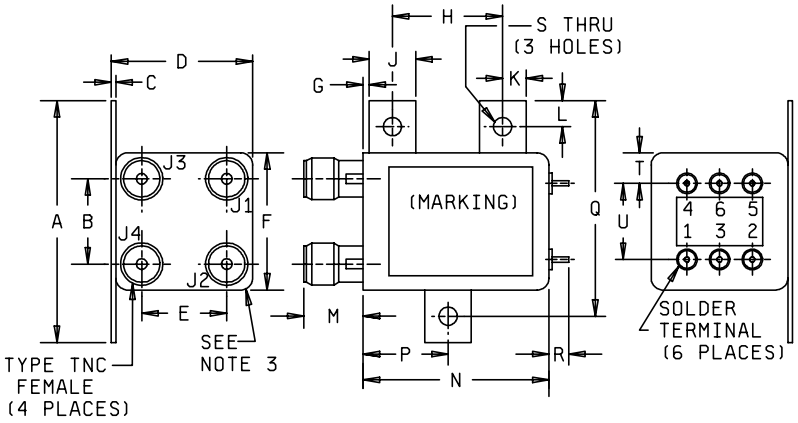

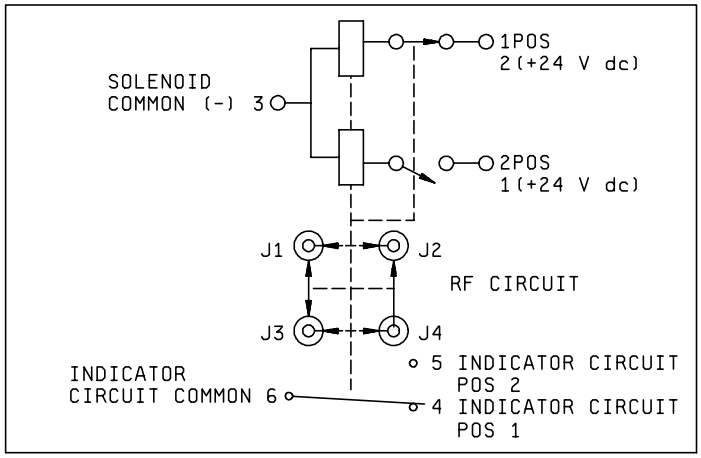

POSITION 1 ENERGIZED TERMINAL NO.2 J1-J3 AND J2-J4
POSITION 2 ENERGIZED TERMINAL NO.1 J1-J2 AND J3-J4
(DOTTED LINES)

SCHEMATIC (SHOWN IN POSITION 1)

FIGURE 1. PIN M3928/21-01.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:20Z
Check the source to verify that this is the current version before use.


Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	2.19	2.13	55.6	54.1	L	.22	.16	5.6	4.1
B	.646	.626	16.41	15.90	M	.720	---	18.29	---
C	.66	.60	16.8	15.2	N	2.15	---	54.6	---
D	1.37	---	34.8	---	P	.553	.537	14.05	13.64
E	.646	.626	16.41	15.90	Q	1.790	1.770	45.47	44.96
F	1.30	---	33.0	---	R	.300	---	7.62	---
G	.015	---	0.38	---	S	.159 dia	.139 dia	4.04 dia	3.53 dia
H	1.098	1.082	27.89	27.48	T	.35	.29	8.9	7.4
J	.53	.47	13.5	11.9	U	.65	.59	16.5	15.0
K	.28	.22	7.1	5.6					

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 1. PIN M3928/21-01 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:20Z
Check the source to verify that this is the current version before use.

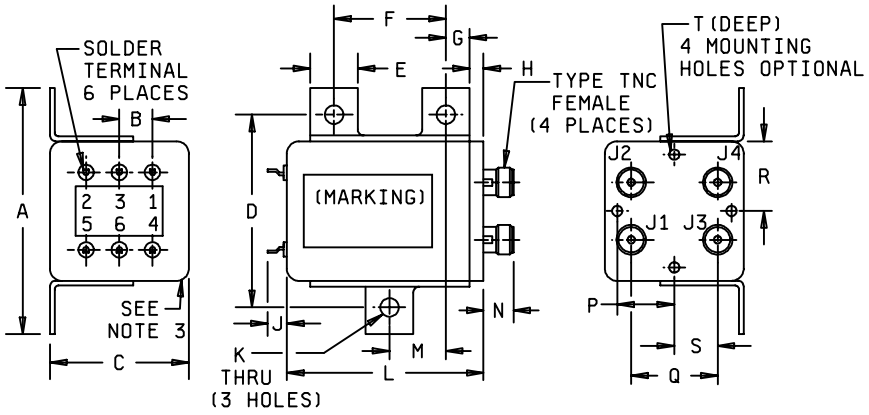

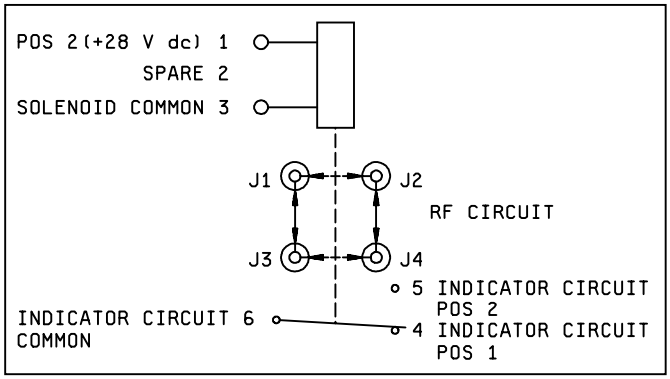

POSITION 1 DEENERGIZED OR FAILSAFE POSITION, J1-J3 AND J2-J4
POSITION 2 ENERGIZED POSITION, J1-J2 AND J3-J4.


SCHEMATIC (SHOWN IN POSITION 1)


Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	3.28	3.22	83.3	81.8	K	.203 dia	.183 dia	5.16 dia	4.65 dia
B	.53	.47	13.5	11.9	L	2.60	---	66.0	---
C	1.90	---	48.3	---	M	.760	.740	19.30	18.80
D	2.610	2.590	66.29	65.79	N	.650	---	16.51	---
E	.63	.57	16.0	14.5	P	.730	.710	18.54	18.03
F	1.510	1.490	38.35	37.85	Q	.895	.875	22.73	22.23
G	.33	.27	8.4	6.9	R	.885	.865	22.48	21.97
H	.28	.22	7.1	5.6	S	.452	.432	11.48	10.97
J	.320	---	8.13	---	T	.138-32UNC-2B X .25		3.50-32UNC-2B X 6.35	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 2. PIN M3928/21-02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:20Z
Check the source to verify that this is the current version before use.

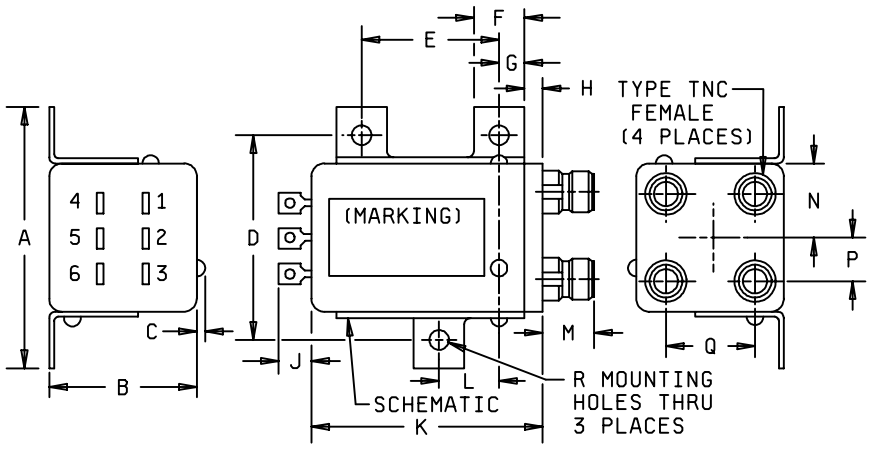

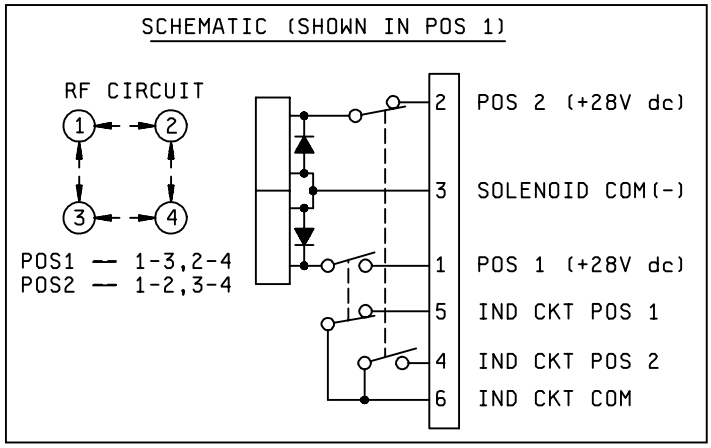

Dimensions									
Letter	Inches		Millimeters		Letter	Inches		Millimeters	
	Max	Min	Max	Min		Max	Min	Max	Min
A	3.28	3.22	83.3	81.8	J	.32	---	8.1	---
B	1.80	---	45.7	---	K	2.60	---	66.0	---
C	.09	---	2.3	---	L	.78	.72	19.8	18.3
D	2.610	2.590	66.29	65.79	M	.65	---	16.5	---
E	1.510	1.490	38.35	37.85	N	.885	.865	22.48	21.97
F	.63	.57	16.0	14.5	P	.452	.432	11.48	10.97
G	.33	.27	8.4	6.9	Q	.895	.875	22.73	22.23
H	.28	.22	7.1	5.6	R	.198	.192	5.03	4.88

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerances are ± .010 (± 0.25 mm) for three place decimals and ± .03 (±0.8 mm) for two place decimals.
4. Round corners of case may be squared.

FIGURE 3. PIN M3928/21-03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:20Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and performance characteristics.

PIN M3928/21-	Fig. No.	Housing	Frequency range dc to GHz	VSWR	Insertion loss (dB)	Isolation (dB)	Switching time (ms)	Position indication circuit and rating	Life cycles x 1000	Fail-safe or latching	Operating current (A) 1/	Holding current (A) 1/	Nominal operating voltage	Pickup voltage (less than)	Dropout voltage (less than)	Power and indicator connector	Weight (oz)
				Max	Max	Min	Max				Max	Max					Max
01N, S 2/	1	I	11	1.5:1	0.5	50	30	Yes	100	L	2.6	0	28 V dc	20 V dc	---	Solder terminals	6
02N, S	2	E	12.4	1.5:1	0.5	60	25	2A at 28 V dc	100	F	0.5	0.2	28 V dc	20 V dc	5 V dc	Solder terminals	12
03N, S	3	I	12.4 1.57	1.5:1 1.2:1	0.5 0.1	60	20 30	0.1 A at 28 V dc	100	F	0.65	---	28 V dc	20 V dc	---	Solder terminals	12

1/ At 28 V dc and 20 deg C.

2/ Transient interference (RFI).

3/ RF power handling capacity: 80 watts minimum at sea level and 10^{-5} through 10^{-10} torr.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1, 2, and 3.

RF connectors: Female connectors (4 places) shall meet the requirements of MIL-PRF-39012 and shall mate with TNC type male connectors in accordance with MIL-PRF-39012/26.

Electrical and performance characteristics: See table I.

RF power handling capability (average): 50 watts (minimum).

Nominal impedance: 50 ohms.

Termination: Open.

Vibration: Method I.

Operating temperature: -55 deg C to +85 deg C.

Part or Identifying Number (PIN): M3928/21- (and dash number from table I).

Revision letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AV, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5985-1209-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:20Z
Check the source to verify that this is the current version before use.