
MILITARY SPECIFICATION SHEET

© SWITCHES, RADIO FREQUENCY
TRANSMISSION LINE (COAXIAL)(MANUALLY AND MOTOR OPERATED)
CLASS 1 (TYPE N CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-3928.

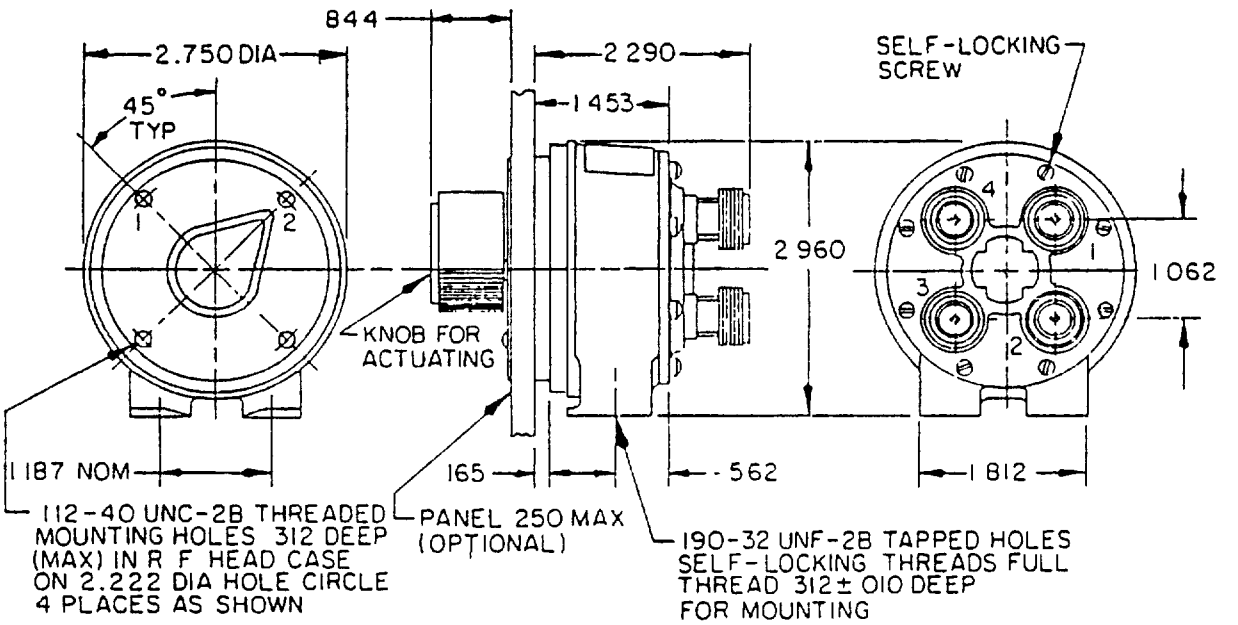

Inches	mm	Inches	mm
.010	0.25	1.062	26.97
.112	2.84	1.187	30.15
.165	4.19	1.453	36.91
.190	4.83	1.812	46.02
.250	6.35	2.222	56.44
.312	7.93	2.290	58.17
.562	14.30	2.750	69.85
.844	21.44	2.960	75.18


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals.

© FIGURE 1. Dimensions and configuration for part numbers M3928/9-05 and M3928/9-13

© denotes charges

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:16Z
Check the source to verify that this is the current version before use.

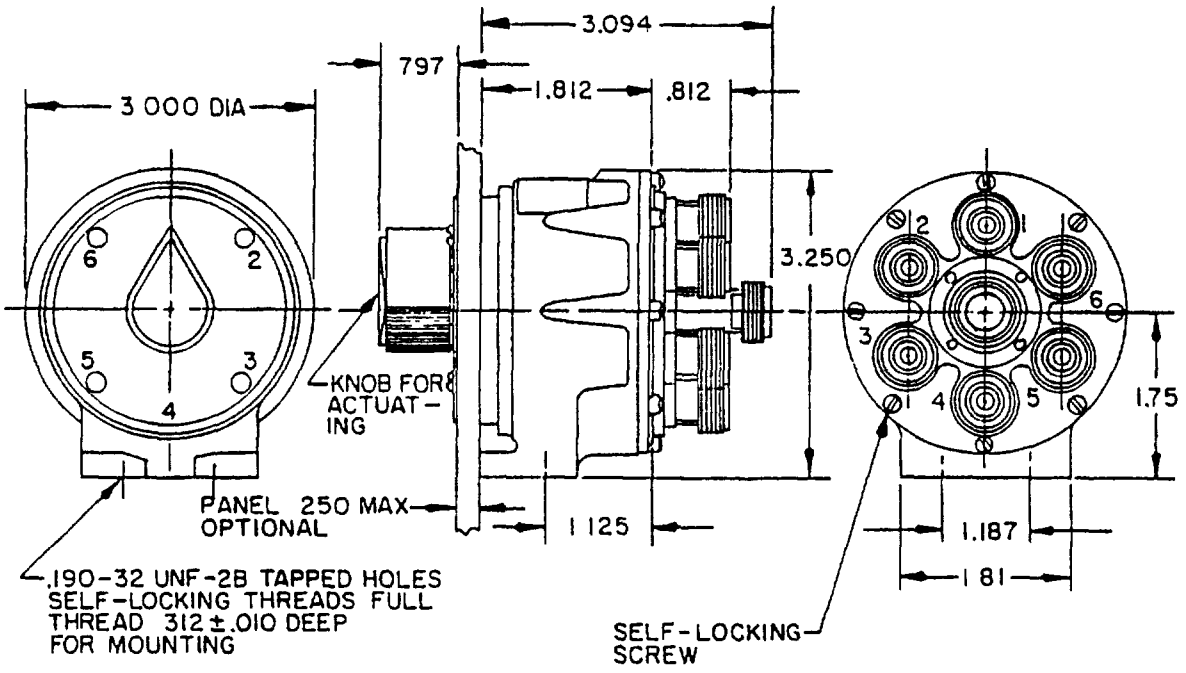



Inches	mm
.010	0.25
.190	4.83
.250	6.35
.312	7.92
.797	20.24
.812	20.62
1.125	38.58
1.187	30.15
1.75	44.45
1.812	46.02
3.000	76.20
3.094	78.59
3.250	82.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals.


© FIGURE 2. Dimensions and configuration for part numbers M3928/9-04, M3928/9-14, and M3928/9-15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:16Z
Check the source to verify that this is the current version before use.

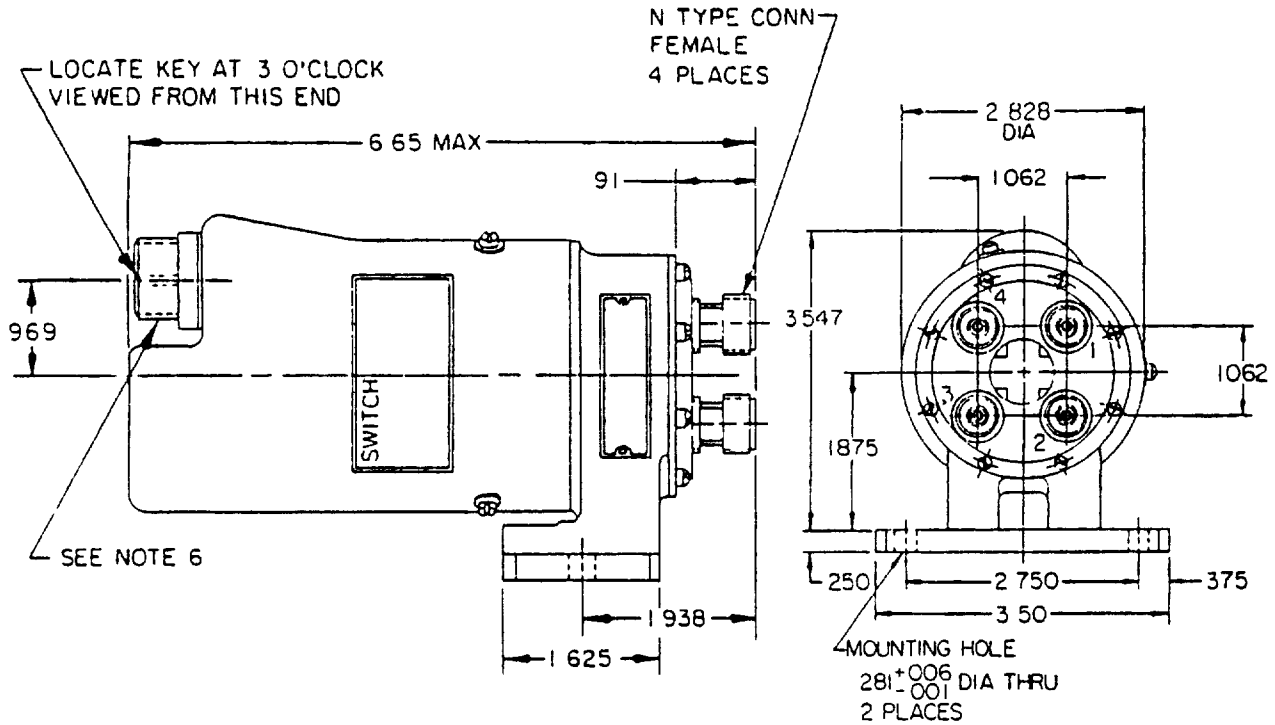

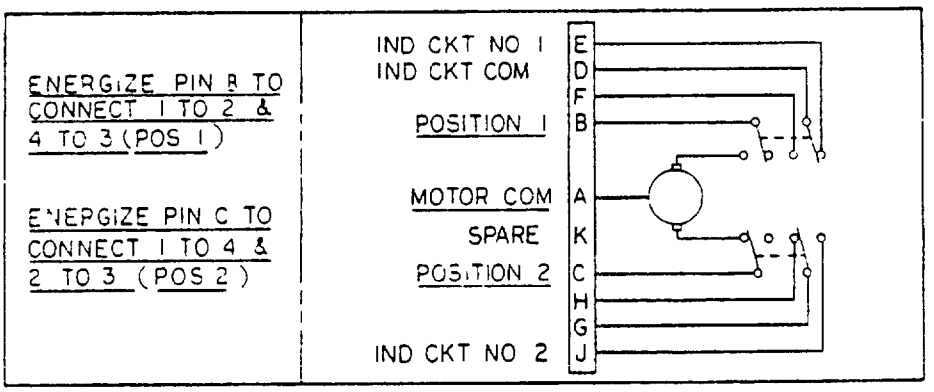

SCHEMATIC



RF CIRCUIT

Inches	mm	Inches	mm
.001	0.03	1.625	41.28
.006	0.15	1.875	47.63
.250	6.35	1.938	49.23
.281	7.14	2.750	69.85
.375	9.53	2.828	71.83
.91	23.11	3.50	88.90
.969	24.61	3.547	90.09
1.062	26.97	6.65	168.91

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ±.03 (0.76 mm) for two place decimals.
4. Remove all burrs and sharp edges .015 (0.38 mm) maximum.
5. All machined surfaces shall be in accordance with ANSI 946.1.
6. Mates with MS3452 W-12-10S.
7. For part number M3928/9-04, the center connector shall be deleted.

© FIGURE 3 Dimensions and configuration for part number M3928/9-17.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:16Z
Check the source to verify that this is the current version before use.

© TABLE I. Electrical and performance characteristics

Part no M3928/9-- 1/	Figure no.	Housing	Manual or remote	Solenoid or motor	Frequency range dc to GHz	VSWR	Insertion loss (dB)	Isolation (dB)	Config	Position indicating circuit (and current rating)	Life cycles x 1000	Nominal oper voltage	Oper. current (A)	Switch time (ms)	Power connector	Weight (lbs)
						max	max	min					max			max
04N,S	4	I	M	---	10	1.3	0.31	50	2P2T	None	200	---	---	---	---	1-3/4
05N S	3	I	M	---	10	1.3	0.31	50	1P2T	None	200	---	---	---	---	1-3/4
13N,S	3	I	M	---	10	1.3	0 31	50	TR	None	200	---	---	---	---	1-3/4
14N,S	4	I	M	---	10	1.3	0.31	50	1P3T	None	200	---	---	---	---	1-3/4
15N,S	4	I	M	---	10	1 3	0 31	50	1P6T	None	200	---	---	---	---	1-3/4
17N,S	5	I	R	M	12.4	1.5	0 5	60	TR	Yes	60	28 V dc	3.0	200	See fig 3	3

1/ M3928/9-01, M3928/9-02, M3928/9-03, M3928/9-06, M3928/9-07, M3928/9-08, M3928/9-09, M3928/9-10, M3928/9-11, M3928/9-12, and M3928/9-16, have been deleted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Ⓒ Dimensions and configurations. See figures 1 through 3.

Electrical and performance characteristics: See table I.

RF power handling capability (average): 100 watts (min).

RF connectors: Series N connectors shall mate with series N male connectors per MIL-C-39012/1.

Nominal impedance 50 ohms.

Termination Open.

Vibration Method I.

Operating temperature: -55°C to +85°C.

Part number: M3928/9- (dash number from table I).

Ⓒ TABLE II. Part number to type cross-reference. 1/

Part number M3928/9-	Type SA- /U
04	1336
05	1337
13	1345
14	1346
15	1347
17	---

1/ Part numbers M3928/9-01, M3928/9-02, M3928/9-03, M3928/9-06, M3928/9-07, M3928/9-08, M3928/9-09, M3928/9-10, M3928/9-11, M3928/9-12, and M3928/9-16 have been deleted.

Substitutability: Switches covered by this specification sheet are substitutable for the manufacturer's or original equipment manufacturer's (OEM) part numbers specified in table III. This information in no way implies that the manufacturer's or OEM part number or NSN is suitable as a substitute for the military part number.

Ⓒ TABLE III Substitution data.

Part number M3928/9-	OEM or manufacturer's code	OEM or manufacturer's part number	NSN 5985-
04	82152	M1460-H22	---
05	82152	M1460-H20	---
13	82152	M1460-H30	---
14	82152	M1460-HA3	---
15	82152	M1460-HA6	00-763-3823
15	82577	721862-008	00-763-3823

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:16Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
DLA - ES

Review activities:
Army - MI
Navy - OS
Air Force - 11, 99
DLA - ES

User activities:
Army - AV, AT, ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:

(Project 5985-1016-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:16Z
Check the source to verify that this is the current version before use.