
MILITARY SPECIFICATION SHEET

SWITCHES, RADIO FREQUENCY
TRANSMISSION LINE (COAXIAL) (ELECTRICALLY OPERATED)
CLASS 4, 2P2T


(A)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-3928.

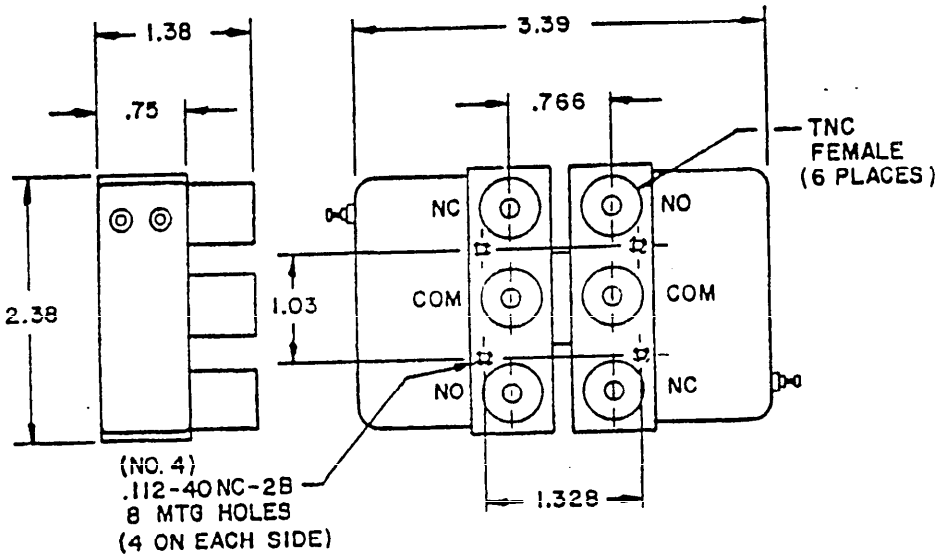

Inches	mm
.112	2.84
.75	19.0
.766	19.46
1.03	26.2
1.328	33.73
1.38	35.1
2.38	60.5
3.39	86.1

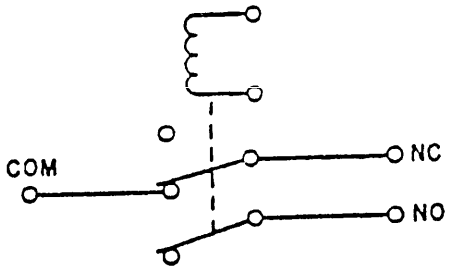

SCHEMATIC (NON SHORTING)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ±.03 (0.8 mm) for two place decimals.

FIGURE 1. Switch configuration and schematic, part number M3928/23-01.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026/10 07:22:21
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1.

Operation:

Remote:

Fail-safe.

Termination: Nonshorting.

Nominal impedance: 50 ohms.

RF connectors: Female connectors (6 each) shall meet the requirements of MIL-C-39012 and shall mate with TNC type male connectors per MIL-C-39012/26.

RF voltage rating: 1.5 kV peak.

Operating temperature: -55°C to +85°C.

Power and indicating connector: Solder terminals.

Frequency range: DC to 6 GHz.

Housing: E.

Weight: 10 ounces, maximum.

VSWR: 1.5:1 maximum.

Insertion loss: .30 dB maximum.

Isolation: 27 dB at 2 GHz minimum.

RF power handling capability:

0-0.5 GHz = 5 kW peak.
0.5-3.0 GHz = 3 kW peak.
3.0-6.0 GHz = 2 kW peak.

Switching time:

Operate: 25 ms, maximum.

Release: 15 ms, maximum.

Ⓐ Operating voltage: 28 V dc, nominal.

Life (times 1,000): 1,000.

Vibration: Method II.

Ⓐ Part number: M3928/23-01N or M3928/23-01S.

Ⓐ NOTE: Switches covered by this specification sheet are substitutable for the manufacturer's or original equipment manufacturer's (OEM) part numbers specified in table I. This information in no way implies that the manufacturer's or OEM part number or NSN is suitable as a substitute for the military part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:21Z
Check the source to verify that this is the currenversion before use.

TABLE I. Substitution data.

Part number M3928/23-	OEM or manufacturer's code	OEM or manufacturer's part number	NSN 5985-
01	10001	3005453	00-520-1032
01	74868	360-11897-15	00-520-1032

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - AS, CG, MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1016-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:21Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:21Z
Check the source to verify that this is the current version before use.