
MILITARY SPECIFICATION SHEET

SWITCHES (COAXIAL), RADIO FREQUENCY, TRANSMISSION LINE (ELECTRICALLY OPERATED) CLASS 6, 1P2T

The complete requirements for procuring the switch described herein shall consist of this document and the latest issue of Military Specification MIL-S-3928.

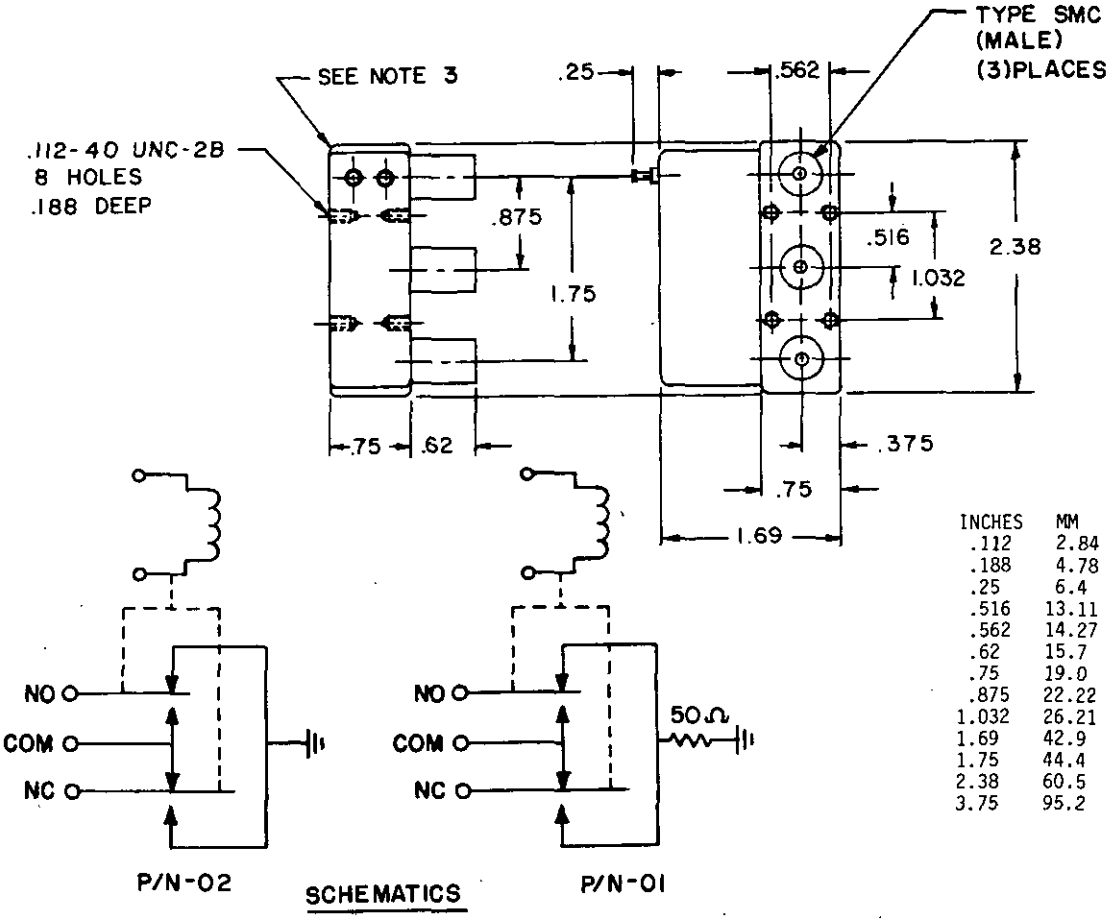

INCHES	MM
.112	2.84
.188	4.78
.25	6.4
.516	13.11
.562	14.27
.62	15.7
.75	19.0
.875	22.22
1.032	26.21
1.69	42.9
1.75	44.4
2.38	60.5
3.75	95.2

SCHEMATICS

POSITION 1. (DEENERGIZED OR FAILSAFE POSITION.) C CONNECTS TO NC CONNECTOR. NO IS OPEN CIRCUIT.

POSITION 2. (ENERGIZED POSITION.) C CONNECTS TO NO CONNECTOR. NC IS OPEN CIRCUIT.

SCHEMATIC (SHOWN IN POSITION 1)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Round corners of case may be squared.
4. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.03 (.8 mm) for two place decimals.

FIGURE 1. Switch configuration and schematic, part numbers M3928/24-01, 02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:21Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and performance characteristics.

Part no. M3928/24-	Figure no.	Housing	Frequency range dc to GHz	VSWR 2/	Insertion loss (db) 3/	Isolation (db)	Switch time (ms)	Position indicating circuit & rating	Life cycles (x 1000)	Fail-safe or latching	Nominal oper. voltage	Pickup voltage (less than)	Dropout voltage (less than)	Power and indicator connector	Weight (oz)
				max	max	min	max					min			max
01 1/	1	E	@ 6	1.35:1	.50	60	25	None	1,000	F	115Vac	93Vac	5Vac	Solder terminals	4.5
02 1/	1		@ 6	1.5:1	.50	60	25	None	1,000	F	115Vac	93Vac	5Vac	Solder terminals	4.5

1/ Switching operate time 25ms,
switching release time 15ms.
2/ The VSWR at 3 GHz is 1.2:1 for dash number 01 and 1.25:1 for dash number 02.
The VSWR at 0.5 GHz is 1.1:1 for dash number 01 and 1.07:1 for dash number 02.
3/ The insertion loss at 3 GHz is .20 dB for dash number 01 and .25 for dash number 02. The insertion loss at 0.5 GHz is .06 for dash numbers 01 and 02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration – See figure 1.

RF connectors – SMC male connectors (3 places) shall meet the requirements of MIL-C-39012/74 and shall mate with SMC type female connectors per MIL-C-39012/75.

Electrical and performance characteristics – See table I.

RF power handling capability (average) – 50 watts (min), (peak): 2 KW.

Nominal impedance – 50 ohms.

Termination – Open.

Vibration – Method I.

Operating temperature – -55°C to +85°C.

Part munber – M3928/24 (dash number from table I).

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI,
Navy -
Air Force - 11, 17, 99
DLA - ES

User activities:
Army -
Navy - AS, MC, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0878-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:21Z
Check the source to verify that this is the current version before use.