
MILITARY SPECIFICATION SHEET

SWITCHES, RADIO FREQUENCY
TRANSMISSION LINE (COAXIAL) (ELECTRICALLY OPERATED)
CLASS 5, 1P5T

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-3928.

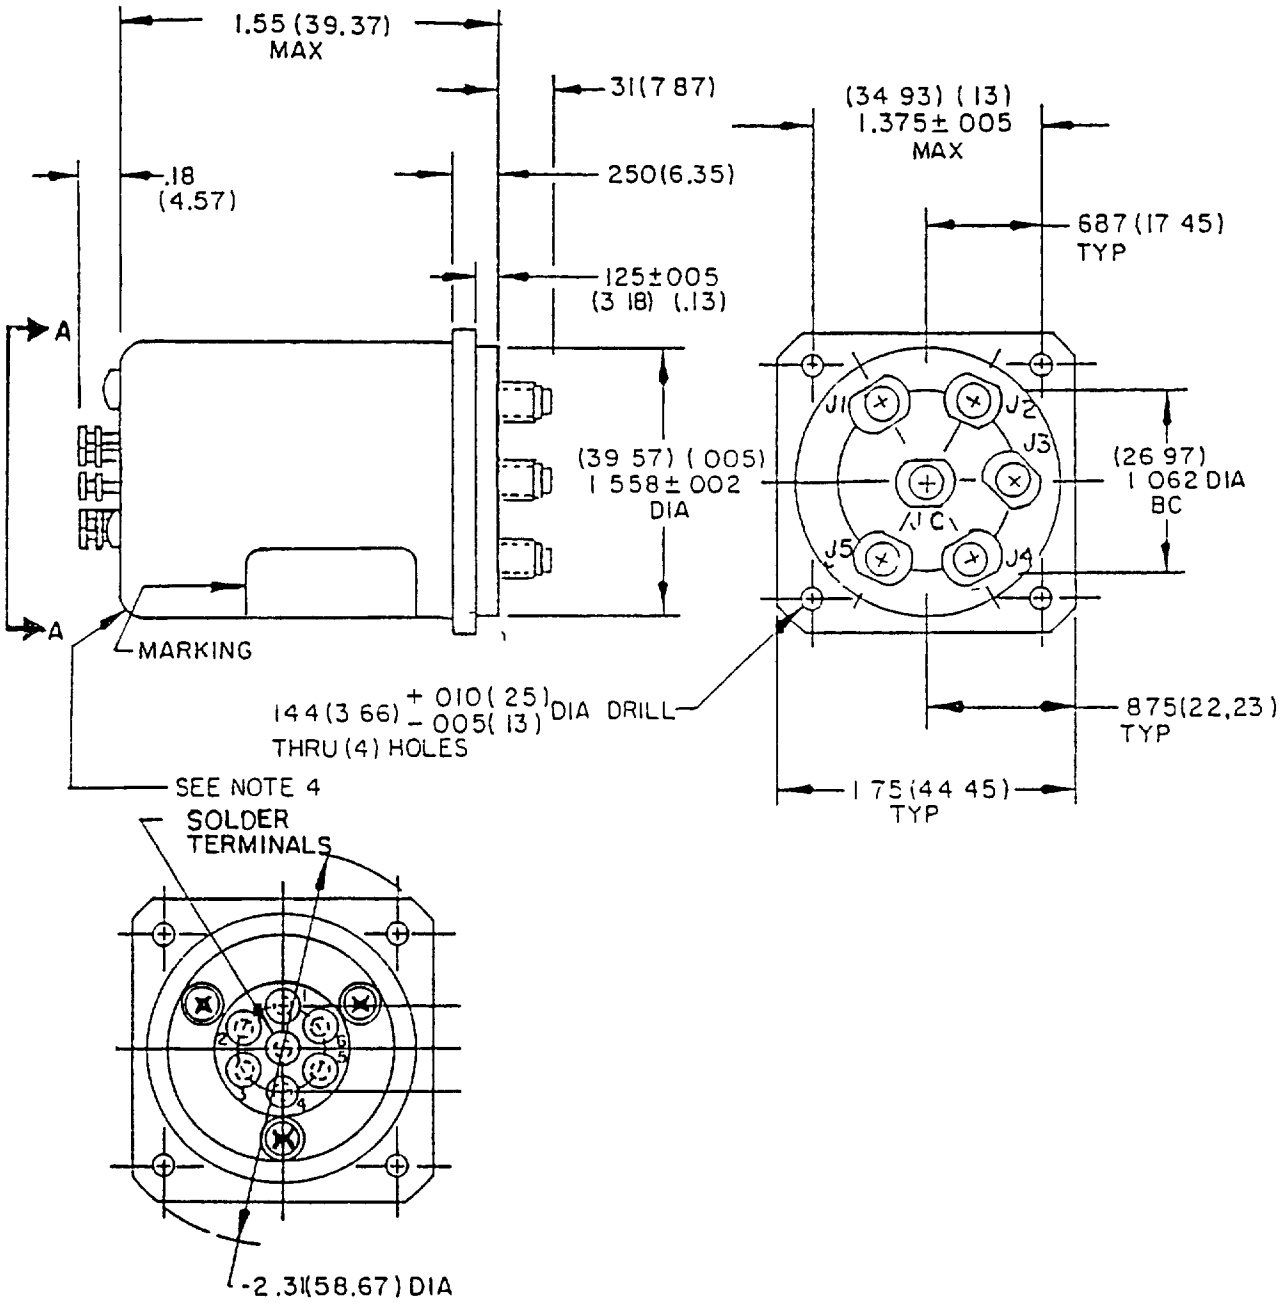

VIEW A-A

FIGURE 1. Switch configuration and schematic, part number M3928/25-01.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-01-16T22:31Z
Check the source to verify that this is the current version before use.

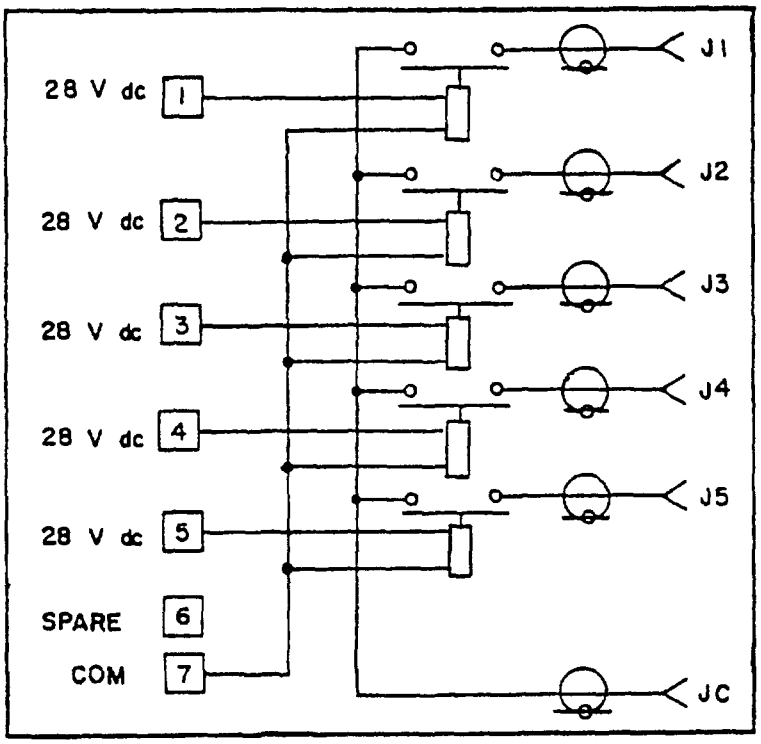

SCHEMATIC (SHOWN IN DEENERGIZED POSITION)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ±.03 (0.8 mm) for two place decimals.
5. Round corners of case may be squared.

FIGURE 1. Switch configuration and schematic, part number M3928/25-01 - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations. See figure 1.

Operation: Remote.

Termination: Nonshorting.

Nominal impedance. 50 ohms.

RF connectors: Female connectors (6 each) shall meet the requirements of MIL-C-39012 and shall mate with SMA type male connectors per MIL-C-39012/55.

RF voltage rating: 1.5 kV peak.

Operating temperature: -55°C to +85°C.

Frequency range: DC to 18 GHz.

Housing: I.

Weight: 10 ounces, maximum.

VSWR: 1.5:1 maximum.

Insertion loss: 0.5 dB maximum.

Isolation: 80 dB at 100 MHz and 60 dB at 18 GHz.

RF power handling capability: 25 watts minimum.

Switching time: 20 ms maximum.

Operating voltage: 26 V dc, nominal.

Operating current: .17 ampere, maximum.

Pickup voltage: Less than 20 V dc.

Dropout voltage: Less than 16 V dc.

Vibration: Method I.

Part number: M3928/25-01N or -01S.

NOTE: Switches covered by this specification sheet are substitutable for the manufacturer's or original equipment manufacturer's (OEM) part numbers specified in table I. This information in no way implies that the manufacturer's or OEM part number or NSN is suitable as a substitute for the military part number.

TABLE I. Substitution data.

Part number M3928/25-	OEM or manufacturer's code	OEM or manufacturer's part number	NSN 5985-
01	81205	407-49024-1	01-225-7168
01	82152	145C70600	01-225-7168

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:21Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - AS, CG, MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1016-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:21Z
Check the source to verify that this is the current version before use.