NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/292D
04 April 2022
SUPERSEDING
MIL-DTL-11484/292C
1 June 2017

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, CIVILIAN AWARD, MARINE CORPS

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

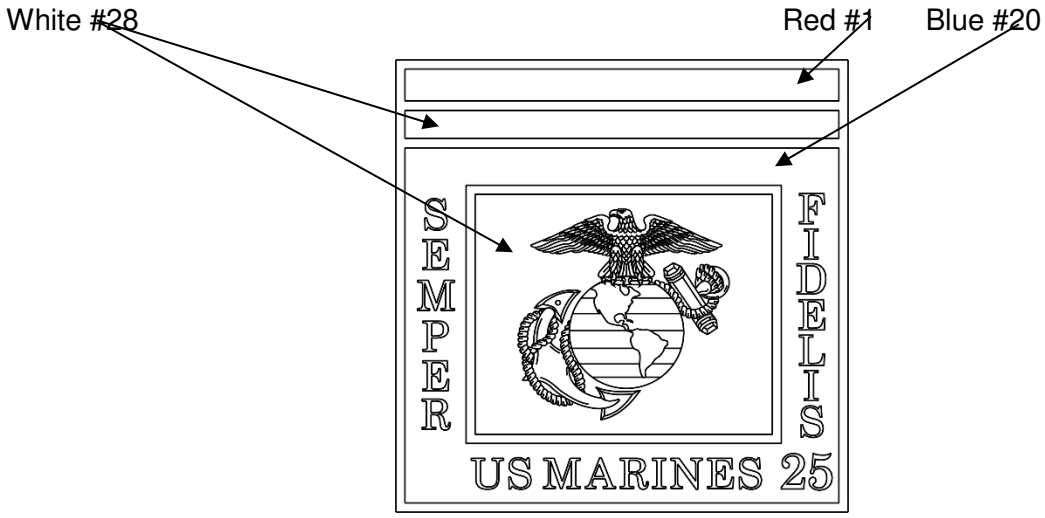

YEARS OF SERVICE:
0-4: blank
5
10
15
20
25
30
35
40
45
50

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:49Z
Check the source to verify that this is the current version before use.

FINISH: Epoxy resin, 24K Gold Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

DIMENSIONS:
HEIGHT: 3/4 inch (REF)
WIDTH: 3/4 inch (REF)
THICKNESS (At edge): 0.064 ± 0.010 inch

PRESENTATION CASE: Presentation case for the lapel button shall be a hinged red velour box with rounded corners measuring approximately 1-3/4 inches wide by 2-1/8 inches deep by 1-1/8 inches high. The interior of the box shall have a matching red velour base pad with a white satin top liner. The presentation case shall be provided with a 2-piece outer packer. Unless otherwise stated in the contract or purchase order, the color red shall be a good match to Marine Corps Scarlet, cable number HBD 67154, from the Department of Defense Standard Shades for Heraldic Yarns for Embroidery and Ribbons, 1993 Edition. (The yarn book is available from Ira Green, Inc., 177 Georgia Avenue, Providence, Rhode Island 02905, or the contracting office may supply a sample of the yarn or an appropriate color swatch.) As an alternate, the contracting office may require matching to Pantone Matching System (PMS) chip number 186U. (Contact information for Pantone is as follows: Pantone, Inc., 590 Commerce Boulevard, Carlstadt, NJ 07072-3098, telephone 201-935-5500, www.pantone.com.)

MOTTO: The words "SEMPER," "FIDELIS," and "U.S. MARINES" shall appear as raised gold letters within the blue frame. The raised gold number representing years of service shall be added to the working die in the style and location indicated.

ATTACHING DEVICE:
1. Attaching device shall be prong with pick and flat ball clutch type.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated below, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
White	#28
Blue	#20

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The use of any type of plastic packaging material is prohibited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:49Z
Check the source to verify that this is the current version before use.

3. Hard cloisonné enamel may be used as alternative to epoxy. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Navy - MC

Preparing activity:
Army - IH

Review activities:
Navy - NU
DLA - CT

(Project No. 8455-2022-087)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:49Z
Check the source to verify that this is the current version before use.