OO-G-669G
August 17, 1995
SUPERSEDING
OO-G-669F
December 12, 1977

FEDERAL SPECIFICATION

GRINDER, PNEUMATIC, HORIZONTAL AND VERTICAL

The General Services Administration has authorized the use of this Federal Specification by all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers horizontal and vertical pneumatic grinders used for grinding, snagging, and wire brushing.

1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, and styles. Horizontal and vertical pneumatic grinders shall be of the following types and styles, as specified (see 6.2):

Type I - Horizontal grinders

Class 1 - Standard throttle
- Size 2 inch
  - Style a - Extended spindle
  - Style b - Short spindle
- Size 2-1/2 inch
  - Style a - Extended spindle
  - Style b - Short spindle
- Size 3 inch
- Size 4 inch
- Size 6 inch
- Size 8 inch

Class 2 - Safety lock-off throttle
- Size 3 inch
- Size 4 inch
- Size 6 inch
- Size 8 inch

Type II - Vertical grinders

Class 1 - Standard throttle
- Size 4 inch
- Size 6 inch - Standard duty
- Size 6 inch - Heavy duty

Class 2 - Safety lock-off throttle
- Size 4 inch
- Size 6 inch - Standard duty
- Size 6 inch - Heavy duty

DISTRIBUTION STATEMENT A. Approved for public distribution: distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

PPP-P-40 - Preservation and Packing of Hand Tools and Tool Accessories for Power Driven, Metal and Woodworking Machinery

Federal Standard:

FED-STD-H28 - Screw-Threads Standards for Federal Services

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and Commercial Item Descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

2.2 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American National Standard Institute (ANSI):

ANSI B7.1 - American Standard Safety Code for the Use, Care, and Protection of Abrasive Wheels

(Application for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

American National Standards Institute (ANSI)/American Society of Quality Control (ASQC):

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Application for copies should be addressed to the American Society for Quality Control, P.O. Box 3005, 611 E. Wisconsin Avenue, Milwaukee, WI 53201-4606.)

Compressed Air and Gas Institute:

CAGI-PNEUROP - Test Code for the Measurement of Sound From Pneumatic Equipment

(Application for copies should be addressed to the Compressed Air and Gas Institute, 1300 Sumner Avenue, Cleveland, OH 44115.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Illustrations. Illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of grinders otherwise conforming to this specification.

3.2 First article sample. When specified (see 6.2), a completely fabricated sample shall be subjected to first article testing in accordance with 4.3. The sample shall be a preproduction item or a production item that meets the requirements of this specification. The sample shall be identical with the proposed items and shall have been made by the methods that are to be used in a production of items to fulfill the terms of the contract. Approval of the sample under first article inspection shall not relieve the contractor of the responsibility to furnish equipment in accordance with the requirements of this specification.

3.3 Material. The materials used in the construction of all components shall be capable of completing the examinations and tests specified herein. All components shall be new and unused. Repaired or reconditioned components shall not be acceptable.

3.4 Screw threads. Threaded parts, including screws, bolts, and nuts, shall conform to the applicable requirements of NBS H28.

3.5 Identification markings. Each grinder shall be marked in a permanent and legible manner showing at least the following: the manufacturers' name or registered trade mark, model number, size, and maximum no load speed. The grinder shall also be have the following marking:

CAUTION: USE ONLY WHEELS MARKED AT OR OVER ACTUAL FREE RUNNING RPM-

3.6 Lubrication.

3.6.1 Primary lubrication. Grinders shall be provided with an oil reservoir, either built-in or of the airline lubricator type. When airline type is provided, it shall be installed adjacent to the tool, be compact, and of a design which will not adversely affect operation of the tool under normal work conditions. Capacity of the reservoir shall assure metered lubrication of all moving parts in the air stream, from one filling, for a minimum operating period of 8 hours.

3.6.2 Secondary lubrication. Grinders requiring periodic lubrication of parts, other than those in the air stream, shall be provided with an external means of applying the required lubricant without disassembling the tool.

3.7 Air inlet connection. The air inlet connection shall consist of a well-secured ferrous fitting, threaded with internal American Standard taper pipe threads (NPT) or internal Dryseal American Standard taper pipe threads (NPTF). The air inlet shall be fitted with an air strainer or screen which shall be effective in retaining solid particles in the compressed air supply. The strainer or screen shall be of such design that it can be easily removed for cleaning.

3.8 Bearings. All rotating parts of the grinder shall be provided with commercially available rolling contact bearings. The rotor shaft shall be provided with ball bearings. Needle and roller bearings, which are primarily designed for radial loads, shall not be used in a thrust position. If open type bearings are used, they shall be suitably housed and adequately sealed to prevent leakage of lubricant and entrance of dirt and dust.

3.9 General construction. Grinders shall be of rugged construction so as to withstand, without failure, treatment likely to be encountered under general service conditions. Grinders shall be self-contained, readily accessible for adjustment, or replacement of parts. Parts which require lubrication shall be properly enclosed so as to prevent entrance of foreign particles and leakage of lubricant. Working parts exposed to wear shall be of sufficient hardness to withstand the service required. Parts shall be properly finished by machining or grinding to dimensions within limits established by good commercial practice. Similar parts shall be interchangeable and of good fit when assembled with relative parts of the same size, type, and make. Grinders shall be reliable and effective when operated on compressed air lines between 80 and 100 pounds per square inch gauge (lb/in^2g).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

3.10 Sound pressure levels. The sound pressure levels measured at an unobstructed distance of one meter, shall not exceed the following limits on the A weighted scale in any prescribed microphone location (see 4.9.3).

91 dBA - Type I in sizes 3 inch and smaller.
95 dBA - Types I and II in sizes 4 inch and larger.

3.11 Throttle. The throttle for all grinders shall be of the type specified herein, control the speed of the tool and automatically shut off the air supply when released. Type I, size 2 inch grinders may be equipped with a positive "on-off" throttle.

3.11.1 Safety lock-off throttle. All type I and II, class 2 grinders shall be equipped with a safety lock-off device which shall require two operations by the same hand as used to turn tool on. Lock-off device shall automatically and positively lock throttle in the off position when throttle is released. Lock-off device shall be integral with the tool so it cannot be removed from the tool without modification to the tool, and shall operate in such a manner as to prevent the throttle from starting tool until lock-off device has been actuated.

3.11.2 Dual control throttle. Type II, class 2 grinders may be equipped with dual control throttles in lieu of safety lock-off throttles. Dual control throttles shall be such as to prevent tool start-up until both throttles have been actuated.

3.12 Housing. Housings shall be strong enough to prevent indentation under service conditions. When threaded fasteners are utilized to assemble adjacent housing components, through bolting shall be used in preference to tapped holes. Capscrews, if used, shall engage threads in ferrous housings or ferrous inserts in nonferrous housings by not less than a length equal to the pitch diameter of the fastener thread. Where ferrous inserts are not used in nonferrous housings, capscrews shall engage threads by not less than a length equal to 1-1/2 times the pitch diameter of the fastener thread. All threaded fasteners shall be secured with suitable locking devices.

3.13 Motor. The motor shall be of the rotary vane type. The rotor shall consist of one or more elements accurately balanced with the rotor shaft, and shall be propelled by compressed air through the attendant action of vanes or blades made of suitable composition.

3.14 Spindle arbors. Spindle arbors shall be of the size specified (see Tables I and II) and shall conform to the applicable requirements of ANSI 7.1.

TABLE I. Type I, horizontal grinders, dimensional and weight requirements

Size of Grinder	Maximum Wheel Capacity Inches						Air Inlet Nominal Pipe Size Inch	Standard Spindle Arbor Dia. Inch	Max. weight 1/ Pounds
	Peripheral Grinding Straight Type				Radial Wire Brush Dia.	Buffing Wheel Dia.			
	Hard Organic Bond Dia.	Thickness	Vitrified Bond Dia.	Thickness					
2	2	1/2	1-1/2	1/2	-	-	1/4 or 3/8	38	5
2-1/2	2-1/2	1/2	1-3/4	1/2	-	-	1/4 or 3/8	3/8	5
3	3	1/2	2	1/2	-	-	3/8 or 1/2	5/8	6
4	4	1	3	1	4	-	3/8 or 1/2	5/8	10
6	6	1	4	1	6	6	3/8 or 1/2	5/8	12
8	8	1	5	1	8	8	3/8 or 1/2	5/8	16

1/ Without abrasive wheel, wheel guard, or wheel flanges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

TABLE II. Type II, vertical grinders, dimensional and weight requirements

Size of Grinder	Maximum Capacity Inches					Air Inlet Nominal Pipe Size	Standard Spindle Arbor Thread (UNC Series) in. thd.	Max. Weight 1/ Pounds
	Cup-Type Wheel							
	Resinoid and Rubber Bond	Vitrified Bond	Cup Type Wire Brush	Sand-ing Disk	Dep-ressed Center Abrasive Wheel			
4	4	-	5	5	-	3/8 or 1/2	5/8	8
6 (Standard Duty)	6	4	6	7	7	3/8 or 1/2	5/8	9
6 (Heavy Duty)	6	5	6	9	9	3/8 or 1/2	5/8	12-1/2

1/ Without abrasive wheel, wheel guard, or wheel flanges.

3.15 Speed regulation. Except as specified in 3.17.3, grinders shall be provided with a governor to automatically regulate the speed of the rotor. The governor shall prevent excessive speed when the spindle is free of load and maintain efficient operating speeds under all normal loads applied to the abrasive wheel. In the event of failure of the governor or any of its parts, the spindle shall not maintain dangerously high speeds. At all normal loads, the spindle speed shall be controlled so that there will be no abrupt or erratic variations affecting grinding operations.

3.16 Method of drive. The rotor and abrasive wheel spindle shall be directly coupled, with no intermediate gearing, so that the speed of both is the same.

3.17 Type I, horizontal grinders. Type I grinders shall be similar to Figure 1 and shall conform to the applicable requirements of Tables I and III.

TABLE III. Performance requirements for Types I and II grinders

Size of grinder			At Specified Torque		At No Load
Type I, Horizontal Inches	Type II, Vertical Inches	Specified Torque Ft. lb	Speed Min. rpm	Air Consumption Max. scfm/hp	Speed Max. r/min
2 Style a		0.15	11,000	80	18,500
2 Style b		0.15	11,000	80	18,500
2-1/2 Style a		0.20	9,500	65	15,000
2-1/2 Style b		0.20	9,500	65	15,000
3		0.65	6,000	60	12,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

TABLE III. Performance requirements for Types I and II grinders (cont'd)

Size of grinder			At Specified Torque		At No Load
Type I, Horizontal Inches	Type II, Vertical Inches	Specified Torque Ft. lb	Speed Min. rpm	Air Consumption Max. scfm/hp	Speed Max. r/min
	4	1.5	6,000	50	9,000
4		1.5	6,000	45	9,100
6		2	5,000	45	6,200
	6 (Heavy Duty)	3	3,500	40	4,700
	6 (Standard Duty)	2	4,500	40	6,000
8		3	3,500	40	4,600

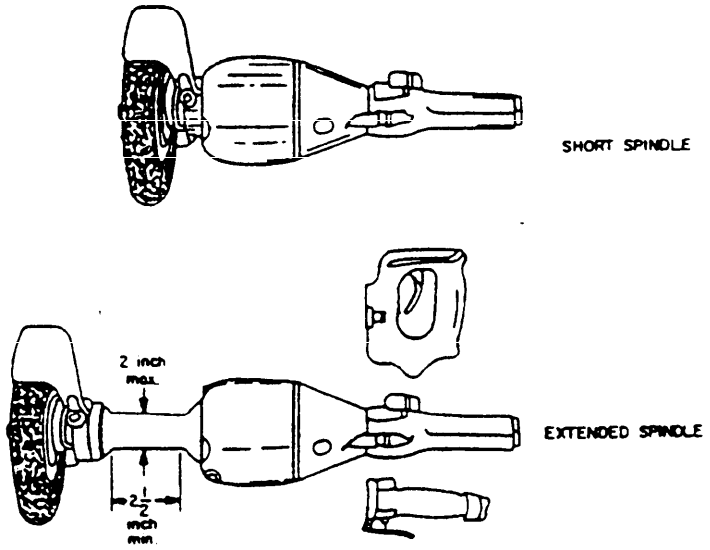


Figure 1. Type I, horizontal grinder.

3.17.1 Style and handles. Size 2 inch and 2-1/2 inch grinders shall be style a or b. Style a grinders shall have an extended spindle enclosed in a metal housing. The outside dimension of the extension housing shall not exceed 2 inches; the length shall be not less than 2 inches and the shape shall be such as to afford a grip for two-hand operation of the tool. Style b grinders shall have a short spindle with the abrasive wheel adapter close-coupled to the body of the grinder and without an intentional extension. Grinder sizes larger than 2-1/2 inches shall be provided with either a straight or spade handle, as specified (see 6.2) and the housing at the spindle end shall be of such shape as to function as a handgrip for two-hand operation of the tool. Grinders with spade handles shall have the throttles located within the grip portion of the handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

3.17.2 Throttle. Throttles shall meet the requirements of 3.11 and be either of the lever or thumb type.

3.17.3 Speed regulation. Grinders shall be equipped with a governor in accordance with 3.15, except that sizes 2- and 2-1/2-inch grinders may be designed to inherently regulate the supply of air to limit the spindle speed at no load. The spindle speed at no load shall be in accordance with the maximum allowable no load speed specified in Table II when supplied with air at 90 lb/in^{2}g (see 4.9.1).

3.18 Type II, vertical grinders. Type II grinders shall be similar to Figure 2 and shall conform to the applicable requirements of Tables II and III.

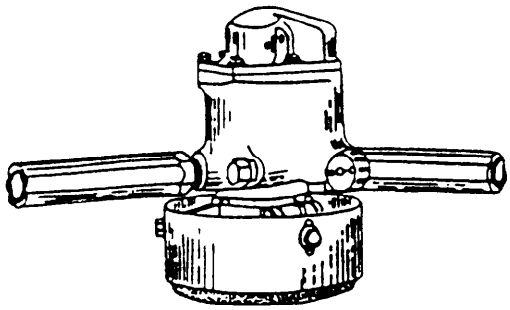


Figure 2. Type II, vertical grinder.

3.18.1 Spindle arbor. Spindles shall be adaptable for use with depressed center abrasive wheels, cup-type wire brushes, and sanding pads.

3.18.2 Handles. Vertical grinders shall have two straight handles whose longitudinal axis shall be parallel to the grinding face of the abrasive wheel. Handles shall be located at such an angle from each other as to facilitate handling and operation of the grinder when in use.

3.18.3 Throttle. Throttle shall meet the requirements of 3.11 and be either of the thumb-flip (butterfly), lever, or sleeve type.

3.19 Accessories or extra equipment. When accessories or extra equipment are required, they shall be as specified (see 6.2).

3.20 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the specification preparing activity for change to this document.

3.21 Workmanship. Details of workmanship shall be in accordance with the best commercial standards and practices. Paints, coatings, platings, and finishes shall be smooth, dry, adherent, continuous, and not stained or discolored. Fasteners shall be firmly secured and show no evidence of deformation, cross threading, or hazardous burrs. Adhesives and lubricants adequate for their intended purpose shall be properly and neatly applied. Adhesives shall be adequately cured. There shall be no interference, binding, or galling of parts. External and bearing surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be clean and free of corrosion and debris (e.g., chips, shavings, slivers) or other foreign material. The item shall be free from manufacturing workmanship defects (e.g., loose, missing, binding or misaligned parts, sharp or rough external edges, corners or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

3.22 Technical manual. One copy of a technical manual consisting of the manufacturer's standard commercial instructions and parts list shall be furnished with each grinder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specification and standards to the extent specified, or, if none, in accordance with this specification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).

4.3 First article inspection. First article inspection shall be applied to the sample submitted in accordance with 3.2. First article inspection shall consist of the examinations specified in 4.6, the tests specified in 4.9, and the test sequence specified in 4.10. Failure of the sample to pass the examinations and tests shall be cause for rejection.

4.4 Quality conformance inspection. Quality conformance inspection shall consist of all the examinations specified in 4.6 and the performance tests specified in 4.9.2.

4.4.1 Inspection lot. An inspection lot shall consist of all the grinders of the same type, style, and size offered at the same time and place for quality conformance inspection.

4.5 Sampling procedures. Unless otherwise specified, sampling for inspection shall be performed in accordance with ANSI/ASQC Z1.4.

4.6 Examination.

4.6.1 Visual examination. The end items shall be examined for the defects listed in Table IV. The lot size shall be expressed in terms of grinders. The inspection level shall be S-4 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for total (major and minor combined) defects.

TABLE IV. Classification of preparation for delivery defects

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling Distortion of container
Contents	Number per container is more or less than required Net weight exceeds requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

4.6.2 Dimensional examination. The end items shall be examined for any nonconformance to dimensional requirements. The lot size shall be expressed in terms of grinders. The sample unit shall be one grinder. The inspection level shall be S-4 and the AQL, expressed in terms of defect per hundred units shall be 4.0 for total (major and minor combined) defects.

4.7 Testing. The end items shall be tested for the characteristics specified in Table IV. The lot size shall be expressed in units of grinders. The sample unit shall be one grinder. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

4.8 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with Table V. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

TABLE V. Classification of defects

Examine	Defect	Critical	Major	Minor
Construction and Workmanship	Arbors, guards, and flanges do not conform to ANSI Safety Code		101	
	Type and size not as specified		102	
	Grinder not readily adjustable or parts not readily replaceable		103	
	Motor not rotary vane type		104	
	Material nonconforming; evidence of unauthorized material used		105	
	Lubricated parts enclosure nonconforming		106	
	Nuts or bolts not secured by a suitable locking device		107	
	Component part missing		108	
	Similar parts not dimensionally and functionally interchangeable		109	
	Air inlet connection not as specified, damaged, or missing		110	
	Air strainer missing or damaged, not readily removable		111	
	Handles not as specified, or damaged		112	
	Throttle nonconforming, damaged, inoperable, or missing		113	
	Spindle not as specified, dimensioning not within specified tolerances		114	
	Rotor nonconforming or damaged		115	
	Bearings not as specified, broken, cracked, or pitted		116	
	Lubrication of grinder not as specified; evidence of oil leakage		117	
	Method of drive nonconforming		118	
	Nameplate nonconforming, illegible, incorrect or missing			201
	Accessories or extra equipment not as specified			202

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:00Z
Check the source to verify that this is the currentversion before use.

4.9 Tests.

4.9.1 Performance test conditions. All tests shall be based on operation of the tools with compressed air at 90 psig measured as close to the tool as practicable. The test tools shall be connected to the air supply by means of a 10-foot length of 5/8-inch inside diameter hose with a coupling conforming to Table VI.

TABLE VI. Coupling requirements

Air inlet connection nominal pipe size (Inch)	Inside diameter of hose coupling (Inch)
1/4	0.250
3/8	0.375
1/2	0.500

4.9.2 Air consumption, speed, and torque. Grinders shall be subjected to a test to determine compliance with the requirements for air consumption, speed, and torque.

4.9.3 Sound pressure level test. Sound pressure levels shall be taken at an unobstructed distance of one meter from the tool, both in the "free running" and "on-load" conditions. The sound pressure level test shall be conducted in accordance with the applicable provisions of the Compressed Air and Gas Institute's CAGI-PNEUROP Test Code for the Measurement of Sound from Pneumatic Equipment, except as modified herein. The acceptable limits shall be as specified in 3.10.

4.9.3.1 Acoustical calibration. The entire instrumentation system shall be calibrated before each test series allowing a minimum instrument warm-up period of 5 minutes if transistorized and 1/2 hour if vacuum tube. Recalibration shall be performed if any instrument adjustment is necessary during progress of the test.

4.9.3.2 Background sound level. The ambient noise level shall be at least 10 decibels (dB) less than the measurement taken with the tool running in all tool and microphone orientations. In addition, the sound produced by the energy absorbing device, used in the "on load" test, must be at least 10 dBA below the machine's own sound output.

4.9.4 Air leakage test. Grinders shall be tested for tightness. Grinders shall be connected to a system consisting of a 0.25 cubic foot air receiver, valving as necessary, and a 0 - 300 lb/in^2 range pressure gauge. System shall be pressurized with air or nitrogen to 150 lb/in^2 with throttle in the closed position and isolated for a period of 15 minutes. At the end of 15 minutes, maximum pressure drop permitted shall be no more than 50 lb/in^2.

4.9.5 Service tests. Grinders shall satisfactorily complete 150 hours of actual work under practical service conditions to determine the ease of operation, general serviceability, and durability of the tool. Failure during the service tests of any components of the tool, exclusive of abrasive wheels, sanding discs, and wire brushes shall be cause for failure of the test. When test under practical service conditions is not feasible, a simulated test may be performed of equal duration by using a life testing machine. Tool shall be loaded to specified torque on a pony brake or other load applying device. Tool shall be cycled on for 20 seconds and off for 10 seconds.

4.9.5.1 Lubrication test. Lubrication system shall be checked to insure conformance with 3.6. This test may be performed concurrently with the service test. Lubricant reservoir shall be inspected periodically to determine adequacy of lubrication system.

4.10 Test sequence. Grinders shall be subjected to the test of 4.9.1 through 4.9.4, followed by the service tests (see 4.9.5), and then again subjected to the test of 4.9.1 through 4.9.4. The tools shall then be disassembled and examined. Any evidence of broken, deformed, or excessively worn components shall be cause for failure

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

4.11 Examination of preparation for delivery. An examination shall be made to determine compliance with the preservation, packaging, packing, and marking in accordance with PPP-P-40.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with PPP-P-40. The level of preservation, packaging, and packing shall be A, B, or Commercial, as specified (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use.

6.1.1 Type I. Type I, horizontal grinders are suitable for grinding with a straight-type, hard, organic bond abrasive wheel, and are suitable for use with radial-type and cup-type wire brushes. The 2- and 2-1/2 inch size grinders are used primarily for close quarter and internal work, such as in grinding the inside of welded pipe flanges, small radii, and corners. The 4-, 6-, and 8-inch size grinders are primarily for grinding rough edges of plates, shapes, and castings.

6.1.2 Type II. Type II, vertical grinders are suitable for grinding and snagging with cup-type or depressed center abrasive wheels, and for use of cup-type brushes and sanding devices.

6.1.3 Maximum sound pressure levels. Maximum sound pressure levels have been set to insure against occupational noise-induced hearing losses. The tools covered by this specification are considered to be used in bursts of 20 minutes duration with 5 minutes off between bursts over and exposure period of 8 hours.

6.1.4 Safety. Class 2 grinders are intended to maximize safety by preventing accidental tool start-up. Class 1 grinders equipped with either sleeve throttles or spade handle with inside level throttles are also considered safe with respect to accidental start-up.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type, class, size, style, if applicable (see 1.2), and handle configuration required (see 1.2.1, 3.17.1, and Tables I and III as applicable.
c. Handles, if different (see 3.17.1).
d. Accessories or extra equipment, when required (see 3.19).
e. Applicable levels of preservation, packaging, and packing required (see 5.1).
f. First article required (see 4.3)
g. Level of preservation, packaging, and packing required (see 5.1).
h. Marking, if other than specified.

MILITARY INTERESTS:

Custodians:

Army - GL
Navy - SH
Air Force - 99

User Activities:

Army - WC
Navy - YD

Preparing Activity:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:00Z
Check the source to verify that this is the current version before use.