OO-G-673B
November 8, 1978
SUPERSEDING
Fed. Spec. OO-G-673A
May 29, 1958
(See 6.4 and 6.7)

FEDERAL SPECIFICATION

GRINDING MACHINE, TOOL ATTACHMENT (PRECISION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers electric motor driven tool attachment precision grinders intended for both external and internal grinding operations when attached directly on the compound slide of a lathe or when properly affixed to other machine tools.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types and sizes. The grinding machines covered by this specification shall be of the following types and sizes, as specified (see 6.2).

Type I:

Size 10 - 3-inch wheel
Size 11 - 4-inch wheel
Size 12 - 5-inch wheel
Size 13 - 6-inch wheel
Size 15 - 8-inch wheel

Type II:

Size 11 - 6-inch wheel
Size 12 - 8-inch wheel

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

FF-B-171 - Bearings, Ball, Annular (General Purpose).
FF-B-187 - Bearings, Roller, Tapered.

Federal Standards:

FED-STD-H28 - Screw-Thread Standards for Federal Services.
FED-STD-123 - Marking for Shipment (Civil Agencies).
FED-STD-356 - Commercial Packaging of Supplies and Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston; New York; Philadelphia; Washington, DC; Atlanta; Chicago; Kansas City, MO; Fort Worth; Houston; Denver; San Francisco; Los Angeles; and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-M-18058 - Machinery, Metal and Woodworking, Support Equipment and Associated Repair Parts, Preparation for Delivery of.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-109 - Quality Assurance Terms and Definitions.
MIL-STD-461 - Electromagnetic Interference Characteristics, Requirements for Equipment.
MIL-STD-1337 - General Suppression System Design Requirement for Portable Electric Hand Tools.

(Copies of Military Specifications, Standards, Drawings, and Publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Laws and Regulations:

Occupational Safety and Health Act (OSHA) of 1970:

Title 29, Code of Federal Regulations, Chapter XVII, Part 1910, and amendments.

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for issuance thereof.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Underwriters' Laboratories (UL):

UL-45 - Standards for Electric Tools.
UL-987 - Stationary and Fixed Electric Tools.

(Application for copies should be addressed to the Underwriters' Laboratories, Inc., 1285 Walt Whitman Road, Melville, Long Island, NY 11749; 207 East Ohio Street, Chicago, IL 60611; or 1655 Scott Boulevard, Santa Clara, CA 95050.)

National Electrical Manufacturers' Association (NEMA):

MG-1 - Motors and Generators.
IC-1 - Industrial Controls.

(Application for copies should be addressed to the National Electrical Manufacturers' Association, 155 East 44th Street, New York, NY 10017.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

American National Standards Instutute (ANSI) Standards:

B7.1 - Safety Code for the Use, Care, and Protection of Abrasive Wheels.
B74.13 - Markings for Identifying Grinding Wheels and Other Bonded Abrasives.

(Application for copies should be addressed to the American National Standards Institute, Dept. 969, 1430 Broadway, New York, NY 10018.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.2 and 6.3).

3.2 General requirements.

3.2.1 Illustrations. The illustrations shown herein are descriptive and not restrictive, and are not intended to preclude the purchase of grinding machines which are otherwise in accordance with this specification.

3.2.2 Design. The grinder shall be new and one of the manufacturer's latest designs. Machine design shall comply with the requirements herein in accordance with the latest state of the art. Each machine shall be capable of grinding work parts to varying finishes and dimensions. The machine design and construction shall include all components, parts, and features necessary to meet the performance requirements specified herein. All parts subject to wear, breakage, or distortion shall be accessible for adjustment, replacement, and repairs.

3.2.3 Controls. The grinder shall be completely wired through the controls. The controls shall conform to NEMA IC-1 and shall be installed in a NEMA type I enclosure.

3.2.4 Safety and health requirements. Grinder design and construction shall conform to applicable requirements of Subpart J, General Environmental Controls; Subpart O, Machinery and Machine Guarding; and Subpart S, Electrical; of 29 CFR 1910, Occupational Safety and Health Standards. All guards shall be removable to provide easy access to guarded parts. Additional safety and health requirements shall be as specified by the procuring agency (see 6.2 and 6.5).

3.2.5 Lubrication. All bearings (except sealed-for life-type) shall be provided with accessible means of lubrication. All oil holes shall have filler caps of the self-closing type to prevent grit or dust from entering. Bearing lubricant shall not deteriorate in the presence of moisture, and shall be suitable at the operating shaft speed.

3.2.6 Interchangeability. To provide for replacement of worn parts, all parts bearing the same part number shall be functionally interchangeable, and shall be dimensionally identical within the manufacturing tolerance limits in use by their manufacturer.

3.2.7 Construction. The grinder shall be so constructed that when installed and connected to power, it shall be ready for operation. The grinder shall be constructed of parts which are without defects and free of repair. The structure shall be capable of withstanding all forces encountered during operation of the grinder to its maximum rating and capacity without permanent distortion.

3.2.8 Castings and forgings. All castings and forgings shall be substantially free from blowholes, porosity, hard spots, shrinkage defects, cracks, or other injurious defects. In no event shall such processes as welding, peening or plugging be used on castings or forgings for reclaiming any part of the machine without the authorization of the procuring activity.

3.2.9 Welding, brazing, or soldering. Welding, brazing, or soldering shall be employed only where specified in the original design. None of these operations shall be employed as a repair measure for any defective part.

3.2.10 Fastening devices. All screws, pins, bolts, and similar parts shall be installed in such a manner as to prevent change of tightness. Those subject to removal or adjustment shall not be swaged, peened, staked, or otherwise permanently deformed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

3.2.11 Surfaces. All surfaces of castings, forgings, molded parts, stampings and welded parts shall be clean and free from sand, dirt, fins, sprues, flash, scale, flux and other harmful or extraneous materials. All edges shall be either rounded or beveled unless sharpness is required to perform a necessary function. Except as otherwise specified herein, the condition and finish of all surfaces shall be commensurate with the manufacturer's standard commercial practice.

3.2.12 Painting. Unless otherwise specified (see 6.2), the machine shall be painted in accordance with the manufacturer's standard commercial practice.

3.2.13 Threads. All threaded parts shall conform to Fed. Std. No. H28.

3.3 Detail requirements.

3.3.1 Base. The base of the grinding machine shall be of metallic composition, fabricated or cast of iron, steel or aluminum, arranged to support the grinding wheel assembly and all other associated components of the machine. The ON-OFF switch shall be housed in the base convenient to the operator. Means for anchoring the base shall be provided. Base dimensional characteristics shall be manufacturer's standard.

3.3.2 Grinding wheel assembly. The grinding wheel assembly shall include the work spindle and its related components, spindle housing, drive mechanism, and grinding wheels and wheel flanges. Each work spindle shall be of high quality steel with a minimum tensile strength of 90,000 pounds per square inch (lb/in^2) and a minimum hardness of 24 Rockwell "C". Each work spindle shall be mounted on ball or tapered roller bearings and shall be accurately machined so radial runout does not exceed .0001 inch total indicator reading (TIR). Spindles and motor bearings shall be protected from dirt, swarf, coolant and other foreign matter by seals or shields. Shafts shall operate in lubricated-for-life-type bearings, installed with means for minimizing end play. Motor control shall be through a switch having two marked positions: ON and OFF. Means for securing the wheels and wheel flanges to the work spindle shall be provided.

3.3.3 Bearings. The bearing installation of the grinder shall be adequate to obtain a grinding precision of 0.0005 to 0.0001 inch, and a surface finish of 10 micro-inches. The bearing installation shall allow no longitudinal travel of the grinding wheel assembly. The design shall minimize any tendency to preload the bearings due to thermal expansion of the shaft. Bearing preloads shall be reduced to the minimum. Bearings shall be in accordance with FF-B-171 and FF-B-187.

3.3.4 Sizes and capacities. Types I and II grinders shall meet the size and capacity requirements of table I.

TABLE I. Sizes and capacities.

	Type I					Type II	
Requirement	Size 10	Size 11	Size 12	Size 13	Size 15	Size 11	Size 12
Horsepower	1/4	1/3	1/2	3/4	1	1/4	1/2
Minimum spindle speed, RPM (no load) 1/	6000	5000	4200	4000	2600	3000	3000
Maximum spindle speed, RPM (no load) 1/	40000	45000	45000	30000	28000	4000	4000
Grinding wheel diameter, maximum inches: External	3	4	5	6	8	6	8
Internal	1-1/4	1-1/4	1-1/2	1-3/4	2-1/2	1-1/2	2
Tool post shank size	---	---	---	---	---	5/8-inch by 1-1/8 inches	3/4-inch by 1-1/2 inches

1/ Minimum and maximum spindle RPM represent rated no load only. Maximum safe operating speeds for all grinding wheels are specifically outlined in ANSI B7.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

3.3.5 Motor and electrical system. Unless otherwise specified (see 6.2), the motor and the electrical system shall conform to the applicable standards of the National Electrical Manufacturers' Association, and Underwriters' Laboratories, Incorporated.

3.3.6 Motor nameplate. Each motor shall be equipped with the motor manufacturer's nameplate bearing the motor manufacturer's name, the motor model number, the serial number, rated horsepower, speed in revolutions per minute (RPM), and the motor electrical characteristics. With the motor mounted on the machine, the nameplate shall be easily visible without removing or turning the motor.

3.3.7 Motor horsepower. Unless otherwise specified (see 6.2), the motor horsepower for each grinder shall be of the rating specified in table I.

3.3.8 Power supply. Power supply characteristics shall be as specified (see 6.2).

3.3.9 Starting mechanism. Each grinder shall have a switch of the proper capacity to control the motor used. The switch case shall be of suitable insulating material, or of metal suitably insulated from current carrying parts and effectively grounded. Each motor of over 1 horsepower, and each motor rated at more than 230 volts, shall be, controlled by a pushbutton and magnetic starter having overload and low voltage protection; each motor of 1 horsepower or less, and rated at 230 volts or less shall have a built-in switch and overload protection. The switch shall be located convenient to the operator. Direct current motors of 1-horsepower shall be provided with time limit acceleration and shunt field failure protection. Fractional horsepower d.c. motors shall be provided with overload switch. When specified (see 6.2), the machines shall be provided with dustproof switch.

3.3.10 Cable and plug. Each machine using a single-phase a.c. or d.c. motor shall be furnished with not less than 6 feet of 3-conductor type cable or 6 feet of 2-pole, 3-wire grounding type, 15-ampere, 125-volt cable. Each machine using 3-phase, 220-volt, a.c. motor shall be provided with a junction box enclosing 4 terminals (one grounded to machine frame). Terminals shall be of a size sufficient to carry continuously full rated current. The three-prong polarized connector plug shall be provided with mating three to two parallel prong adapter with grounding lead for use with a two-wire outlet.

3.4 Electromagnetic interference control. When specified (see 6.2), equipment procured under this specification shall comply, as applicable, with class IIB equipment of MIL-STD-461, or with MIL-STD-1337.

3.5 Wheels. Unless otherwise specified (see 6.2), grinding wheels shall be general purpose, vitrified, bonded, and in accordance with ANSI B7.1 and B74.13.

3.6 Wheel guards and flange collars. Each grinder shall be provided with a metal wheel guard, and meet design, dimension, and wheel size requirements in accordance with ANSI B7.1. Flange metal wheel collars shall be further provided for the applicable spindle and also be in accordance with ANSI B7.1.

3.7 Nameplate. A permanently affixed metal nameplate shall be provided on each grinder, furnishing the following information:

(a) Manufacturer's name or trademark.
(b) Model and serial number.
(c) Minimum and maximum wheel size.

3.8 Instruction handbook. A copy of the manufacturer's handbook of instructions for machine operation, care, and maintenance and machine parts list shall be furnished.

3.9 Carrying case. Unless otherwise specified (see 6.2), each grinder shall be provided with a metal carrying case of substantial construction to securely contain the grinding machine and provided standard equipment.

3.10 Standard equipment. Unless otherwise specified (see 6.2), each grinder shall be provided with standard equipment as specified in tables II and III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

TABLE II. Standard equipment for type I grinding machines.

Item	Grinding machine size				
	10	11	12	13	15
Chuck assembly, 1/8 inch	1	1			
Wheel arbor	1	1			
Flanges, wheel 1/					
T-bolt	1	1	1	1	1
Diamond dresser, C-clamp type	1	1	1	1	1
Wrench set	1	1	1	1	1
Standard grinding wheels:					
3/4 by 1/4 by 1/4 inch			1	1	
1 by 1/4 by 1/4 inch			1	1	
1-1/4 by 1/4 by 1/4 inches	1	2			
1-1/2 by 1/4 by 1/4 inches			1	1	
2 by 3/8 by 3/8 inches			1		
3 by 3/8 by 3/8 inches	1	2			
3 by 1/2 by 3/8 inches			1	1	
3 by 3/4 by 1/2 inches					1
4 by 1/2 by 3/8 inches		1	1	1	
5 by 1/2 by 3/8 inches			1	1	
6 by 3/4 by 1/2 inches				1	1
8 by 3/4 by 3/4 inches					1
Mounted wheels:					
1/4 by 1/4 by 1/8 inch	1	2	1	1	
1/2 by 1/4 by 1/8 inch	1	2			
5/8 by 3/8 by 1/8 inch			1	1	
3/4 by 1/4 by 1/8 inch	1	2			
3/4 by 1/2 by 1/4 inch			1	1	
1-1/4 by 1/4 by 1/4 inches			1	1	

1/ See 3.6.

TABLE III. Standard equipment for type II grinding machines.

Equipment	Size no. 11	Size no. 12
Removable tool post shank or bar	X	X
Spindle attachment, 4 inches long	X	
Spindle attachment, 6 inches long		X
Standard grinding wheels:		
1-1/2 by 3/8 inches	X	
2 by 1/2 by 1/2 inches		X
6 by 3/8 by 1/2 inches	X	
8 by 3/4 by 5/8 inches		X

3.11 Optional equipment. When specified (see 6.2), each type I grinder shall be provided with optional equipment, as specified in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

TABLE IV. Optional equipment for type I grinding machines.

Item	Grinding machine size				
	10	11	12	13	15
Spindle assembly, with external grinding arbor		X	X	X	X
Spindle assembly, with 1/4-inch chuck			X	X	
Spindle assembly, with 1/8-inch chuck		X			
Spindle assembly, for 24-inch depth internal grinding					X
Spindle assembly, for 20-inch depth internal grinding					X
Spindle assembly, for 16-inch depth internal grinding				X	X
Spindle assembly, for 15-inch depth internal grinding			X	X	
Spindle assembly, for 13-inch depth internal grinding			X	X	
Spindle assembly, for 10-inch depth internal grinding			X	X	
Spindle assembly, for 9-inch depth internal grinding			X	X	
Spindle assembly, for 8-inch depth internal grinding			X	X	X
Spindle assembly, for 6-inch depth internal grinding			X	X	
Spindle assembly, for 5-inch depth internal grinding			X	X	
Spindle assembly, for 3-inch depth internal grinding			X	X	
Spindle assembly, for 2-inch depth internal grinding		X	X	X	
Spindle, 6-inch internal extension		X	X	X	
Spindle, 5-inch internal extension		X	X	X	
Spindle, 4-inch internal extension		X	X	X	
Spindle, 3-inch internal extension		X	X	X	
Spindle, 1-5/8-inch internal extension		X	X	X	
Spindle, 1/4-inch chuck extension		X	X	X	

3.12 Workmanship. Workmanship of the grinder shall be such that the machine shall be free of defects which may adversely affect the operation efficiency, serviceability, and life expectancy of the machine.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection. First article inspection shall consist of examination for compliance with the applicable requirements in 3.3 through 3.12, examination to insure compliance with the additional safety and health requirements specified by the procuring activity, and all tests in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

4.3 Inspection for acceptance. Each machine shall be examined in accordance with 4.3.2 and tested in accordance with 4.4.1. Unless otherwise specified (see 6.2), additional inspection shall be made in accordance with the provisions set forth in MIL-STD-105, as specified in 4.3.3 and 4.3.4. The inspection terms and definitions shall be interpreted in accordance with MIL-STD-109. Results shall be kept available for review by Government inspectors.

4.3.1 Inspection of materials and components. The contractor shall ascertain that components and materials used were manufactured, tested, and inspected to insure that machines can be produced in accordance with the requirements of this specification.

4.3.2 Examination for safety and health requirements. Each machine shall be examined to insure compliance with 3.2.4 and the additional safety and health requirements specified by the procuring activity (see 6.2 and 6.5). Each machine shall comply with all such requirements.

4.3.3 Examination of size and capacity. Examination shall be made of each end item in the sample to determine compliance with the requirements of table I. Any characteristic which does not comply with table I shall be classified as a defect. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 defects per hundred units.

4.3.4 End product visual examination. Each completely assembled end item in the sample shall be examined for defects in finish, material, construction, and workmanship and marking. Defects shall be classified as outlined in table V for recording of inspection results and corrective action. Inspection level shall be S-2 with an AQL of 4.0 defects per hundred units for major defects, and 6.5 defects per hundred units for minor defects.

TABLE V. Classification of defects.

Category	Defects
Major	AQL 4 percent defective.
101	Grinding machine not of type or size specified.
102	Component parts missing, damaged, defective or not as specified.
103	Motor, electrical assembly or starting mechanism defective.
104	Voltage and current not as specified.
105	Proof of successful EMI suppression test data not provided or waiver (as applicable to motor type, i.e., universal, induction, etc.).
106	General evidence of poor workmanship.
Minor	AQL 6.5 percent defective.
201	Motor nameplate missing or not as specified.
202	Manufacturer's nameplate missing or not as specified.
203	Wheel guard or flange collars missing.
204	Carrying case not as specified.
205	Technical data missing or not as specified.

4.4 Tests.

4.4.1 Operational test. Each machine shall be operated at no load for not less than 15 minutes, including at least three starts. Proper operation of all controls, motors, adjusting mechanisms and other accessories shall be proved during the trial period. The machine shall accomplish each start properly, and shall run smoothly without excessive vibration.

4.4.2 Electromagnetic interference control tests. When electromagnetic interference control is required, the first article shall be tested for compliance with 3.4 in accordance with table II of MIL-STD-461 or MIL-STD-1337, whichever is applicable.

4.5 Inspection of preparation for delivery. Sample packages and packs and the inspection of the preservation-packaging, packing and marking for shipment and storage shall be in accordance with the requirements of section 5 and the documents specified therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation-packaging and packing. Preservation-packaging shall be level A or C, packing level A, B, or C as specified (see 6.2) in accordance with MIL-M-18058. Commercial preservation-packaging, packing, and marking shall be as specified herein.

5.2 Commercial packaging (preservation-packaging and marking). Unless otherwise specified (see 6.2), commercial packaging and marking shall conform to FED-STD-356. Procuring activities shall specify what options are required under FED-STD-356 (see 6.2.1).

5.3 Cushioning, dunnage, and wrapping materials.

5.3.1 Level A preservation-packaging and levels A and B packing. Use of all types of loose-fill materials for packaging and packing applications such as cushioning, filler or dunnage is prohibited for materials destined for shipboard installation/stowage.

5.3.2 Level C preservation-packaging and packing. When loose fill type materials are used for packaging and packing applications such as cushioning, filler and dunnage, all containers (unit, intermediate and shipping) shall be marked or labelled with the following information.

"CAUTION

Contents cushioned etc., with loose-fill material. Not to be taken aboard ship. Remove and discard loose-fill material before shipboard stowage. If required, recushion with cellulosic material, bound fiber, fiberboard or transparent flexible cellular material."

5.3.3 Cushioning, filler, dunnage and wrapping materials selected whenever available, shall exhibit improved performance for resistance to fire.

5.4 Marking.

5.4.1 Civil agencies. In addition to the markings required by the contract (see 6.2), marking shall be in accordance with FED-STD-123.

5.4.2 Military agencies. In addition to any special marking required (see 6.2), interior packages and exterior shipping containers for levels A, B, and C shall be marked in accordance with MIL-M-18058.

6. NOTES

6.1 Intended use. The grinding machines covered by this specification are for metal working operations requiring precision external and internal grinding.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and size required (see 1.2.1).
(c) First article approval, if required (see 3.1 and 6.3).
(d) Additional safety and health requirements (see 3.2.4, 4.3.2, and 6.5).
(e) Painting, if other than specified (see 3.2.12).
(f) Motor and electrical system, if other than specified (see 3.3.5).
(g) Motor horsepower, if other than specified (see 3.3.7).
(h) Power supply (see 3.3.8).
(i) Dustproof starting switch, if required (see 3.3.9).
(j) Electromagnetic interference control, if required (see 3.4).
(k) Grinding wheels, if other than specified (see 3.5).
(l) Carrying case, if other than specified (see 3.9).
(m) Standard equipment, if other than specified (see 3.10).
(n) Optional equipment, if other than specified (see 3.11).
(o) Inspection for acceptance, if other than specified (see 4.3).
(p) Levels of preservation-packaging and packing required (see 5.1).
(q) Commercial packing options required (see 5.2).
(r) Special markings required (see 5.4.1 and 5.4.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

6.3 First article inspection.

6.3.1 Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

6.4 Changes in classification. The following changes in classification from the superseded documents have been made:

(a) Type III grinding machines are now classified as type I grinding machines.
(b) Type IV grinding machines have been deleted from this specification as they are no longer required.

6.5 Occupational Safety and Health Act (OSHA). Paragraph 3.2.4 requires compliance only with OSHA requirements concerning the machine itself. These requirements include, but are not limited to, the following sections of the OSHA Standards:

29 CFR 1910.144 - Safety Color Code for Marking Physical Hazards.
29 CFR 1910.212 - General Requirements for all Machines.
29 CFR 1910.215 - Abrasive Wheel Machinery.
29 CFR 1910.219 - Mechanical Power Transmission Apparatus.
29 CFR 1910.309 - National Electric Code.

Since this specification does not address compliance with OSHA requirements pertaining to the operating environment, procuring agencies must insert any additional requirements under 6.2 which will insure integration of the new machine into the work environment without exceeding OSHA hazard level limits. OSHA standards applicable to this specification, which are pertinent to the operating environment are:

29 CFR 1910.95 - Occupational Noise Exposure.
29 CFR 1910.1000 - Air Contaminants.

The above sections are cited to assist procuring agencies in complying with OSHA requirements. The machine user should measure and evaluate his safety requirements based on the entire contents of the OSHA standards.

6.6 Sub-contracted material and parts. The preparation for delivery requirements of referenced documents listed in Section 2 do not apply when material and parts are procured by the contractor for incorporation into the equipment and lose their separate identity when the equipment is shipped.

6.7 Changes from previous issue. The symbol "#" is not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Military Custodians:
Army - AL
Navy - SH
Air Force - 99
Review activities:
Navy - YD
DSA - GS
User activities:
Navy - MC

Preparing activity:
Navy - SH
(Project 3460-0077)

Civil Agency Coordinating Activities:
DOT-FHW
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

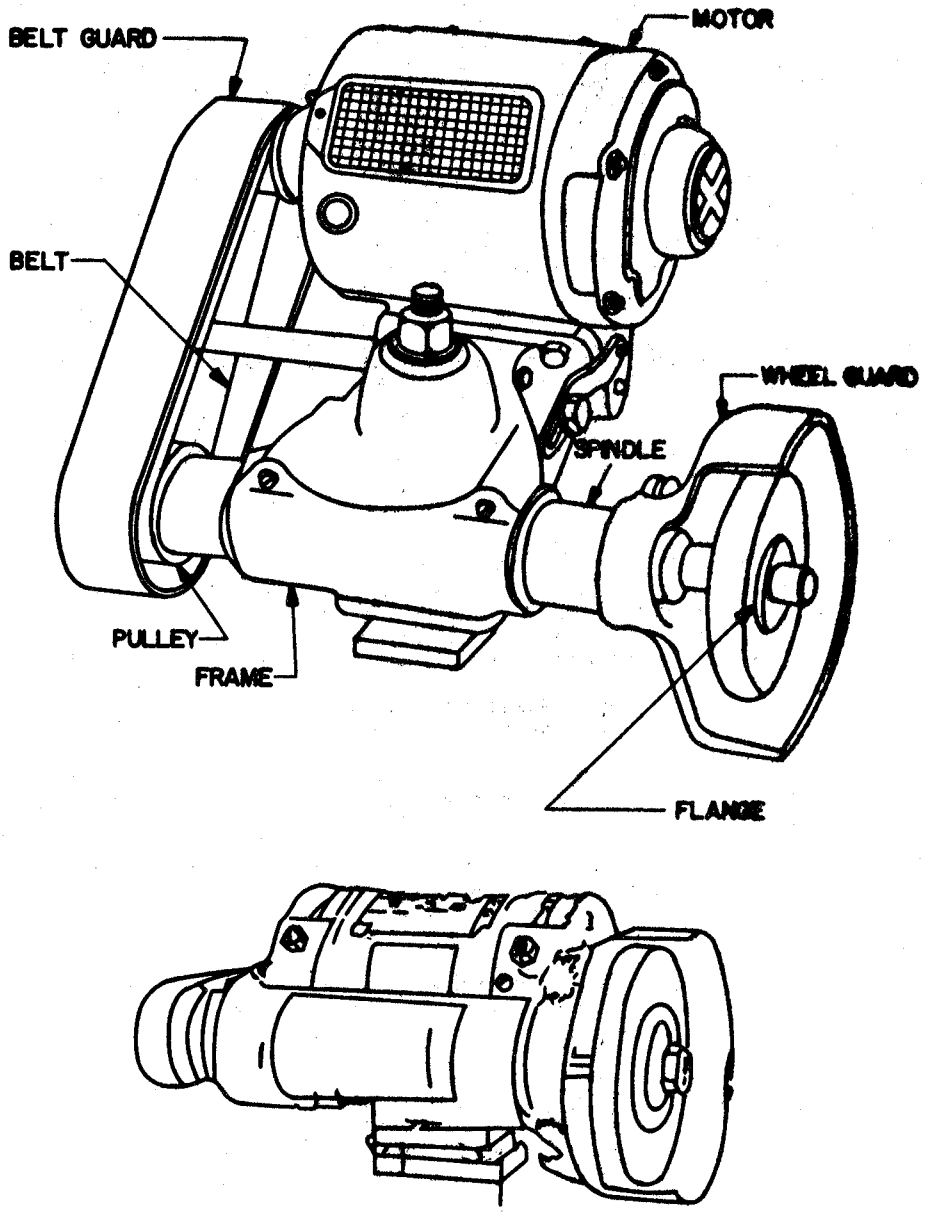


FIGURE 1. Type I grinding machines.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

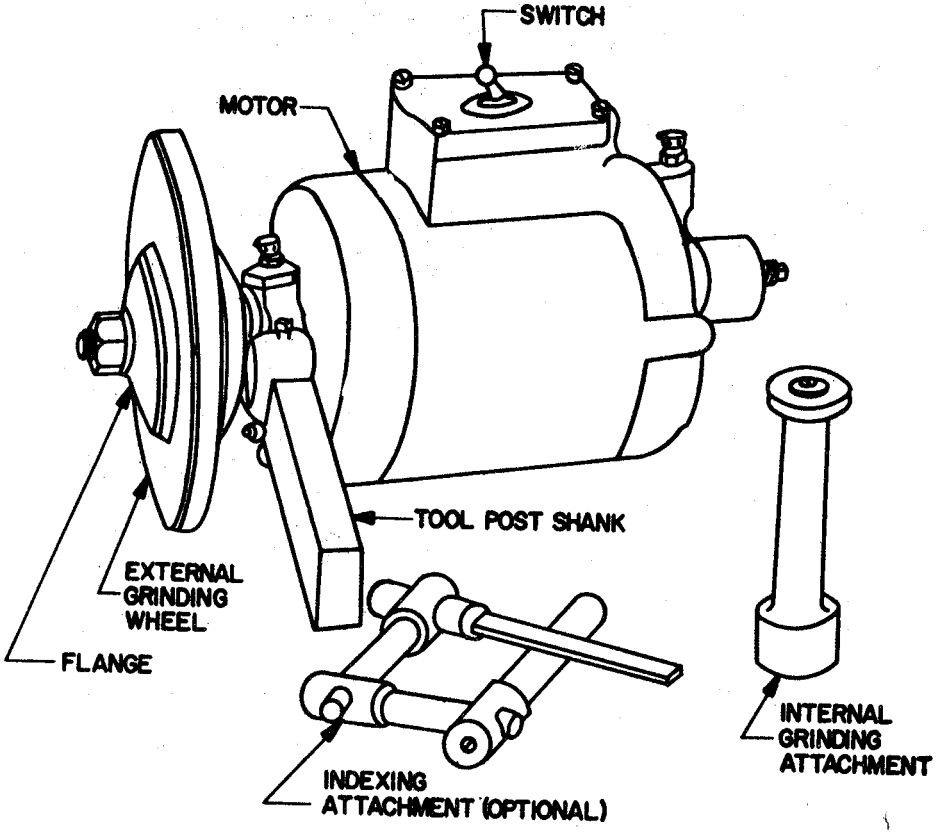


FIGURE 2. Type II grinding machine (wheel guard not shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.