CO-P-660D
January 16, 1969
SUPERSEDING
Int. Fed. Spec. CO-P-00660C(GSA-FSS)
January 8, 1965 and
MIL-P-12092A (SIG C)
February 11, 1957

FEDERAL SPECIFICATION

PRESSES, LAMINATING, PROTECTIVE COVERING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers portable laminating presses intended for office, photographic laboratory and print shop use.

1.2 Classification.

1.2.1 Types, classes, styles, and sizes. The laminating presses covered by this specification shall be of the following types, classes, styles, and sizes, as specified (see 6.2):

Type I - With platens.
  Size 1 - One identification card, platen limits.
  Size 2 - Two identification cards, platen limits.

Type II - With rollers.
  Class 1 - Hot process.
    Style A - Heating rollers only.
      Size 4 - Throat width 4 inches, minimum.
      Size 11 - Throat width 11 inches, minimum.
      Size 17 - Throat width 17 inches, minimum.
    Style B - Heating rollers and driven pull rollers and forced air cooling.
      Size 4 - Throat width 4 inches, minimum.
  Class 2 - Cold process.
    Size 10 - Throat width 10 inches, minimum.
    Size 20 - Throat width 20 inches, minimum.

2. APPLICABLE DOCUMENTS

2.1 Specification and standards. The following specifications and standard of the issues in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

GG-T-678 - Trimmer, Photographic, Hand, Portable.
UU-T-81 - Tags, Shipping and Stock.
PPP-B-566 - Boxes, Folding and Paperboard.
PPP-B-585 - Boxes, Wood, Wire-bound.
PPP-B-591 - Boxes, Fiberboard, Wood-cleated.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-676 - Boxes, Setup.
PPP-F-320 - Fiberboard; Corrugated and Solid Sheet Stock (Container Grade), and Cut Shapes.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

Specifications and Standards and at the prices indicated in the Index. The Index, which includes cummulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Ft. Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.)

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:
MIL-P-116 - Preservation, Methods of.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U. S. Military Property.
MIL-STD-170 - Moisture Resistance Test Cycle for Ground Signal and Electronic Test Equipment.
MIL-STD-461 - Electromagnetic Interference Characteristics Requirements for Equipment.
MIL-STD-462 - Electromagnetic Interference Characteristics, Measurement of.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids, or request for proposal shall apply:

Underwriters' Laboratories, Incorporated, (UL) Standard:
No. 114 - Office Appliances and Business Equipment.

(Application for copies should be addressed to the Underwriters' Laboratories, Incorporated, 207 East Ohio Street, Chicago, Illinois 60611; 1285 Walt Whitman Road, Melville, Long Island, New York 11746; or 1655 Scott Boulevard, Santa Clara, California 95050.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Conformance to standards of Underwriters' Laboratories, Incorporated (UL). The contractor shall submit to the contracting agency proof that the laminating presses he proposes to supply under this specification conform to the requirements of UL No. 114 for cord connected appliances. The label, or listing with re-examination, of UL may be accepted as evidence that the laminating presses conform to these requirements. In lieu of the label, or listing, the contractor may submit independent proof, satisfactory to the contracting agency, that the laminating presses conform to the applicable requirement of the published standards, including methods of test of UL No. 114.

3.1.1 Contractor compliance. Compliance with the preliminary requirements of 3.1 does not absolve the contractor from complete compliance with the other requirements of this specification in order to secure acceptance of his laminating presses.

3.2 Preproduction sample. When specified (see 6.2), a complete laminating press of the type which the contractor proposes to deliver shall be submitted or made available to the contracting officer or his authorized representative for approval. When the preproduction sample is approved, it shall be retained by the contractor as a sample for subsequent production on the contract. This sample may be included in the quantity required for last shipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

3.3 Standard product. Each laminated press furnished under this specification shall be a currently standard product of an established manufacturer except for any deviations from the manufacturer's standard product that are required by this specification. All accessories and components normally furnished commercially with the standard product offered under this specification, shall be in the same quantity and of the same quality as furnished commercially with the standard product for the production of not less than 10,000 laminated I. D. cards, exclusive of plastic film and I. D. cards.

3.4 Illustrations. The illustrations shown herein are for the purpose of identification and are not intended to preclude the procurement of laminating presses which otherwise meet the requirements of this specification.

3.5 Materials. The materials used shall conform to the applicable specifications and requirements specified hereinafter. When materials are not definitely specified, they shall be of the quality normally used for the purpose in commercial practice.

3.6 Construction. Each laminating press shall be complete, ready to operate, reliable in operation, and constructed so as to be readily disassembled for inspection, adjustment, and replacement of parts. Each part of the press shall be interchangeable with the corresponding part of any other press of the same model made by the same manufacturer.

3.6.1 Finish and color. Unless otherwise specified (see 6.2), the presses shall be finished according to the manufacturer's standard practice.

3.6.2 Cooling. Laminating presses equipped with means of cooling shall be air cooled. Water cooled presses and presses requiring water connections are not covered by this specification.

3.6.3 Portability. Each laminating press shall be a complete unit that can be moved from one place to another. The press shall not scratch or mar desk or table tops when placed or slid thereon nor shall it transmit heat to the extent of affecting the finish of desk or table tops. The press shall weigh not more than 100 pounds.

3.6.4 Lubrication. The laminating presses, including motors shall be equipped with permanently lubricated sealed bearings or be equipped with readily accessible means of lubrication.

3.7 Electrical requirements.

3.7.1 Power supply. Unless otherwise specified (see 6.2), the laminating press shall operate from a nominal 120 volt, 60 cycle, single phase, power supply.

3.7.2 Wiring. All wiring, cord, plug, and grounding shall be in accordance with UL No. 114. Unless otherwise specified (see 6.2), the cord shall have a grounding attachment plug and a minimum free length of 6 feet, measured from the point of entry into the press.

3.8 Operational requirements. The laminating presses shall be capable of continuous operation for periods of not less than 8 hours. The presses shall be capable of laminating on both sides, varying thickness of documents from thin onion skin paper to 1/32-inch thick cardboard including cards with embossed letters, seals, or various designs. Elements supplying heat to the heating media shall be so designed and constructed as to insure even heat distribution over the entire heating surfaces.

3.9 Detail requirements.

3.9.1 Type I laminating presses. Type I laminating presses shall be equipped with platens which shall apply pressure and heat to lamination sandwiches. Unless otherwise specified (see 6.2), the laminating pressure shall be either manually or automatically applied and the heating and cooling portions of the laminating cycle shall be initiated and completed manually or automatically in response to the setting of the laminating cycle controls. A suitable light or lights or other device shall indicate the beginning and completion of the laminating cycle. At the option of the manufacturer, the presses may employ multiple sandwiching, separate cooling stations, or other methods which may aid in producing the specified quantity of laminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

3.9.1.1 Size 1. The type I, size 1 laminating press (fig. 1) shall have platen limits of such dimensions as to permit laminating identification cards, photographs, or other articles that are 2-5/16 by 3-1/2 inches plus a margin of 3/32-inch of plastic on all sides of the lamination after trimming. The press shall be capable of producing at least 30 laminated articles per hour with 0.010-inch thick plastic applied to both sides.

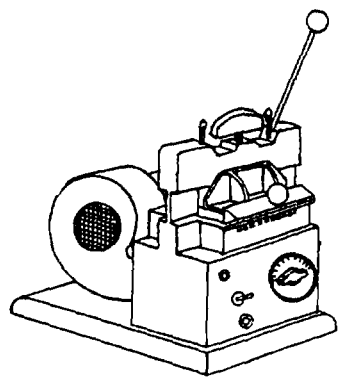


FIGURE 1. Type I, size 1, laminating press with platens, one identification card platen limit.

3.9.1.2 Size 2. The type I, size 2 laminating press (fig. 2) shall have platen limits of such dimensions as to permit laminating two identification cards, photographs, or other articles that are each 2-5/16 by 3-1/2 inches plus a margin of 3/32-inch of plastic on all sides of each lamination after trimming. The press shall be capable of producing at least 60 laminated articles per hour with 0.010-inch thick plastic applied to both sides.

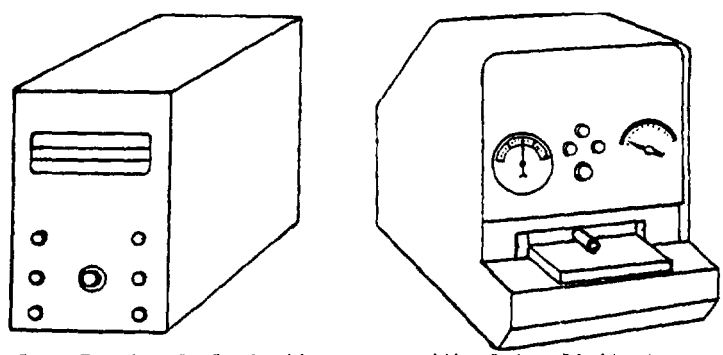


FIGURE 2. Type I, size 2, laminating press with platen limits to accommodate two identification cards.

3.9.2 Type II, class 1, style A laminating presses. Type II, class 1, style A laminating presses shall be equipped with rollers which shall draw the plastic strips through the press and apply pressure and heat to the plastic to form the laminations. The peripheral surface of the rollers shall be either metal or rubber and shall not be adversely affected by the applied pressure and heat. The rolls of plastic film mounted on the press shall not become heated to the extent of affecting the serviceability of the plastic. The presses shall accommodate various width rolls of plastic film from 2 inches up to the capacity size of the press.

3.9.2.1 Size 4. The type II, class 1, style A, size 4 laminating press (fig. 3) shall have a throat opening to permit the use of plastic film at least 4 inches in width. The press shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

be capable of laminating not less than 500 2-5/16 by 3-1/2-inch identification cards, photographs, or other articles per hour with 0.005-inch thick plastic film applied on both sides of the article. The press shall be capable of holding 2 rolls of plastic film 0.005 inch thick with each roll containing at least 100 feet of film.

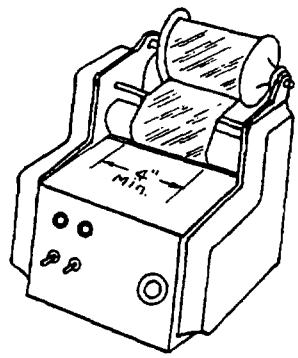


FIGURE 3. Type II, class 1, style A, size 4 laminating press with rollers, throat width 4 inches minimum.

3.9.2.2 Size 11. The type II, class 1, style A, size 11 laminating press (fig. 4) shall have a throat opening to permit the use of plastic film at least 11 inches in width. The press shall be capable of laminating 500 8-1/2 by 11-inch documents or other articles per hour with 0.0011-inch thick plastic film applied on both sides of the article. The press shall be capable of holding 2 rolls of plastic film 0.0011 inch thick with each roll containing at least 500 feet of film.




FIGURE 4. Type II, class 1, style A, size 11 laminating press, with rollers, throat width 11 inches minimum.

3.9.2.3 Size 17. The type II, class 1, style A, size 17 laminating press (fig. 5) shall have a throat opening to permit the use of plastic film at least 17 inches in width. The press shall be capable of laminating 500 8-1/2 by 16-1/2-inch documents or other articles per hour with 0.0011-inch thick plastic film applied on both sides of the article. The press shall be capable of holding 2 rolls of plastic film 0.0011-inch thick with each roll containing at least 500 feet of film.

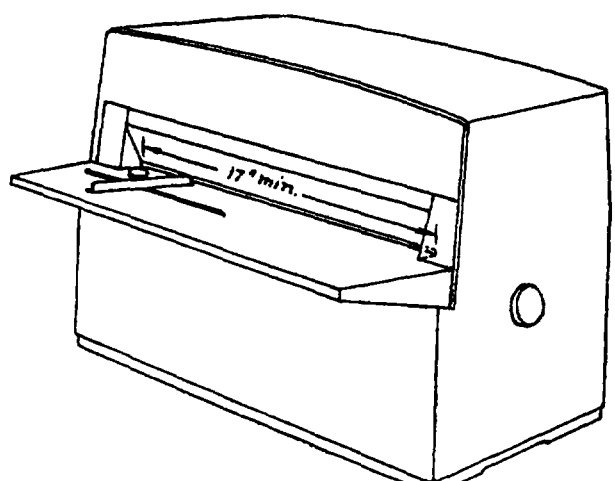


FIGURE 5. Type II, class 1, style A, size 17 laminating press with rollers, throat width 17 inches minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

3.9.3 Type II, class 1, style B laminating press. The type II, class 1, style B laminating press shall be similar to the type II, class 1, style A press (see 3.9.2) with the addition of unheated driven pull rolls and forced air cooling. The strip containing the laminations shall pass between the pull rolls which shall maintain a predetermined tension on the strip emerging from between the hot laminating rolls. The press shall be equipped with a suitable fan or blower which shall direct a steady stream of air on the strip of laminations after its emergence from between the hot rolls.

3.9.3.1 Size 4. The type II, class 1, style B, size 4 laminating press shall have a throat opening to permit the use of plastic film at least 4-1/2 inches in width. The press shall be capable of laminating identification cards, photographs, or other articles at the rate of 1,000 per hour with the plastic applied on both sides of each article.

3.9.4 Type II, class 2 laminating press. The type II, class 2 laminating press known as the cold process press shall be equipped with unheated rollers which shall draw pressure sensitive plastic through the press and apply pressure to the plastic to form the laminations. The pressure between the rollers shall be automatically self-compensating to provide for variations in thickness in the material being laminated. The peripheral speed of the rollers shall be from 1 to 2 inches per second. The press shall be capable of laminating articles on both sides in a single pass.

3.9.4.1 Size 10. The type II, class 2, size 10 laminating press shall have a throat opening to permit the use of plastic film at least 10-1/2 inches in width.

3.9.4.2 Size 20. The type II, class 2, size 20 laminating press shall have a throat opening to permit the use of plastic film at least 20 inches in width.

3.10 Laminations.

3.10.1 Hot process laminations. Articles laminated by the hot process presses, type I and type II, class 1 shall be fused to the plastic film. Fusion shall be complete and uniform over the entire surface of the laminated article. When the lamination is a sandwich and has a margin of plastic around the laminated articles, the two plastic films shall be fused together.

3.10.2 Cold process laminations. Articles laminated by the cold process press, type II, class 2, shall adhere to the pressure sensitive film. Adherence shall be complete and uniform over the entire surface of the laminated article. When the lamination is a sandwich and has a margin of plastic around the laminated article, the two plastic films shall adhere to each other.

3.10.3 Quality of laminations. All laminations shall be smooth, free from wrinkles, blisters, cracks, and distortion. The laminated article shall be clearly visible through the plastic. Any mechanical means applied to the lamination to remove the plastic film from the laminated article shall cause separation or destruction of the article rather than removal of the plastic from the article.

3.11 Electromagnetic interference control. Unless otherwise specified (see 6.2), equipment procured under this specification for Military use shall be in accordance with the requirements of MIL-STD-461 for class IIB equipment.

3.12 Environmental requirements. When specified (see 6.2), laminating presses procured for Military use shall conform to the environmental requirements of 3.12.1 and 3.12.2.

3.12.1 Exposure to extreme temperatures. The laminating presses shall conform to the requirements of 3.9 and the lamination production requirements specified therein following the extreme temperature tests of 4.4.3.1.

3.12.2 Moisture resistance. The laminating press surface finish and color shall show no deterioration or change nor shall there be any rust or corrosion on any press surface resulting from the moisture resistance test of 4.4.3.2.

3.13 Accessories. When specified (see 6.2), each press shall be furnished with one of the following accessories as specified:

(a) A manually operated combination trimmer and corner rounder to shear rounded corners and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:00Z
Check the source to verify that this is the current version before use.

a 3/32 inch plastic margin on all sides of 2-5/16 by 3-1/2 inches laminated identification cards.

(b) A trimmer conforming to GG-T-678, class 1, having a capacity commensurate with the maximum rated size of the press, and a self-resetting corner rounder with removable cutters for shearing 1/8 inch and 1/4 inch corner radii.

3.14 Manuals, instruction and parts.

3.14.1 Operating and service instructions. The contractor's standard handbook or pamphlet of operating and service instructions shall be furnished with each press.

3.14.2 Parts manual. For Military procurement, the parts manual requirements shall be as specified in the contract or purchase order.

3.15 Name and data plate. Except on procurement for civil agencies, each end item covered by this specification shall be marked for identification in accordance with MIL-STD-130. For procurement for civil agencies, the plate may be in accordance with the manufacturer's standard practice, provided it is legibly and permanently marked with the manufacturer's name or trademark of such known character that the source of manufacture of the press may be readily determined and contain the type or model and size of the press and the electrical characteristics, as applicable.

3.16 Workmanship. The completely fabricated laminating press shall conform to the quality and grade of product covered by this specification. The laminating press shall be free from defects such as fractures, splits, punctures, tears, dents, creases, bows, miscasts, deteriorations, or malformations. There shall be no sharp edges, burrs, or slivers.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required (see 3.2), it shall be examined for defects listed in table I and tested in accordance with 4.4.1, and when applicable, 4.4.2 and 4.4.3.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated .

4.3.1 Components and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End item inspection. A lot shall consist of all presses of the same type, class, style, and size offered for inspection at one time. The sample unit shall be one press.

4.3.2.1 Visual examination. The completely assembled end item shall be examined for defects in finish, construction, workmanship and marking. Defects shall be as classified in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 4.0 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

4.3.3 Code and standards compliance. The supplier shall furnish the Government representative with proof of compliance with the requirements of UL No. 114 (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:00Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish	Type of finish not as specified or blistered, peeled, chipped or area of no film or thin film.	X	
	Any component or assembly that is painted or otherwise coated where serviceability may be affected.	X	
	Any area of rust.		X
Type	Not type specified.	X	
Class	Not class specified.	X	
Size	Not size specified.	X	
Construction and workmanship, general	Part missing or not specified type or size (except as otherwise indicated herein).		X
	Fractured, split, punctured, torn, dented, creased, deteriorated, bowed, sprung, malformed, decayed or otherwise impaired.	X	
	Defective or otherwise damaged but not affecting serviceability.		X
	Misplaced, loose or not in proper alignment.	X	
	Sharp burr, sliver, or splinter that may be injurious to personnel.	X	
	Functioning component that requires abnormal force to operate.	X	
	Component not readily accessible for servicing where required.		X
Welding or brazing (where required)	Missing, incomplete, burn holes, cracked, fractured, or otherwise not fused.	X	
	Slag inclusions, undercut, not smooth and uniform, scale or flux deposits not removed.		X
Soldering (where applicable)	Missing, not adherent or incomplete, cold solder joints.	X	
	Not clean (flux or flux residue not removed), not smooth (surface not finished neatly) or pin holes in solder.		X
Bolts, nuts, screws, studs, and other types of fasteners	Missing, broken, stripped, fractured or loose.	X	
Electric assembly	Wiring cut, abraded, not properly joined, loose at terminal, or not inclosed in specified conduit where required.	X	
	Adequate slack not provided for wiring to relieve strain or excessive insulation stripped from wiring.		X

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:00Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (Con.)

Examine	Defect	Classification Major	Minor
Assembly	Any component not properly assembled or secured,----------	X	
	Unit perceptible out of square or alignment,----------	X	
Marking identification, instruction manual, wiring diagrams (where applicable)	Missing, incomplete, not legible, not as specified,----------	X	

4.3.2.2 Testing of the end product. When a preproduction sample is not required, the initial production unit shall be tested as specified in 4.4.1 and when applicable 4.4.2 and 4.4.3. Tests outlined in 4.4.1 shall be performed on each lot offered for acceptance. The inspection level shall be level S-1 with an AQL of 4.0 for major defects expressed in terms of defects per hundred units.

4.4 Tests.

4.4.1 Operational test. The press shall be tested for normal laminating operations by employing the type of plastic film recommended by the manufacturer. The press shall be operated a sufficient length of time to determine its capability of meeting the requirements of 3.8 and 3.9, as applicable. The laminations produced during the test shall conform to the requirements of 3.10, 3.10.1, or 3.10.2 and 3.10.3.

4.4.2 Electromagnetic interference control tests. When applicable, the equipment shall be tested in accordance with test methods CE03 and RE02 of MIL-STD-462 to determine compliance with the requirements of 3.11.

4.4.3 Environmental test.

4.4.3.1 Exposure to extreme temperature test. The press shall be stored in an ambient temperature of minus 80°F. for 72 hours and then returned to 70°F. (room temperature) for 4 hours. The press shall then be stored at an ambient temperature of 160°F. for 4 hours and returned to room temperature for one hour (see 3.12.1).

4.4.3.2 Moisture resistance test. The press shall be exposed to 5 cycles of the test specified in MIL-STD-170. After the fifth cycle, the press shall be subjected to the dielectric strength test of UL 114 (see 3.12.2).

4.5 Inspection of preparation fordelivery. An inspection shall be made to determine that preservation, packaging, packing, and marking requirements of section 5 are in compliance with this specification. Defects shall be scored in accordance with table II. For examination of contents, the sample unit shall be one shipping container fully prepared for delivery and selected just prior to the closing operation. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall shall be 4.0 defects per hundred units.

TABLE II. Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:00Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packing. Preservation and packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly. Disassembly shall be the minimum necessary to safeguard parts known to be subject to damage or loss, or that would otherwise increase cubage. All bolts, nuts, and washers removed shall be installed in mating parts. Parts removed shall be matchmarked to facilitate reassembly. Matchmarking information shall be on cloth tags conforming to UU-T-81, type A.

5.1.1.2 Unit packaging. Each press shall be preserved in accordance with method IIB of MIL-P-116.

5.1.2 Level B.

5.1.2.1 Disassembly. Disassembly shall be the minimum necessary to safeguard parts known to be subject to damage or loss, or that would otherwise increase cubage. All bolts, nuts, and washers removed shall be installed in mating parts. Parts removed shall be matchmarked to facilitate reassembly. Matchmarking information shall be on cloth tags conforming to UU-T-81, type A.

5.1.2.2 Unit packaging. Each press shall be packaged in a close-fitting box conforming to PPP-B-636, class domestic. Fiberboard cushioning and blocking shall be provided with the fiberboard meeting the requirements of PPP-F-320, class domestic, variety SW. The box shall be closed in accordance with the appendix to the box specification. Accessories, trimmer and corner rounder, when applicable, shall be packaged in a paperboard or fiberboard box or boxes conforming to PPP-B-566, PPP-B-676, or PPP-B-636. Each box shall be closed and secured in the same box as the press.

5.1.3 Level C. The press shall be preserved and packaged to afford protection against corrosion, deterioration, and damage from the contractor to the initial destination.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Unit packages of presses of like description shall be packed in a close-fitting box conforming to PPP-B-585, class 3; PPP-B-591, class II; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-640, class 2, grade A. The boxes shall be closed and strapped in accordance with the applicable specifications or appendix thereto. The gross weight shall not exceed 200 pounds.

5.2.2 Level B. Each unit package of presses shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to the box specification.

5.2.3 Level C. The presses shall be packed to insure acceptance and safe delivery at destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order (see 6.2), the interior packaging and shipping containers shall be marked in accordance with Fed. Std. No. 12

5.3.2 Military agencies. In addition to markings required by the contract or order (see 6.2), the interior packaging and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The laminating presses covered by this specification are intended for use on an office desk or table. The presses are designed to laminate identification cards, photographs, documents, etc., between two layers of transparent plastic for the purpose of preservation and to render the laminate article tamper proof.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:00Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, style, and size, as applicable of press required (see 1.2.1).
(c) If a preproduction sample is required (see 3.2).
(d) Color and finish, if different (see 3.6.1).
(e) Power supply, if different (see 3.7.1).
(f) Cord length, if different (see 3.7.2).
(g) Selection of either a manual or automatic type I press if required (see 3.9.1).
(h) Electromagnetic interference control, when not required (see 3.11).
(i) Environmental requirements, if required (see 3.12).
(j) Accessories, if required and type (see 3.13).
(k) Selection of applicable levels of packaging and packing requirements (see 5.1 and 5.2).
(l) Marking, if differnet (see 5.3).

6.3 Service guarantee. It is suggested that the purchasing officer include the following clause in the invitation for bids:

Service guarantee. The contractor guarantees the equipment against defective material, workmanship and performance for a period of 1 year, said guarantee to run from date of acceptance of the equipment by the Government. The contractor agrees to furnish, without cost to the Government, replacement of all parts and material which are found to be defective during the guarantee period. Replacement of material and parts shall be furnished to the Government at the point of installation, if installation is within the continental United States, or f.o.b.; the continental United States port to be designated by the purchasing officer if installation is outside of the continental United States. Cost of installation of replacement material and parts shall be borne by the Government.

6.4 Electromagnetic compatibility. The contracting officer should submit a copy of the report required in 4.4.2 to the Commanding General, U. S. Army Electronics Command, Attn: AMSEL-RD-GF, Fort Monmouth, New Jersey, 07703, for approval.

MILITARY INTEREST:

Custodians:

Army - GL
Air Force - 84

Review activity:

Air Force - 85

User activity:

Army - SM

Preparing activity:

GSA-FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:00Z
Check the source to verify that this is the currentversion before use.