MILITARY SPECIFICATION

BAND, CENTERING FOR PROJECTILE 105MM DISGARDING SABOT

This amendment forms a part of Military Specification MIL-B-48570A (AR), dated 30 October 1979, and is approved by the US Army Armament Research and Development Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 6

* 4.4.1.2: Change "A machined band....band blank lot" to "A machined band lot shall be made from one or more band blank lots which have been manufactured under the same conditions."

PAGE 7

4.4.2.1: Delete minor defect 202 in its entirety.

PAGE 8

4.4.2.2: Major Defect 106, delete "Diameter of chamfer, rear face" and substitute "Diameter of chamfer, min, rear face."

PAGE 10

4.5.3: Delete "While being rotated, the band will be compressed by 15% based on the nominal internal diameter of the band blank." and substitute "The outside diameter of the band shall be compressed by .55 + .01 inch while the band is being rotated."

Add page 13 (Figure 1)

FSC: 1315

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

NOTE: The margins of this amendment are marked with an asterisk (*) to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project No.: 1315-A460

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

ROLL DEFLECTION TEST

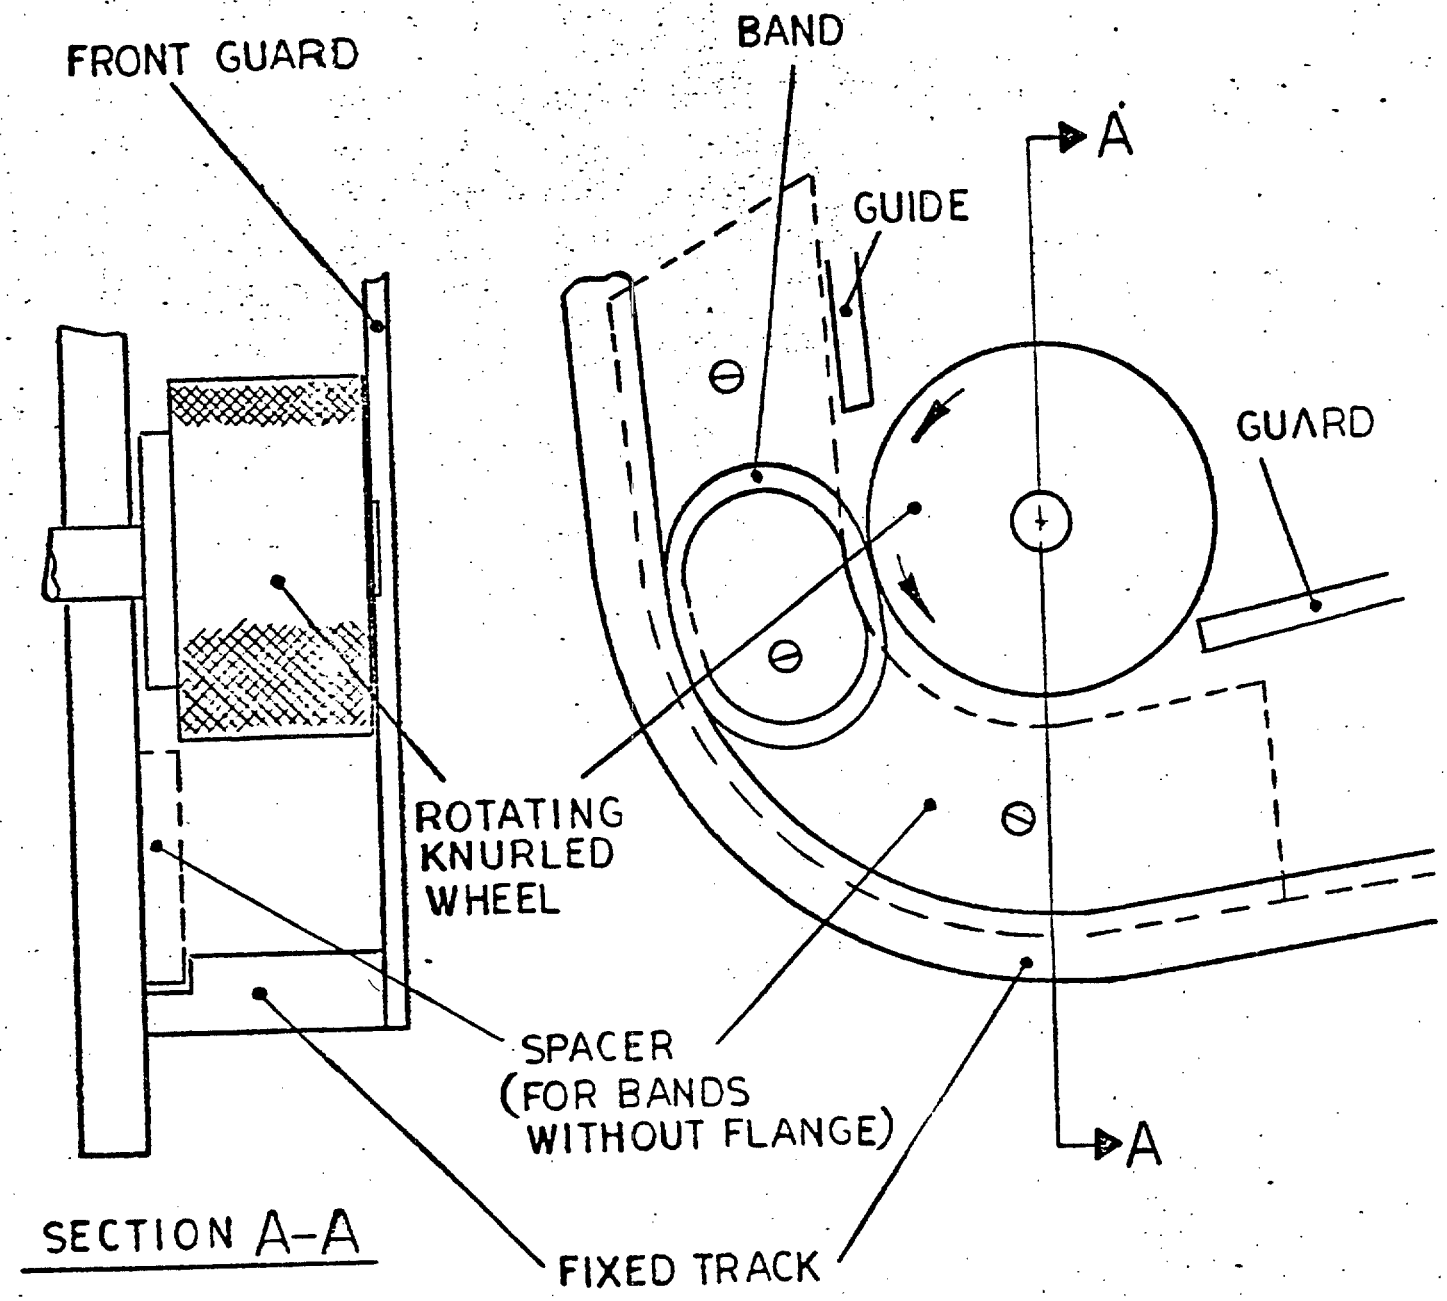


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.