
# MILITARY SPECIFICATION SHEET

## BATTERY, NON-RECHARGEABLE, BA-3590/U

This specification is approved for use within Laboratory Command, Department of the Army, and is available for use by all Department and Agencies of the Department of Defense.

The requirements for acquiring the battery described herein shall consist of this specification and the latest issue of MIL-B-49030(ER).

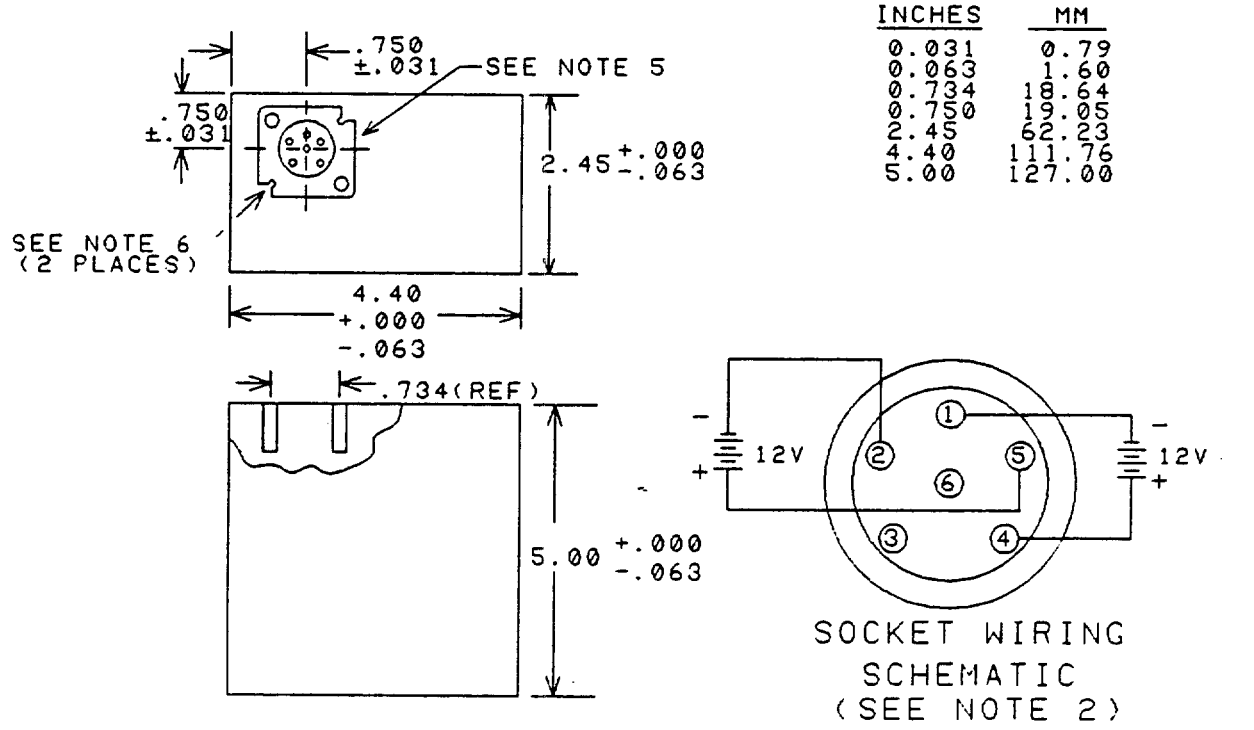


| INCHES | MM |
|---|---|
| 0.031 | 0.79 |
| 0.063 | 1.60 |
| 0.734 | 18.64 |
| 0.750 | 19.05 |
| 2.45 | 62.23 |
| 4.40 | 111.76 |
| 5.00 | 127.00 |

FIGURE 1 - DIMENSIONS AND CONFIGURATION.

AMSC N/A

FSC 6135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Voltage and polarity markings may be placed either on the top or front face of the battery, adjacent to the applicable terminal.
3. Metric equivalents specified are for general information only.
4. Label may be placed on either side of the battery.
5. The battery terminal shall consist of a miniature circular battery connector per SC-C-179492 or equivalent. The connector shall be mounted in accordance with referenced drawing.
6. Connector socket body configuration shall accept two (2) each 0.156 inch diameter guideposts as shown. Depth of cavity shall be 0.622 inch.
7. The socket shall be supported and mounted so that the top surface of the socket shall not protrude above the adjacent outside surface of the jacket and shall not be more than 1/16 inch below adjacent outside surface of the jacket when used initially, during, and after subsequent insertions of the mating plug during contractual testing.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Nominal voltage: 12.0 volts per section (Pins 1 and 4 and Pins 2 and 5). See socket wiring schematic, Figure 1.

Usual number and type of cells: 18 "C" cells.

Weight (maximum): 3.0 pounds.

Capacity Tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity test requirements shall be as specified herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

METHODS OF EXAMINATION AND TEST:

Capacity Tests:

| Test | Storage Period | Temperature (°F) | Min Service Required (Hrs) |
|---|---|---|---|
| I | 48 Hrs. Min. | 70 | 18.0 |
| LT | 16 Hrs. Min. | 0 | 3.0 |
| HT | 7 Days plus | 160 | |
| | 48 Hrs. Min. | 70 | 17.0 |
| T | 13 Weeks plus | 113 | |
| | 48 Hrs. Min. | 70 | 16.0 |
| D | 52 Weeks | 70 | 16.0 |

Discharge: The battery shall be discharged through 133.3 ohms continuously to an end voltage of 20.0 volts between pins 1 and 5 with pins 2 and 4 connected externally.

Closed circuit voltage: When 133.3 ohms is applied the minimum permissable voltage is 20.0 volts.

Custodian:
Army-ER

Preparing Activity:
Army-ER

(Project Number 6135-A210)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.