MILITARY SPECIFICATION

OSCILLATOR, QUINARY, MEMORY AND TENS MATRIX-
A1: 10547210

This Amendment forms a part of Military Specification MIL-C-60576(MU) dated 18 June 1970.

Paragraph 3.7.2.1: Delete paragraph and substitute:

"3.7.2.1 High frequency counters(ON).- With a logical zero level (0.1 ± 0.1 VDC) applied to Pin n, the following outputs shall appear (see Figure 1):

Pin F - SQUARE WAVE at 7.5 MHz ± 0.075 MHz with a low level amplitude of .1 ± .1 VDC and a high level amplitude as follows:

+70°F: 1.2 ± .25 VDC
+155°F: 1.0 ± .20 VDC
-65°F: 1.5 ± .25 VDC

Pin H - Positive pulses with an amplitude of 1.5 ± 0.5V with a pulse width of 133 ± 10 ns repeated every 667 $^{+15}_{-0}$ ns."

Paragraph 3.7.2.2: Delete and substitute:

"3.7.2.2 High Frequency Counters(off).- This DC level can be either a ground potential (.1 ± .1VDC) or the high amplitude levels as defined in para 3.7.2.1."

Paragraph 3.7.2.3: Delete Pin J and Pin L readings and substitute:

"Pin J = 1.2 ± .4 VDC (70°F)
1.1 ± .35 VDC (+155°F)
1.4 ± .35 VDC (-65°F)

Pin L = less than .3 VDC"

Paragraph 3.7.2.4: Delete first sentence and substitute: "Pins J and L are complementary functions which shall be capable of acquiring the following alternate DC levels when Pin N is activated as in 3.7.2.2:

Low Level		High Level
Less than .3 VDC	or	1.2 ± .4 VDC
		1.1 ± .4 VDC
		1.4 ± .35 VDC"

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.


Paragraph 4.3.4: Delete paragraph and substitute:

"4.3.4 Certification.- Certification shall include test data and results for the characteristics specified below. Certification shall be provided prior to performing final acceptance inspection, and remain in effect throughout the performance of the contract. This does not relieve the contractor from inspection throughout the contract production, including recording data and results therefrom. Recorded data and results shall be made available to the Government upon request. A new certification shall be required whenever any change(s) occur in materials, manufacturing processes and techniques previously certified. Exception to the above may be provided by certificate of compliance (COC) for those items for which the contractor cannot obtain recorded data, i.e., off the shelf items. This exception shall not apply without prior approval by Frankford Arsenal. Request for approval shall include item name, part number, identification of supplier, and justification for exception; and shall be forwarded to Commanding Officer, Frankford Arsenal, ATTN: SMUFA-Q4000."

Paragraph 4.6.5.1.2: Delete third sentence and substitute: "The output at Pin J and Pin L shall be as specified in 3.7.2.3."

Paragraph 4.6.5.1.3: Delete third sentence and substitute: "Repeat this procedure until a DC level less than .3V is established at Pin J."

Figure 1: Delete and substitute:

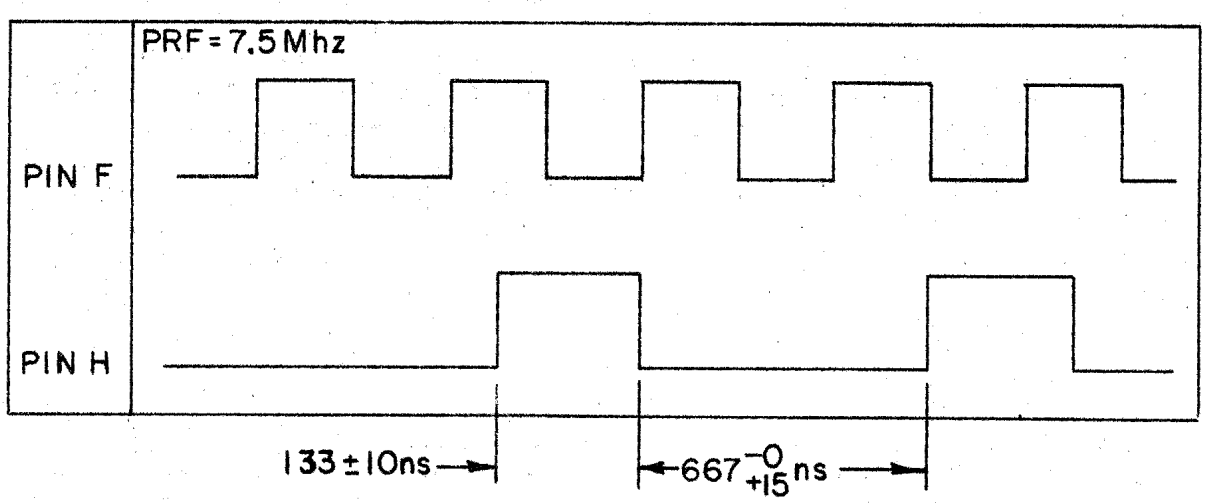

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1240-A391

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.