MIL-C-60590(MU)
AMENDMENT 2
9 October 1967
SUPERSEDING
AMENDMENT 1
28 April 1967

MILITARY SPECIFICATION

CONTAINER, REUSABLE, SHIPPING: 10547128

This amendment forms a part of Military Specification MIL-C-60590(MU), dated 31 August 1966.

Paragraph 2.1: Delete: "MMM-A-132 Adhesives, Heat Resistant Airframe, Structural, Metal to Metal".

Paragraph 3.5.1.2: Delete in entirety and substitute the following:

"3.5.1.2 Bonding of extrusions.- The extrusion edge assemblies shall be attached to the container shells with an air curable adhesive sealant, conforming to General Electric RTV 118 and Primer SCP 154, General Electric Co., Waterford, N. Y. or equal. The primer shall be applied to the mating surfaces of the shells and extrusions and permitted to dry for a minimum of thirty (30) minutes. The sealant shall be applied into the extrusion well and the extrusions shall be assembled to the shells to provide structural integrity and a pressure and watertight joint. Minimum cure time for sealant is twenty-four (24) hours. The extrusion edge assemblies shall be tool rolled and crimped around the periphery to assure positive attachment to container shells."

Delete: "Figures 3 and 4" and substitute attached "Figures 3 and 4".

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A056

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:47Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3 STARTING THICKNESS- .250; COLOR-OLIVE DRAB-NO. X24087 OF FED-STD-595; FINISH-HAIRCELL GRAIN (EXTERIOR), HAIRCELL GRAIN OR SMOOTH (INTERIOR); FORMED WALL THICKNESS- .130±.020
2. TOLERANCES: FRACTIONS ±1/32, ANGLES ±1°
3. SUGGESTED MATERIAL SOURCES:
   U.S. RUBBER CO., CHICAGO, ILL.
   PART NO. R40-4313-CPA1492

* MUST MATCH COVER-FIG. 4
** MUST MATE WITH COVER-FIG. 4


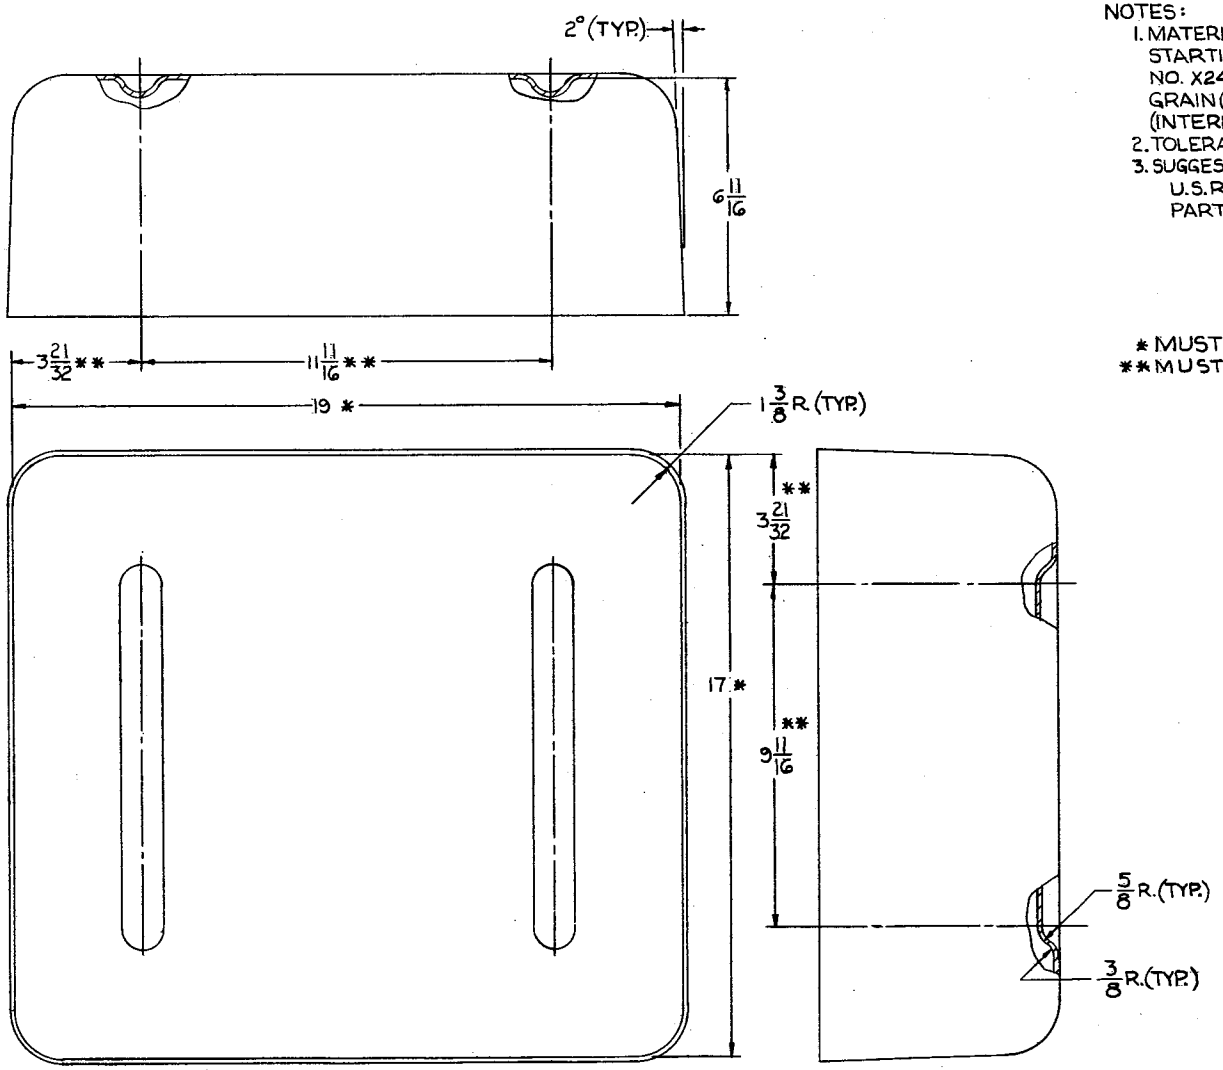



FIGURE 3-BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:47Z
Check the source to verify that this is the current version before use.

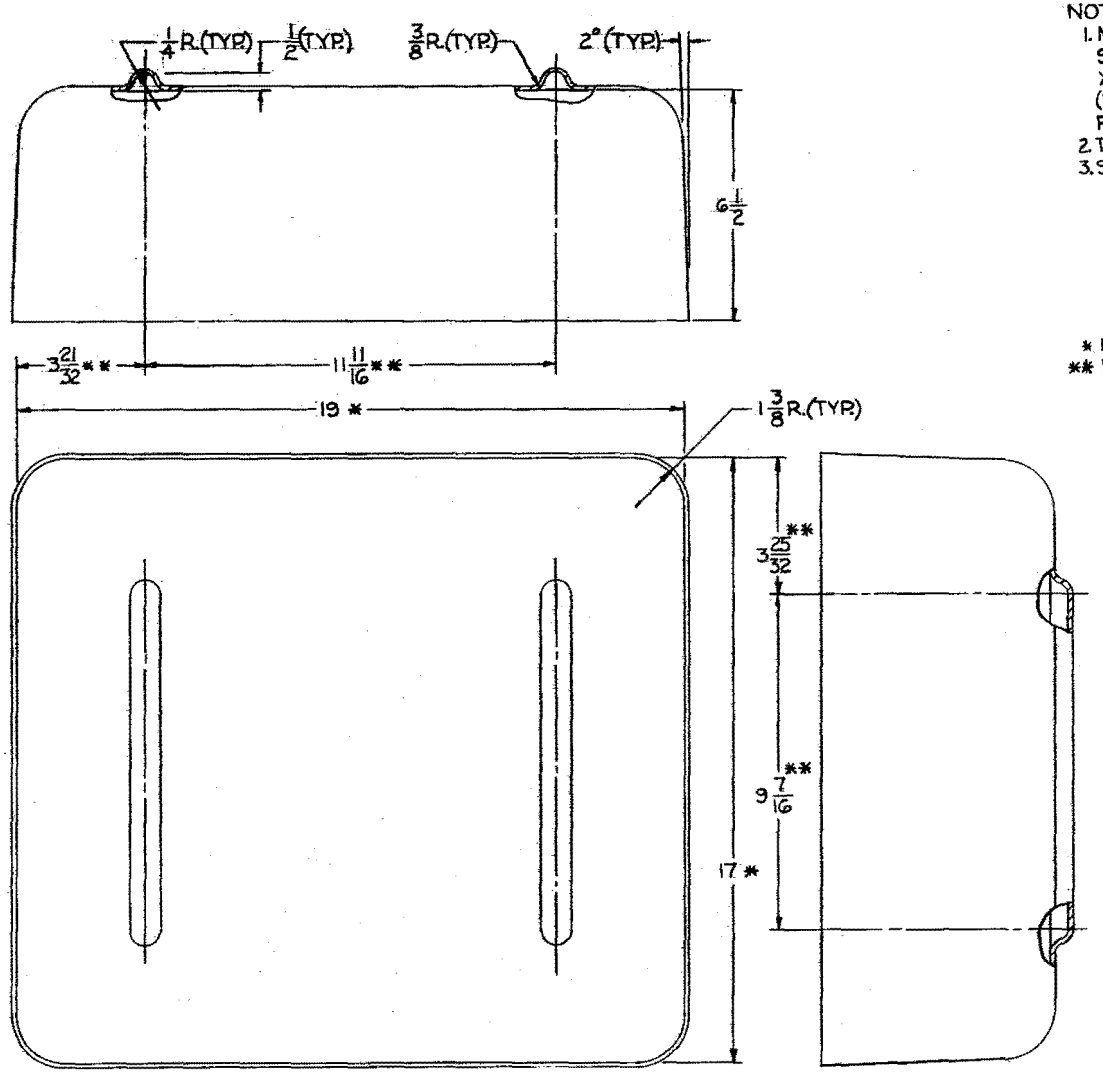


NOTES:
1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3 STARTING THICKNESS-.250, COLOR-OLIVE DRAB-NO. X24087 OF FED-STD-595; FINISH-HAIRCELL GRAIN (EXTERIOR), HAIRCELL GRAIN OR SMOOTH (INTERIOR); FORMED WALL THICKNESS-.130 ±.020
2. TOLERANCES-FRACTIONS ±1/32, ANGLES ±1°
3. SUGGESTED MATERIAL SOURCES:
   U.S. RUBBER CO., CHICAGO, ILL.
   PART NO. R40-4313-CPA 1492

* MUST MATCH BODY-FIG. 3
** MUST MATE WITH BODY-FIG. 3

FIGURE 4-COVER





Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:47Z
Check the source to verify that this is the current version before use.