MILITARY SPECIFICATION

Module, Plug-In, Automatic Lead Selector,
In-Circuit Checker for Test Set, Transistor:
AN/USM 136

This amendment forms a part of Military Specification MIL-T-55204(MU), 2 November 1962.

Paragraph 2.1, Under DRAWINGS, MUNITIONS COMMAND, add:

"C8222453 - ALS Projection Readout"

Paragraph 3.6.1: Add "and indications" before "tests" in the second sentence.

Paragraph 3.6.3: Delete paragraph title and substitute the following:

"Silicon - Germanium finding and Indicating."

At end of paragraph, add the following sentence:

"Results of the finding action shall be displayed on the ALS Projection Readout."

Paragraph 3.6.4: Delete paragraph title and substitute the following:

"Base (Transistor) or cathode (Diode) finding and indicating."

At end of paragraph, add the following sentence:

"Results of the correct lead finding action shall be displayed on the ALS Projection Readout."

Paragraph 3.6.5: Delete paragraph title and substitute the following:

"Emitter finding and indicating."

At end of paragraph, add the following sentence:

"Results of the correct lead finding action shall be displayed on the ALS Projection Readout."

Paragraph 3.6.5.1; 3rd sentence: Following the word "Switch", add:

"K1313-A6"

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:37Z
Check the source to verify that this is the current version before use.

Paragraph 3.6.6: Delete paragraph title and substitute the following:

"PNP-NPN finding and indicating." Complete the last sentence of the paragraph by changing the period to a comma and adding:

"at which time the results of the finding action shall be displayed on the ALS projection readout."

Paragraph 4.1: Delete paragraph and substitute the following paragraph:

"4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements."

Paragraph 4.9.2.1, Item (b): Delete the second sentence and substitute the following:

"The ALS projection readout noted as part of Figure 1 must be used to determine lead, polarity and material finding action."

Paragraph 4.9.2.2.1: Delete paragraph title and substitute the following:

"Silicon - Germanium finding and indicating"

Item (c), at end of paragraph add the following:

"The ALS Projection Readout shall indicate NPN, SILICON, and the correct lead orientation."

Item (e), at end of paragraph add the following:

"The ALS projection readout shall indicate PNP, GERMANIUM, and the correct lead orientation."

Paragraph 4.9.2.2.2, make the following changes:

Item (b), delete and substitute the following:

"Press the TEST button at the end of the test. The ALS projection Readout shall indicate PNP, GERMANIUM, and BEC. The GO light shall light."

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:37Z
Check the source to verify that this is the current version before use.

Item (d): Delete and substitute the following:

"Press the TEST button at the end of the test. The ALS projection readout shall indicate PNP, GERMANIUM, and ECB. The GO light shall light."

Item (f): Delete and substitute the following:

"Press the TEST button at the end of the test. The ALS projection readout shall indicate SILICON, ANODE. The GO light shall light."

Item (h): Delete and substitute the following:

"Press the TEST button at the end of the test. The ALS projection readout shall indicate SILICON, ANODE. The GO light shall light."

Item (k): Delete "--- and switch to IN-CIRCUIT Test."

Item (l): Delete and substitute the following:

"Press the TEST button at the end of the test. THE ALS projection Readout shall indicate SILICON, ANODE. The GO light shall light."

Item (o): Delete first sentence and substitute the following:

"RESET the module to READY, switch to the IN-CIRCUIT test position and remove the test diode but leave the 250 ohm test resistor in the DIODE TEST CLIPS."

Item (p): Delete and substitute the following:

"Press the TEST button and observe the lighting of the GO light."

Item (t): Delete second sentence.

Paragraph 4.9.2.2.3, make the following changes:

Item (b): Delete and substitute the following:

"Press the TEST button at the end of the test. The ALS projection readout shall indicate NPN, SILICON, and BCE. The GO light shall light."

Item (d): Delete and substitute the following:

"Press the TEST button and observe the lighting of the GO light."

Source: https://assist.dla.mil - Downloaded: 2026-10-22T22:57Z
Check the source to verify that this is the current version before use.

Item (f): Delete and substitute the following:

"Press the TEST button and observe the lighting of the NO GAIN light."

Page 10, paragraph 4.9.2.2.4, PNP-NPN finding:

Item (b): Delete and substitute the following:

"Press the TEST button and observe the lighting of the GO light. The Stepper shall have taken more than fifteen (15) steps."

Figure 1: Delete and substitute revised Figure 1.

Custodian:
Army - MU

Preparing activity:
Army - MU

Project No. 6625-A172

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:37Z
Check the source to verify that this is the current version before use.

AUTOMATIC READ SELECTOR-IN-CIRCUIT CHECKER (A100) MODULE F8625449

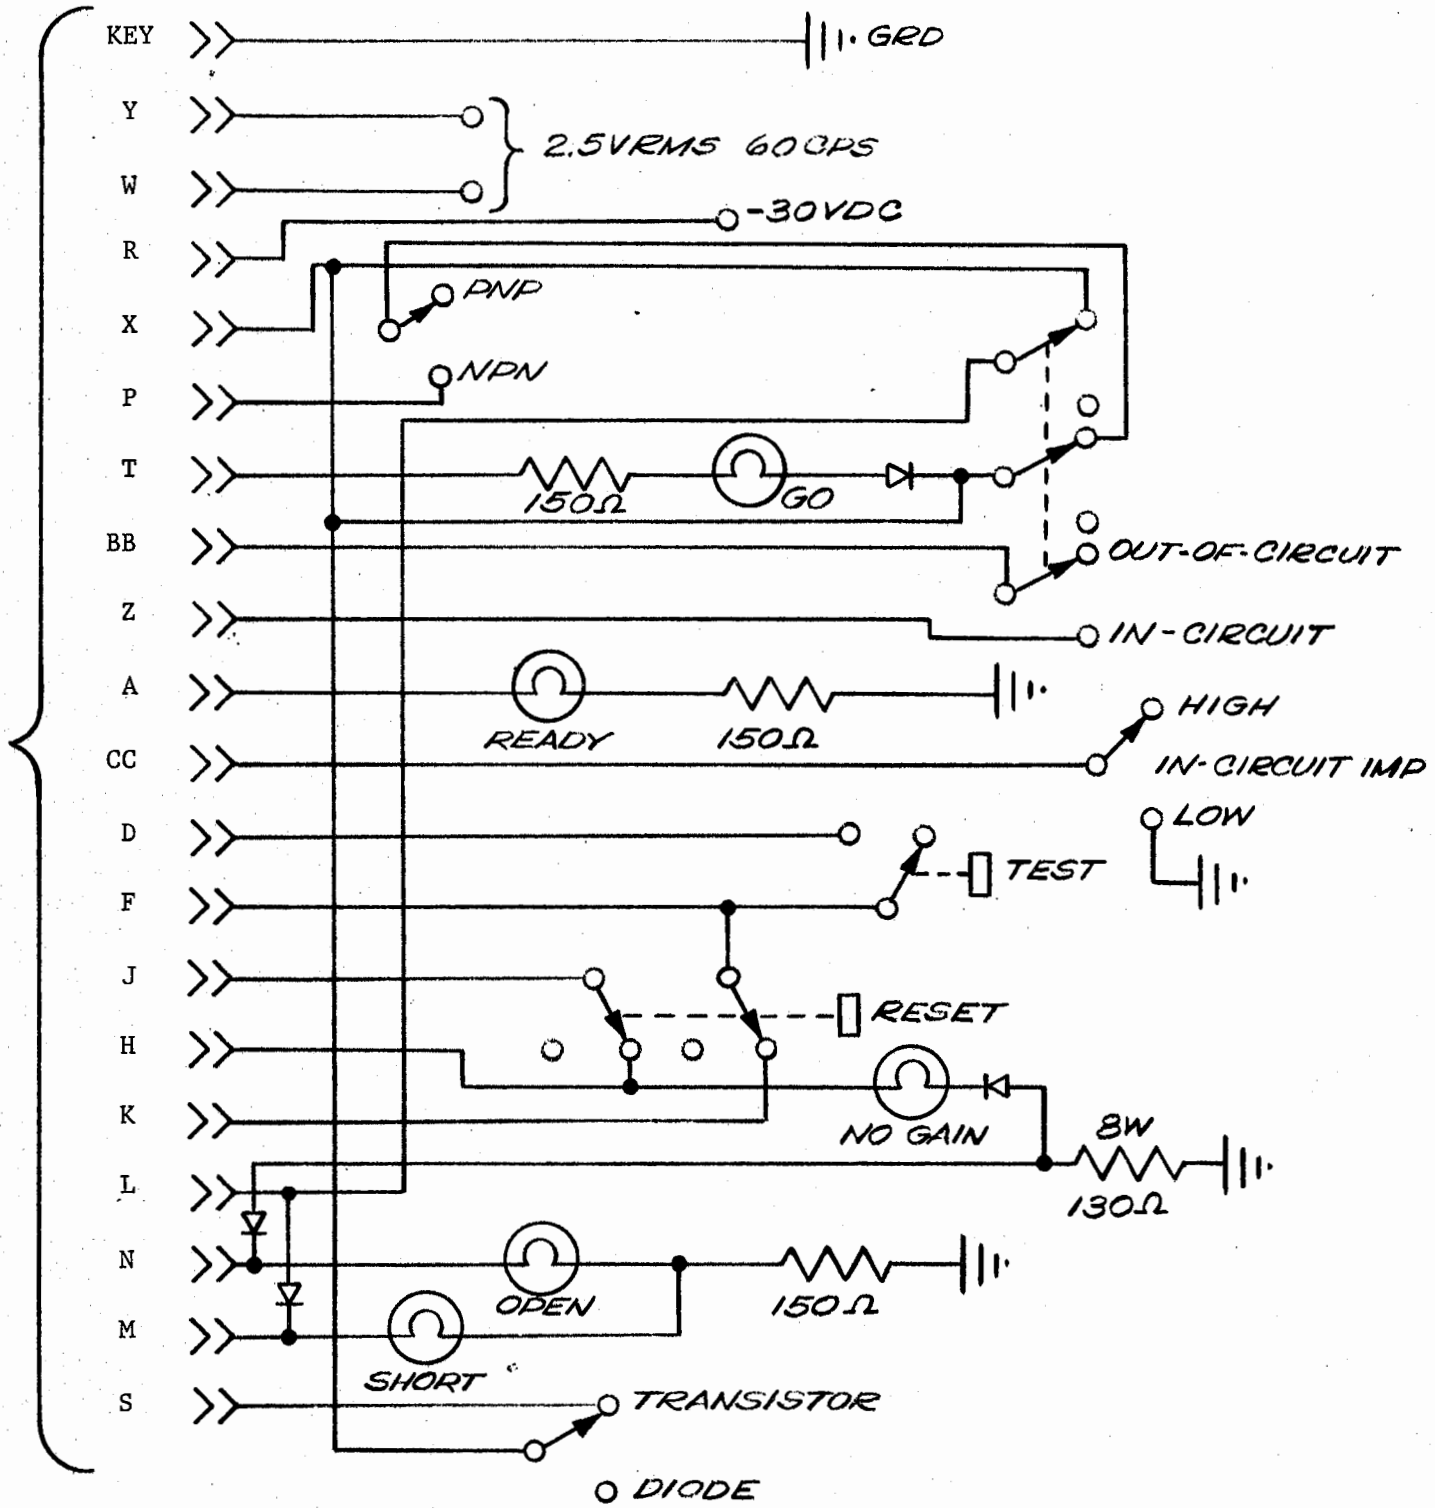


FIGURE 1. AUTOMATIC LEAD SELECTOR IN-CIRCUIT CHECKER TEST CIRCUIT

NOTE: All bulbs Type 327.
All diodes Type IN538
Connect a complete breadboard assembly A200, Part #8222453, to J201 for these tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:37Z
Check the complete revision status of this document at https://assist.dla.mil