INCH-POUND

MIL-DTL-7885/21
25 April 1996

DETAIL SPECIFICATION SHEET

RIVETS, BLIND, STRUCTURAL, UNIVERSAL PROTRUDING HEAD, NICKEL-COPPER ALLOY SLEEVE(ALUM COAT), MECHANICALLY LOCKED CRES SPINDLE, OVERSIZE DIAMETER (TYPE I, STYLE B, CLASS 1)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the blind rivets described herein shall consist of this document and the latest issue of MIL-R-7885.

DESIGN AND USAGE LIMITATION. The blind rivets shall be used in accordance with the limitations of MS33522.

INSTALLATION. The blind rivets shall have the capability of being installed by a tool conforming to MIL-R-85188. Lubricant shall not be removed prior to installation.

REQUIREMENTS:

MATERIAL:

Sleeve: Nickel-Copper Alloy (Monel) in accordance with QQ-N-281 (UNS N04405).
Spindle: 15-7PH CRES in accordance with AMS 5657(UNS S15700), or A-286 CRES per AMS5737 (UNS S66286).
Locking Feature: A-286 CRES per AMS 5731 (UNS S66286).
Lubricant: See general specification (MIL-R-7885).
Grip Adjusting Feature (Optional): Nickel-Copper Alloy (Monel) in accordance with QQ-N-281 (UNS N04405).

PROTECTIVE TREATMENT:

Sleeve: Alum coat per MIL-C-83488, Type II, Class 3 or NAS 4006.
A-286 CRES: Passivate per QQ-P-35.
15-7 CRES: Cadmium plate in accordance with QQ-P-416, Type I, Class 2 at manufacturer's option.
Grip Adjusting Feature: None

SURFACE TEXTURE: Surface texture shall have a roughness average of 125 Ra in accordance with ANSI/ASME B46.1.

TOLERANCES: Unless otherwise specified, decimals +/- .010, angles +/- 2^{o}

Unless otherwise specified, dimensions are in inches.

Break all sharp edges and remove all burrs and slivers.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:28Z
Check the source to verify that this is the current version before use.

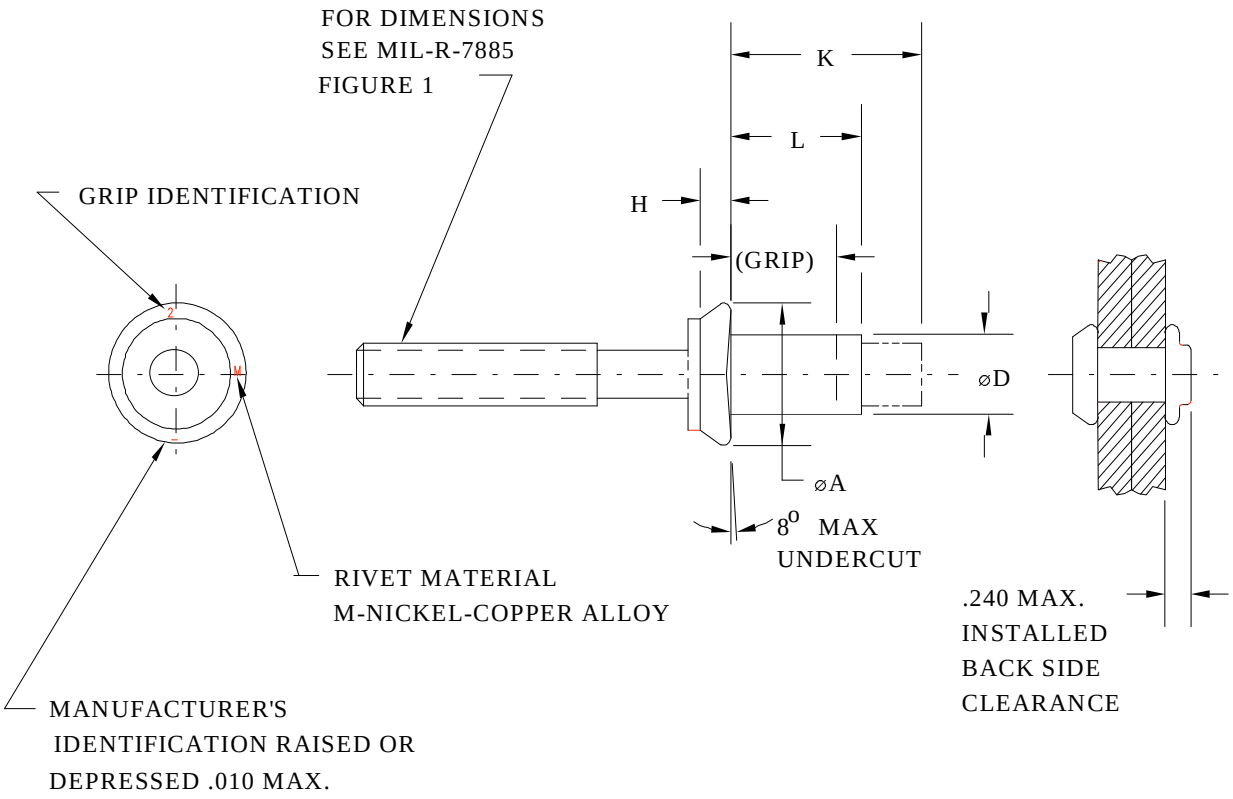

Optional Driving Anvil Silver Colored to Identify Style "B" Rivets
Head Marking Visible After Installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:28Z
Check the source to verify that this is the current version before use.

TABLE I

NOMINAL SIZE	BASIC BODY DIA	∅A		∅D		H		INSTALLATION HOLE LIMITS	
		MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
4	.125	.260	.240	.143	.139	.064	.054	.146	.143
5	.156	.322	.302	.176	.172	.077	.067	.180	.176
6	.187	.385	.365	.204	.200	.090	.080	.209	.205

TABLE II

GRIP LIMITS		NOMINAL SIZE								
		4			5			6		
MIN	MAX	DASH NO.	L +.000 -.065	K MAX	DASH NO.	L +.000 -.065	K MAX	DASH NO.	L +.000 -.065	K MAX
(a)	.062	-01	.175	.370	-01	.203	.430	-01	.242	.450
.063	.125	-02	.238.	.460	-02	.246	.470	-02	.265	.500
.126	.187	-03	.301	.520	-03	.309	.530	-03	.328	.550
.188	.250	-04	.363	.580	-04	.371	.600	-04	.390	.620
.251	.312	-05	.426	.650	-05	.434	.660	-05	.453	.680
.313	.375	-06	.488	.710	-06	.496	.720	-06	.515	.740
.376	.437	-07	.551	.780	-07	.559	.790	-07	.578	.820
.438	.500	-08	.613	.840	-08	.621	.850	-08	.640	.890
.501	.562	-09	.676	.900	-09	.684	.910	-09	.703	.950
.563	.625				-10	.746	.980	-10	.765	1.010
.626	.687				-11	.809	1.040	-11	.828	1.070
.688	.750							-12	.890	1.140

(a) Do not use part number M7885/21-4-01 below .025 grip.
Do not use part number M7885/21-5-01 below .031 grip.
Do not use part number M7885/21-6-01 below .037 grip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:28Z
Check the source to verify that this is the current version before use.

EXAMPLE OF PART NUMBER:

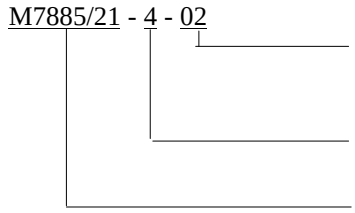

Custodians
Army - AR
Navy - AS
Air Force - 99

Preparing Activity:
DLA-IS

(Project No. 5320-0812-11)

Review Activities:
Army - AV
Navy - MC
Air Force - 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:28Z
Check the source to verify that this is the current version before use.