INCH-POUND

MIL-DTL-7885/27
25 April 1996

DETAIL SPECIFICATION SHEET

RIVETS, BLIND, STRUCTURAL, 100° FLUSH SHEAR HEAD, 5056 AL ALLOY SLEEVE, MECHANICALLY LOCKED 8740 ALLOY STEEL SPINDLE, (TYPE I, STYLE A, CLASS 3)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the blind rivets described herein shall consist of this document and the latest issue of MIL-R-7885.

DESIGN AND USAGE LIMITATION. The blind rivets shall be used in accordance with the limitations of MS33522.

INSTALLATION. The blind rivets shall have the capability of being installed by a tool conforming to MIL-R-85188. Lubricant shall not be removed prior to installation.

REQUIREMENTS:

MATERIAL:

Sleeve: 5056 Al Alloy per QQ-A-430 (UNS A95056).
Spindle: 8740 alloy steel per AMS 6322 (UNS G87400).
Locking Feature: A-286 CRES per AMS 5731 (UNS S66286) or 5056 Al Alloy per QQ-A-430 (UNS A95056).
Lubricant: See general specification (MIL-R-7885).
Grip Adjusting Feature (Optional): AISI 1038 carbon steel (UNS G10380), 8740 alloy steel per AMS 6322 (UNS G87400), or 7050-T73 AL Alloy per QQ-A-430 (UNS A97050).

PROTECTIVE TREATMENT:
5056 Al Alloy: Chemically treated per MIL-C-5541.
8740 alloy steel: Cadmium plate in accordance with QQ-P-416, Type II, Class 2.
A-286 CRES: Passivate per QQ-P-35.
1038 or 8740 steel: Cadmium plate in accordance with QQ-P-416, Type II, Class 2.
7050-T73 Al Alloy: Chemically treated per MIL-C-5541.

SURFACE TEXTURE: Surface texture shall have a roughness average of 125 Ra in accordance with ANSI/ASME B46.1.

TOLERANCES: Unless otherwise specified, decimals +/- .010, angles +/- 2 °.

Unless otherwise specified, dimensions are in inches.

Break all sharp edges and remove all burrs and slivers.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:29Z
Check the source to verify that this is the current version before use.

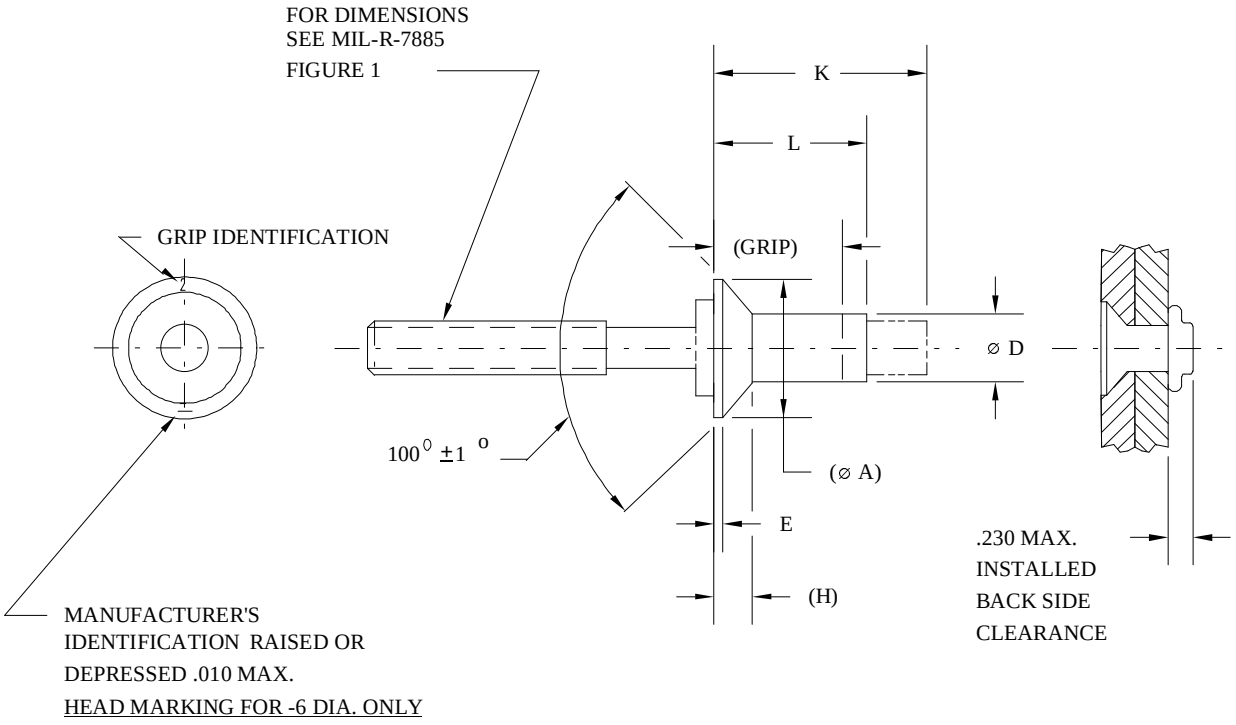

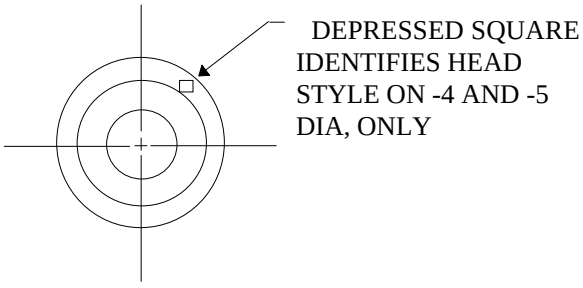

HEAD MARKING FOR
-4 AND -5 DIA'S ONLY
NO DOT FOR ALUM/STEEL MATERIAL

Optional Driving Anvil Gold Colored to Identify Style "A" Rivets.
Head Marking Visible After Installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:29Z
Check the source to verify that this is the current version before use.

TABLE I

NOMINAL SIZE	BASIC BODY DIA	⌀ A (Theoretical)		⌀ D		E		H	INSTALLATION HOLE LIMITS	
		MAX	MIN	MAX	MIN	MAX	MIN	REF	MAX	MIN
4	.125	.196	.188	.129	.125	.010	.002	.027	.132	.129
5	.156	.247	.239	.160	.156	.012	.002	.035	.164	.160
6	.187	.303	.295	.192	.188	.012	.002	.045	.196	.192

TABLE II

GRIP LIMITS		NOMINAL SIZES								
		4			5			6		
MIN	MAX	DASH NO.	L +.000 -.030	K MAX	DASH NO.	L +.000 -.030	K MAX	DASH NO.	L +.000 -.030	K MAX
(a)	.125	-02	.224	.450	-02	.230	.470	-02	.262	.510
.126	.187	-03	.287	.510	-03	.293	.530	-03	.325	.570
.188	.250	-04	.349	.570	-04	.355	.590	-04	.387	.640
.251	.312	-05	.412	.630	-05	.418	.650	-05	.450	.700
.313	.375	-05	.474	.700	-05	.480	.720	-05	.512	.760
.376	.437	-07	.537	.760	-07	.543	.770	-07	.575	.820
.438	.500	-08	.599	.820	-08	.605	.840	-08	.637	.880
.501	.562	-09	.662	.880	-09	.668	.900	-09	.700	.950
.563	.625				-10	.730	.960	-10	.762	1.010
.626	.687				-11	.793	1.020	-11	.825	1.070
.688	.750							-12	.887	1.130

(a) Do not use part number M7885/27-4-02 below .063 grip.
Do not use part number M7885/27-5-02 below .065 grip.
Do not use part number M7885/27-6-02 below .080 grip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:29Z
Check the source to verify that this is the current version before use.

EXAMPLE OF PART NUMBER:

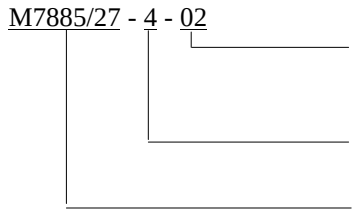

Custodians:
Army - AR
Navy - AS
Air Force - 99

Preparing Activity:
DLA-IS

(Project No. 5320-0829)

Review Activities:
Army - AV
Navy - MC
Air Force - 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:29Z
Check the source to verify that this is the current version before use.