INCH-POUND
MIL-DTL-7885/8C
29 July 1997
SUPERSEDING
MIL-R-7885/8B
18 APRIL 1988

DETAIL SPECIFICATION SHEET

RIVETS, BLIND, STRUCTURAL, UNIVERSAL PROTRUDING HEAD, NICKEL-COPPER ALLOY SLEEVE, MECHANICALLY LOCKED 15-7PH CRES SPINDLE OVERSIZE DIAMETER (TYPE I, STYLE B, CLASS 1)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the blind rivets described herein shall consist of this document and the latest issue of MIL-R-7885.

DESIGN AND USAGE LIMITATION. Rivets shall be used in compliance with the limitations of MS33522.

INSTALLATION. Rivets shall be capable of being installed by a tool conforming to MIL-R-85188. Lubricant shall not be removed prior to installation.

REQUIREMENTS:

MATERIAL:

Sleeve: Nickel-Copper Alloy (Monel) in accordance with QQ-N-281 (UNS NO4405).
Spindle: CRES 15-7PH in accordance with AMS5657 (UNS S15700), or A-286 CRES per AMS 5737 (UNS S66286)
Locking Feature: A-286 CRES per AMS 5731 (UNS S66286).
Lubricant: See general specification (MIL-R-7885).
Grip Adjusting Feature (Optional): 15-7PH CRES per AMS5657, or Nickel-Copper Alloy (Monel) per QQ-N-281 (UNS N04405).

PROTECTIVE TREATMENT:

A-286 CRES: Parts manufactured after August 1988 shall be passivated per QQ-P-35.

SURFACE TEXTURE: Surface texture shall be measured per ANSI/ASME B46.1 and shall not exceed 125 microinches.

TOLERANCES: Unless otherwise specified, decimals +/- .010, angles +/- 2°.

Unless otherwise specified, dimensions are in inches.

Break all sharp edges and remove all burrs and slivers.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:27Z
Check the source to verify that this is the current version before use.

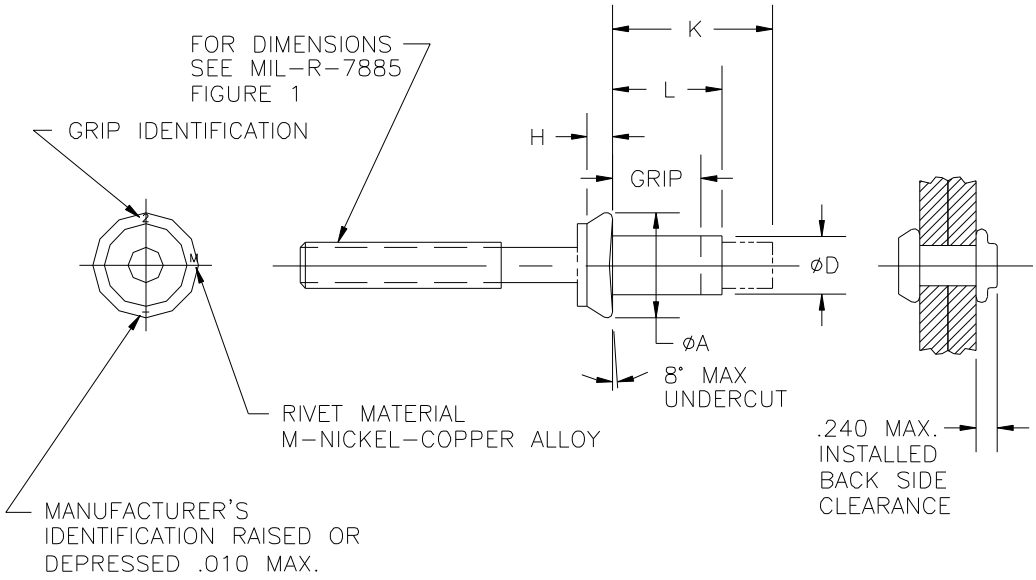

Optional Driving Anvil Gold Colored to Identify Style "A" Rivets

TABLE I

Nominal Size	Basic Body Dia	∅A		∅D		H		Installation hole Limits	
		Max	Min	Max	Min	Max	Min	Max	Min
4	.125	.260	.240	.143	.139	.064	.054	.146	.143
5	.156	.322	.302	.176	.172	.077	.067	.180	.176
6	.187	.385	.365	.204	.200	.090	.080	.209	.205

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:27Z
Check the source to verify that this is the current version before use.

TABLE II

Grip Limits		Nominal Sizes								
		4			5			6		
Min	Max	Dash No.	L +.000 -.030	K Max	Dash No.	L +.000 -.030	K Max	Dash No.	L +.000 -.030	K Max
(a)	.062	-01	.175	.370	-01	.203	.430	-01	.242	.450
.063	.125	-02	.238	.460	-02	.246	.470	-02	.265	.500
.126	.187	-03	.301	.520	-03	.309	.530	-03	.328	.550
.188	.250	-04	.363	.580	-04	.371	.600	-04	.390	.620
.251	.312	-05	.426	.650	-05	.434	.660	-05	.453	.680
.313	.375	-06	.488	.710	-06	.496	.720	-06	.515	.740
.376	.437	-07	.551	.780	-07	.559	.790	-07	.578	.820
.438	.500	-08	.613	.840	-08	.621	.850	-08	.640	.890
.501	.562	-09	.676	.900	-09	.684	.910	-09	.703	.950
.563	.625				-10	.746	.980	-10	.765	1.010
.626	.687				-11	.809	1.040	-11	.828	1.070
.688	.750							-12	.890	1.140

(a) Do not use part number M7885/8-4-01 below .025 grip
Do not use part number M7885/8-5-01 below .031 grip.
Do not use part number M7885/8-6-01 below .037 grip

EXAMPLE OF PART NUMBER:

M7885/8 - 4 - 02

- 02 — Grip length dash no. in .062-inch increments (see Table II).
- 4 — Nominal sizes in .0312-inch increments (see Table I).
- M7885/8 — Specification Sheet No.

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to extent of changes.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Preparing Activity:
DLA-IS
(Project No. 5320-0901-08)

Review Activities:
Army - AV
Navy - MC
Air Force - 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:27Z
Check the source to verify that this is the current version before use.