MIL-R-7885/7C
18 April 1988
SUPERSEDING
MIL-R-007885/7B(AS)
5 March 1986

MILITARY SPECIFICATION SHEET

RIVETS, BLIND, STRUCTURAL, 100° FLUSH HEAD, 5056 AL ALLOY SLEEVE, MECHANICALLY LOCKED 8740 ALLOY STEEL SPINDLE, OVERSIZE DIAMETER (TYPE I, STYLE B, CLASS 2)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the blind rivets described herein shall consist of this document and the latest issue of MIL-R-7885.

DESIGN AND USAGE LIMITATION. The blind rivets shall be used in accordance with the limitations of MS33522.

INSTALLATION. The blind rivets shall have the capability of being installed by a tool conforming to MIL-R-85188. Lubricant shall not be removed prior to installation.

REQUIREMENTS:

MATERIAL:

Sleeve: 5056 Al alloy per QQ-A-430 (UNS A95056).
Spindle: 8740 steel per AMS6322 (UNS G87400).
Locking Feature: A-286 CRES per AMS 5731 (UNS S66286) or 5056 Al Alloy per QQ-A-430 (UNS A95056).
Grip Adjusting Feature (Optional): 10XX series carbon steel or 8740 steel per AMS 6322.
Lubricant: See general specification (MIL-R-7885).

PROTECTIVE TREATMENT:

5056 Al Alloy: Chemically treat per MIL-C-5541, color clear.
8740 Alloy Steel: Cadmium Plate per QQ-P-416, Type II, Class 2.
10XX Series Carbon Steel: Cadmium plated per QQ-P-416, Type I or II, Class 2.

A-286 CRES: Parts manufactured after August 1988 shall be passivated per QQ-P-35.

SURFACE TEXTURE: In accordance with ANSI B46.1; not greater than 125 microinches.

TOLERANCES: Unless otherwise specified, decimals $\pm$.010, angles $\pm$2°.


Unless otherwise specified, dimensions are in inches.

Break all sharp edges and remove all burrs and slivers.

AMSC N/A FSC 5320

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:27Z
Check the source to verify that this is the current version before use.

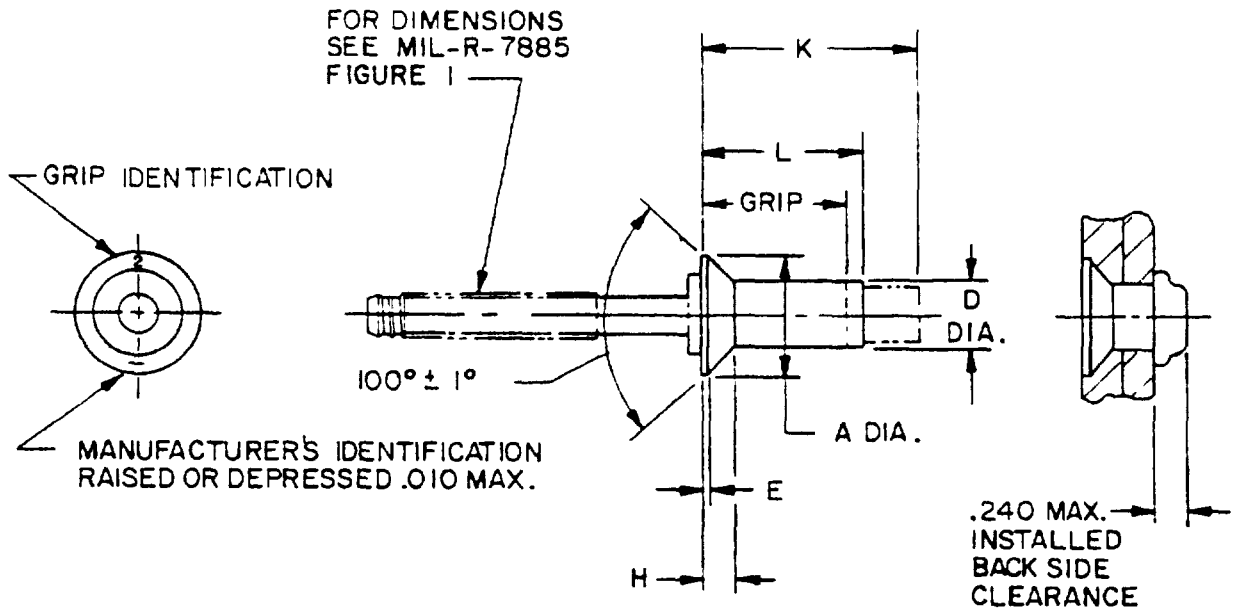

Optional Driving Anvil Silver Colored to Identify Style "B" Diameter Rivets. Head Marking Visible After Installation.

TABLE I

Nominal Size	Basic Body Dia	A Dia (Theoretical)		D Dia		E		H	Installation Hole Limits	
		Max	Min	Max	Min	Max	Min	Ref	Max	Min
4	.125	.229	.221	.143	.139	.006	.002	.035	.146	.143
5	.156	.290	.282	.176	.172	.006	.002	.047	.180	.176
6	.187	.357	.349	.204	.200	.006	.002	.063	.209	.205

Source: https://assist.dla.mil -- Downloaded: 202610-17T09:27Z
Check the source to verify that this is the current version before use.

TABLE II

Grip Limits		Nominal Sizes								
		4			5			6		
Min	Max	Dash No.	L +.000 -.030	K Max	Dash No.	L +.000 -.030	K Max	Dash No.	L +.000 -.030	K Max
(a)	.125	-02	.238	.450	-02	.266	.470	-02	.265	.480
.126	.187	-03	.301	.520	-03	.309	.530	-03	.328	.550
.188	.250	-04	.363	.580	-04	.371	.600	-04	.390	.620
.251	.312	-05	.426	.650	-05	.434	.660	-05	.453	.680
.313	.375	-06	.488	.710	-06	.496	.720	-06	.515	.740
.376	.437	-07	.551	.780	-07	.559	.790	-07	.578	.820
.438	.500	-08	.613	.840	-08	.621	.850	-08	.640	.890
.501	.562	-09	.676	.900	-09	.684	.910	-09	.703	.950
.563	.625				-10	.746	.980	-10	.765	1.010
.626	.687				-11	.809	1.040	-11	.828	1.070
.688	.750							-12	.890	1.140

(a) Do not use part number M7885/7-4-02 below .045 sheet thickness.
Do not use part number M7885/7-5-02 below .063 sheet thickness.
Do not use part number M7885/7-6-02 below .073 sheet thickness.

EXAMPLE OF PART NUMBER:

M7885/7 - 4 - 02

- 02 — Grip length dash no. in .062-inch increments (see Table II).
- 4 — Nominal sizes in .0312-inch increments (see Table I).
- M7885/7 — Specification Sheet No.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review Activities:
Army - AV
Air Force - 82
DLA - IS

User Activities:
Navy - MC

Preparing Activity:
Navy - AS
(Project No. 5320-0643)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:27Z
Check the source to verify that this is the current version before use.