INCH POUND
A-A-50369A
September 6, 2000
A-A-50369
March 1, 1989

COMMERCIAL ITEM DESCRIPTION

CAP, KNIT (WATCH)

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. SCOPE. This commercial item description covers the requirements for a Cap, Knit (Watch) used by Navy personnel in cold environments.

2. CLASSIFICATION. The cap shall be one type and size only.

3. SALIENT CHARACTERISTICS.

3.1 Description. The watch cap shall be bell shaped, pull on style. The color shall be Blue Shade 3346. The crown shall be shaped of four (4) or six (6) equal sections joined together by darts of approximately equal lengths. Each finished dart shall extend from the top center of crown to nor less than 1/4 inch from beginning of body stitching. The cap shall be either a simulated two ply construction, or single ply construction. Each cap shall be steam blocked.

3.2 MATERIAL.

3.2.1 Basic material. The 2 ply knitted yarn of the watch cap shall be made of 100% wool fleece or pulled sheep's wool, or a combination of both, not lower in grade than 54's US Standard. The wool shall be free of reprocessed, reused, or waste wool. The wool shall be mothproofed. The finished weight of each knit watch cap shall be not less than 3 ounces. The finished component sections of the watch cap shall conform to the physical requirements in Table I.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, ATTN: DPSC-CRFD, 700 Robbins Avenue, Building 6D, Philadelphia, PA 19111-5096.

AMSC N/A FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

TABLE I. Basic material physical requirements

Characteristics	Requirements	Test methods
Weight of finished cap	3 ounces (minimum)	1/
Wool fiber requirement	Paragraph 3.2.1	Visual 2/
Wool content	Paragraph 3.2.1	AATCC 20A
Mothproofing	Paragraph 3.2.1	MIL-C-43665 or 4/
Colorfastness to:		
Laundering	Not less than grade 3	AATCC 61, Test 1A
Dry cleaning	Not less than grade 3	AATCC 132
Perspiration 2/	Not less than grade 3	AATCC 15
Croking	Not less than grade 3	AATCC 8
Light	40 Hours	AATCC 16, Option A
pH	5 to 8.5	AATCC 81

1/ The cap shall be conditioned for 4 hours in accordance with ASTM D1776 and weighed on a calibrated balance. Weight requirements is + 1/4 ounce.

2/ The wool, in scoured form, shall be visually examined for grade prior to picking, carding, and dyeing by comparison with the capable US Standard. In the event of a dispute, the wool grade shall be determined by a with (wedge) method approved by the Government. The examination for grade shall be performed on a composite sample of 1 pound for each 10,000 pounds or fraction thereof in the lot. The lot shall be unacceptable if the sample does not conform to wool grade requirements specified in this document.

3/ Test perspiration for acid and alkaline.

4/ Mothproofing agent. The cloth shall be given a commercially available mothproofing treatment and shall show no toxicity when tested using method below:

a) Title 40, Code of Federal Regulation, 1994 Edition;
Section 798.4100 – Dermal Sensitization
Section 798.4470 – Primary Dermal Irritation
Section 798.4500 – Primary Eye Irritation
Marzulli, F & H. Maibach “Contact Allergy; Predictive Testing Humans”, Advance in Modern Toxicology, volume 4, pg. 353-372, 1977.

b) As an alternate to animal and human testing, the contractor may provide information which certifies that the cloth is composed of chemicals, and/or materials, which have been safely used commercially where prolonged skin contact has occurred.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

3.2.2 Knit stitch type. When simulated two ply construction is used, the stitch type for the body shall be half or full cardigan, with the crown a 1x 1 rib (see figure 1). If a single ply construction is used, the body shall be half or full cardigan, with the crown and bottom a 1x 1 rib, with the bottom having a non-raveling edge (see Figure2).

TABLE II. Physical requirements
Knitted component parts

Component	Stitch Type	Wales per Inch (min.)	Courses per inch (min)
Simulated two ply process, when applicable:	Half or full Cardigan	6	12
Body	1 x 1 rib	6	14
Crown			
Single ply process, when applicable:	Half or full Cardigan	6	12
Body			
Crown	1x 1 rib	9	14
Bottom	1x 1 rib with non-raveling edge	6	12

3.2.3 Color. The color of the test specimen shall match the standard sample when viewed under filtered tungsten lamps that approximate artificial daylight, and that have a correlated color temperature of 7500K (+/- 200K), with illumination of 100 (+/- 20) foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2300K (+/- 200K). The color shall be Blue 3346 and shall match the standard sample.

3.2.4 Thread. The thread for seaming and stitching the watch cap shall be cotton conforming to Type III, Ticket Number A of A-A-52094. As an alternate, Type I, Ticket Number 70 of A-A-50199 may be used.

3.2.5 Cover thread. A two (2) ply worsted yarn shall be used as cover thread.

3.3 Labels. Each cap shall have a combination identification and instruction label with characters a minimum of 18-points (approximately 1/4 inch) and the print shall be black showing fastness to laundering only when tested in accordance with AATCC 61, Test 3A. The label shall be caught in the stitching of the crown. The following inscription shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

CAP, KNIT (WATCH)
(100% Wool)
CONTRACT NO.: SPO100-000-0000 (Example)
STOCK NO.: 8405-01-006-2074
NAME OF SUPPLIER:
Dry clean for best results
OR
Hand launder in lukewarm water using mild soap
DO NOT WRING OR TWIST
Rinse in clean, cold water
Reshape and dry flat

3.3.1 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). There shall be a 12 digit UPC number assigned for all NSNs by the procuring agency. The initials UPC must appear beneath the code. The bar code for NSN and UPC type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item. The UPC code must also be placed on all shipping cartons on which the NSN appears.

3.4 Measurements. The finished measurements of the cap shall conform to Table II. All measurements and tolerance are expressed in inches, and shall be taken without pulling or stretching the cap.

TABLE III. Finished measurements in inches

Measurement	Dimension	Tolerance
SIMULATED TWO PLY PROCESS 1/		
Overall length (A)	10-1/4 to 12	
Width across bottom edge (B)	7 to 9	
Length of dart (C)	2 min.	
SINGLE PLY PROCESS 2/		
Height of crown (A)	2-1/2	± 1/4
Height of rack stitch (B)	5/8	± 1/8
Overall length (C)	11 to 12-1/2	
Width across bottom edge (D)	8-1/2	± 1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

1/ For the simulated two ply process, refer to Figure 1 for the following points of measurements:

2/ For single ply process, refer to Figure 2 for the following points of measurements:

(A) Measurement shall be taken from top center point of crown to bottom edge of crown (to rack stitching).

(B) Measurement shall be taken from bottom open edge of rack stitch to beginning of body stitching.

(C) Measurement shall be taken from top center point of crown to bottom open edge of rack stitching, with the cap folded in half lengthwise so as to lie flat.

(D) Measurement shall be taken across the bottom open edge of cap.

4. REGULATORY REQUIREMENTS.

4.1 Flammability requirements. The basic material shall conform to the rules and regulations of the Flammability Fabrics Act without the application of a flame retardant finish to material or the end item.

4.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered or environmentally referable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products offered shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product that is offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Visual examination. Each cap shall be examined for the defects listed below.

5.2.1 Defects. Any hole, cut, tear, needle chew; any mend, darn noticeable, uneven knitting, loose yarn; missing yarn or broken yarn, dropped stitch. Lint and /or foreign matter not removed. Wales courses per inch not as specified, thin place, shaded parts, run, loops in row vary in size causing row to appear uneven, uniform, and /or skewed, heavy yarn, knot, miss-knit, loose course, yarn variation, weak spot, drop ply, float, thin yarn, thick yarn. Cap not steam blocked. Any section of crown visibly off center. Any section of crown visibly uneven. Color not as specified. Any spot or stain clearly noticeable. Raw edges, open seams, thread ends not trimmed, loose tension resulting in loose seams; any material defects, distorted parts, or poor workmanship; any component part omitted. Measurement of item not as specified. Label missing, incorrect, or illegible; not positioned or attached as specified; bar code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

illegible; bar code label not visible on folded, packaged item; bar code label causes damage to the item; any items not packaged in accordance with the contract or order.

5.3 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6. PACKAGING

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or purchase order.

7. NOTES

7.1 Source of Government documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

7.2 Source of non-Government documents.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D3176 - Mass per unit area weight of fabric

(Applications for copies should be addressed to American Society for Testing and Materials (ASTM), 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959).

AMERICAN ASSOCIATION OF TEXTILES CHEMISTS AND COLORISTS (AATCC)


AATCC 61 - Fiber Analysis Quantitative
AATCC 132 - Colorfastness to Dry Cleaning
AATCC 15 - Colorfastness to Perspiration
AATCC 8 - Colorfastness to Crocking
AATCC 81 - pH of Water Extract from Bleached Textiles

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P. O. Box 12215, Research Triangle Park, NC 27709-2215)

Custodian:
Navy - NU

Preparing Activity:
DLA - CT
Project 8405-0351

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

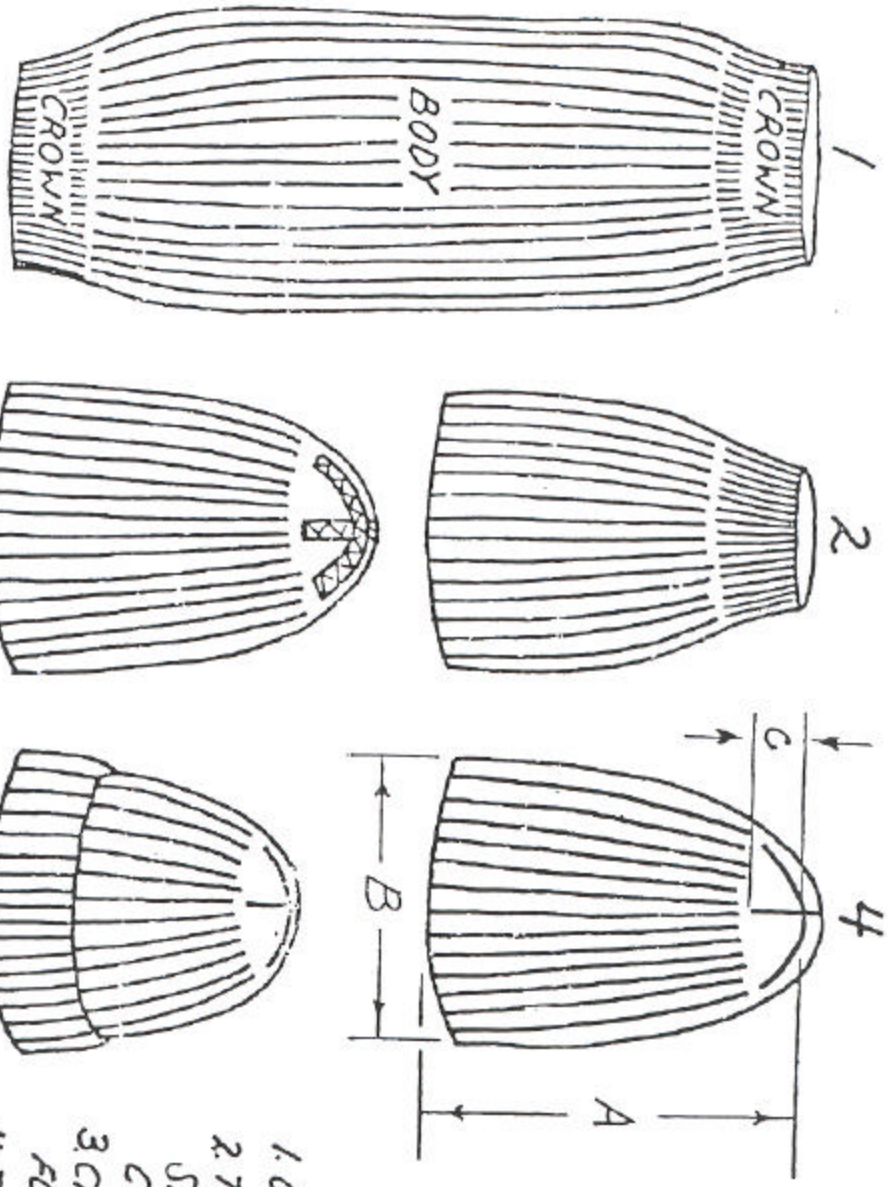


LEGEND

1. ONE FULL KNITTING REPEAT
2. TURNED INSIDE OUT TO SIMULATE A 2 PLY CONSTRUCTION
3. CROWN FORMED WITH A FOUR DART CLOSURE TOP
4. TURNED TO FINISHED POSITION
5. FINISHED CAP AS WORN BOTTOM EDGE TURNED UP

FIGURE 1 - SIMULATED 2 PLY CONSTRUCTION KNIT WATCH CAP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.

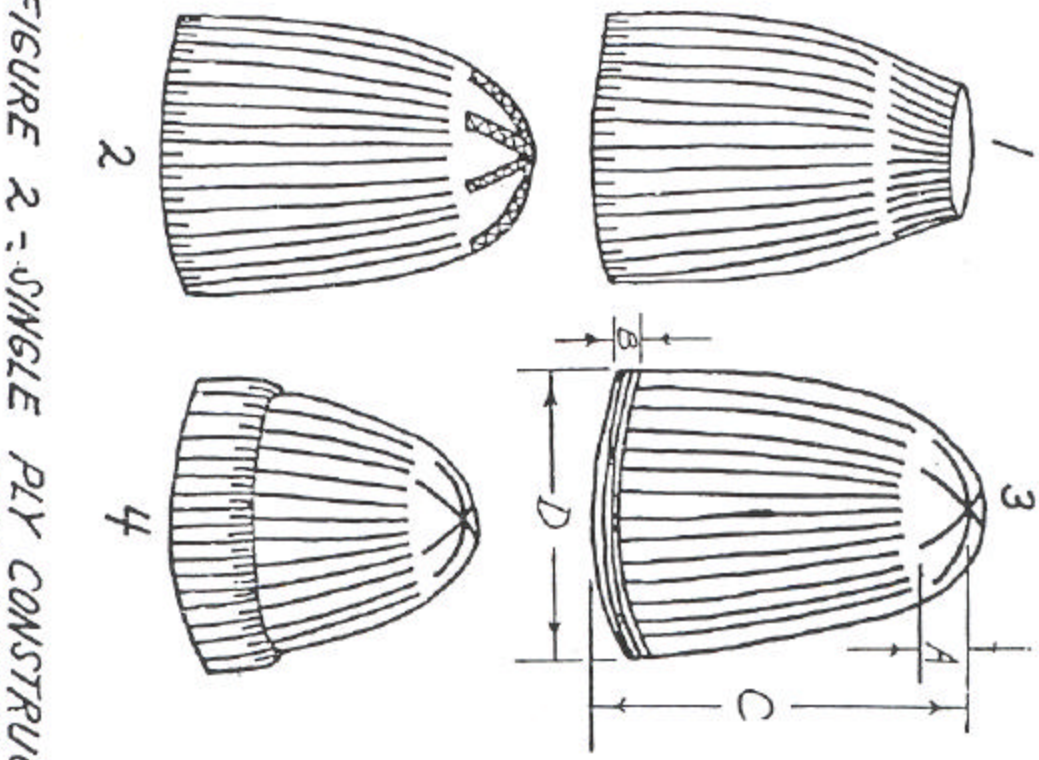

LEGEND

1. SINGLE PLY CONSTRUCTION
2. CROWN FORMED WITH A SIX DART CLOSURE
3. TURNED TO FINISHED POSITION
4. FINISHED CAP AS WORN BOTTOM EDGE TURNED UP

FIGURE 2 - SINGLE PLY CONSTRUCTION KNIT WATCH CAP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:41Z
Check the source to verify that this is the current version before use.