INCH-POUND


MIL-C-49055/1C
16 February 1990
SUPERSEDING
MIL-C-49055/1B
15 July 1983

MILITARY SPECIFICATION SHEET

# CABLES, ELECTRICAL, (FLEXIBLE, FLAT, UNSHIELDED), (ROUND CONDUCTOR), (WIRE SIZE 26, 7/34 or 28, 7/36 STRANDING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-49055.

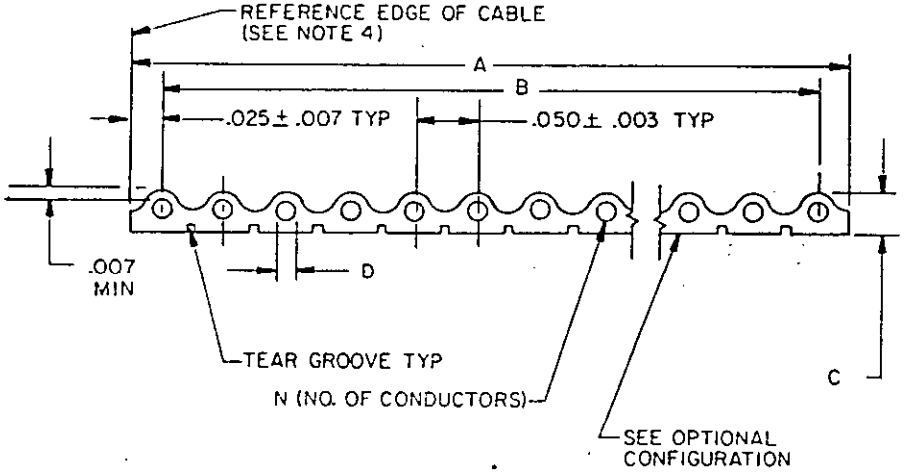


| Inches | mm |
|---|---|
| .003 | .08 |
| .007 | .18 |
| .025 | .64 |
| .050 | 1.27 |



OPTIONAL CONFIGURATION

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All undimensional pictorial representations are for reference purposes only.
4. Cable marking shall be placed along reference edge of cable.

FIGURE 1. Round conductor flat cable.

Ⓒ denotes changes.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:45Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

| Dash number | Number of conductors "N" | Cable width "A" | Weight (lbs/1,000 ft) Nom 1/ | Weight (lbs/1,000 ft) Max | AWG | Dia "C" inches ±.003 | Dia "D" | Stranding | End conductor to end conductor "B" |
|---|---|---|---|---|---|---|---|---|---|
| 01 | 9 | 0.450 ±0.010 | 10.3 | 11.7 | 28 | .035 | 0.015 | 7/36 | 0.400 ±0.010 |
| 02 | 10 | 0.500 ±0.010 | 11.4 | 13.0 | " | " | " | " | 0.450 ±0.010 |
| 03 | 14 | 0.700 ±0.010 | 16.0 | 18.2 | " | " | " | " | 0.650 ±0.010 |
| 04 | 15 | 0.750 ±0.010 | 17.1 | 19.5 | " | " | " | " | 0.700 ±0.010 |
| 05 | 16 | 0.800 ±0.015 | 18.3 | 20.9 | " | " | " | " | 0.750 ±0.011 |
| 06 | 20 | 1.000 ±0.015 | 22.9 | 26.1 | " | " | " | " | 0.950 ±0.011 |
| 07 | 24 | 1.200 ±0.015 | 27.4 | 31.2 | " | " | " | " | 1.150 ±0.011 |
| 08 | 25 | 1.250 ±0.015 | 28.5 | 32.5 | " | " | " | " | 1.200 ±0.011 |
| 09 | 26 | 1.300 ±0.015 | 29.7 | 33.9 | " | " | " | " | 1.250 ±0.011 |
| 10 | 34 | 1.700 ±0.020 | 38.9 | 44.3 | " | " | " | " | 1.650 ±0.015 |
| 11 | 37 | 1.850 ±0.020 | 42.2 | 48.1 | " | " | " | " | 1.800 ±0.015 |
| 12 | 40 | 2.000 ±0.020 | 45.7 | 52.1 | " | " | " | " | 1.950 ±0.015 |
| 13 | 50 | 2.500 ±0.020 | 57.2 | 65.2 | " | " | " | " | 2.450 ±0.015 |
| 14 | 60 | 3.000 ±0.020 | 68.6 | 78.2 | " | " | " | " | 2.950 ±0.015 |
| 15 | 64 | 3.200 ±0.020 | 73.2 | 83.4 | " | " | " | " | 3.150 ±0.015 |
| 16 | 9 | 0.450 ±.010 | 14.4 | 16.4 | 26 | .039 | .019 | 7/34 | 0.400 ±0.010 |
| 17 | 10 | 0.500 ±.010 | 16.0 | 18.2 | " | " | " | " | 0.450 ±0.010 |
| 18 | 14 | 0.700 ±.010 | 22.4 | 25.5 | " | " | " | " | 0.650 ±0.010 |
| 19 | 15 | 0.750 ±.010 | 24.0 | 27.3 | " | " | " | " | 0.700 ±0.010 |
| 20 | 16 | 0.800 ±.015 | 25.6 | 29.2 | " | " | " | " | 0.750 ±0.011 |
| 21 | 20 | 1.000 ±.015 | 32.0 | 36.5 | " | " | " | " | 0.950 ±0.011 |
| 22 | 24 | 1.200 ±.015 | 38.4 | 43.8 | " | " | " | " | 1.150 ±0.011 |
| 23 | 25 | 1.250 ±.015 | 40.0 | 45.6 | " | " | " | " | 1.200 ±0.011 |
| 24 | 26 | 1.300 ±.015 | 41.6 | 47.4 | " | " | " | " | 1.250 ±0.011 |
| 25 | 34 | 1.700 ±.020 | 54.4 | 62.0 | " | " | " | " | 1.650 ±0.015 |
| 26 | 37 | 1.850 ±.020 | 59.2 | 67.5 | " | " | " | " | 1.800 ±0.015 |
| 27 | 40 | 2.000 ±.020 | 64.0 | 73.0 | " | " | " | " | 1.950 ±0.015 |
| 28 | 50 | 2.500 ±.020 | 80.0 | 91.2 | " | " | " | " | 2.450 ±0.015 |
| 29 | 60 | 3.000 ±.020 | 96.0 | 109.4 | " | " | " | " | 2.950 ±0.015 |
| 30 | 64 | 3.200 ±.020 | 102.4 | 116.7 | " | " | " | " | 3.150 ±0.015 |

1/ Nominal values are for information only.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

(C) Insulation material: Polyvinylchloride (PVC).

Voltage rating: 300 volts rms at sea level.

Conductor coating: Tin.

Conductor stranding: See table I.

Weight: See table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:45Z
Check the source to verify that this is the current version before use.

Insulation flaws: 2,500 volts rms.

Dielectric withstanding voltage: 2,000 volts rms.

Insulation resistance: 500 megohms-1,000 feet (minimum).

Conductor resistance: 69.0 ohms maximum/1,000 feet at 23°C.

Ⓒ Temperature rating: -20°C to +105°C.

Thermal shock: -55°C ±5°C; +105°C ±5°C, shrinkage 0.0625 inch maximum either end.

Flexing endurance: -20°C ±5°C; +105°C ±5°C, 50 cycles.

Moisture resistance:

Insulation resistance 50 megohms: 1,000 feet (minimum).

Low pressure (elevated temperature): +105°C (maximum conductor temperature).

Ⓒ Shrinkage: 0.125 inch maximum either end.

Color: Optional.

Ⓒ Part or Identifying Number (PIN): M49055/1-(dash number from table I). The term Part or Identifying Number (PIN) is equivalent to the term part number which was previously used in this specification.

Ⓒ TABLE II. Supersession data.

| New PIN 1/ | Superseded PIN 1/ |
|---|---|
| M49055/1-** | M49055/1-**A<br>M49055/1-**B |

1/ ** denotes dash number from table I.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - EC, OS, SH
Air Force - 11, 17, 99
DLA - IS, ES
NASA - MSFC

User activities:
Army - AT, ME
Navy - MC

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 6145-1163-01)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:45Z
Check the source to verify that this is the current version before use.