INCH-POUND

MIL-DTL-52286/2C
18 May 2010
SUPERSEDING
MIL-C-52286/2B
10 July 1978

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, POWER, ELECTRICAL, 2 CONDUCTOR, 20 FEET LONG, OVAL TERMINATIONS, WITH THREE 2-POLE CONNECTORS

Inactive for new design after 9 December 2003.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-52286, "Cable Assemblies, Power, Electrical (with Molded on Terminations)".

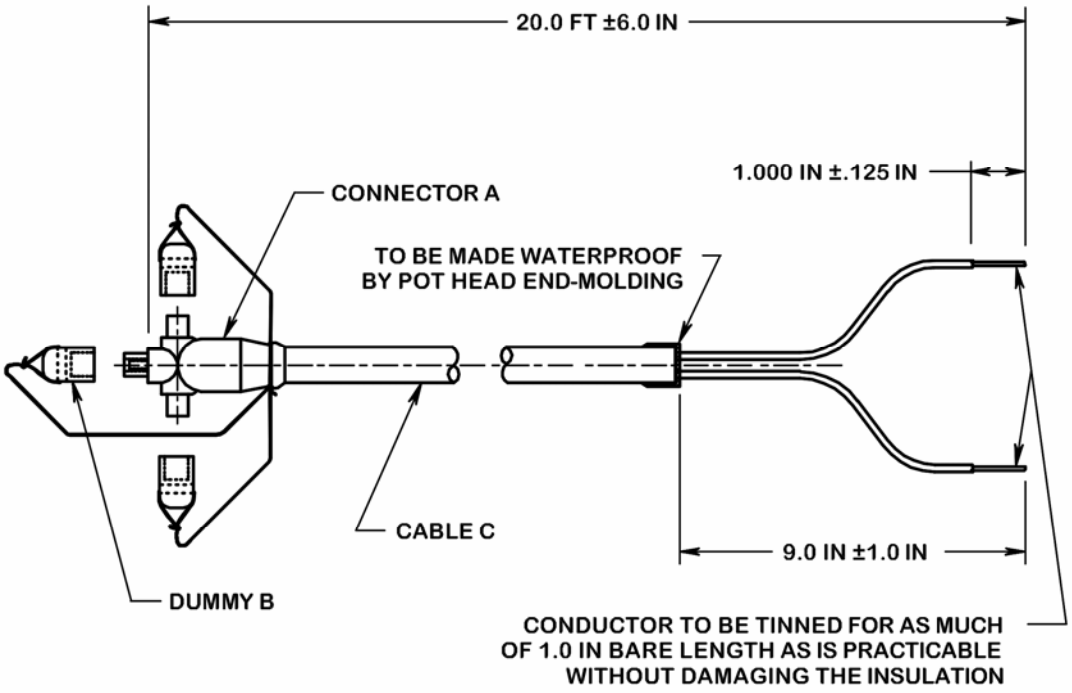


FIGURE 1. Cable assembly, power, electrical, three 2-pole connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations shall be in accordance with figure 1 and the MIL-DTL-52286 figures as specified.

Connector A shall be in accordance with figure 6 of MIL-DTL-52286.

Dummy B shall be in accordance with figure 8 of MIL-DTL-52286.

Cable C shall consist of CO-02 HLF (2/8) 0805.

Minimum bond between connectors and cables: 70 pounds.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR4
DLA - GS

Preparing Activity:
DLA - GS8

(Project 6150-2010-004)

Review Activity:
Army - AT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:12Z
Check the source to verify that this is the current version before use.