MILITARY SPECIFICATION

OUTSERT, EYELENS, M1

This amendment forms a part of MIL-O-0050077F(EA), dated 15 August 1983, and is approved for use within the Chemical Research, Development and Engineering Center, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1.2,

Change "C5-2-997" to "C5-2-998"

Under "PUBLICATIONS" add:

"EDGEWOOD ARSENAL INSTRUCTION MANUAL

136-300-118 - Instruction Manual for the Operation and Maintenance of Shadowgraph, Lens, Opthalmic, Simple."

PAGE 3

3.1 and 3.2, Change "C5-2-997" to "C5-2-998".

Add the following new paragraphs:

"3.3 Local defects (see figure 2). When tested as specified in 4.4.4.4, any local defects present in the lens shall satisfy the following requirements:

3.3.1 Magnitude. The lens shall exhibit no local defect whose magnitude or intensity exceeds the allowable maximum for the applicable zone.

3.3.2 Number. The total number of detectable local defects in the lens shall not exceed two in zone A or five in zone B.

3.3.3 Proximity. In zones A and B there shall be no two detectable local defects separated by less than 1/4 inch.

Renumber 3.3 to 3.4.

FSC 4240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:16Z
Check the source to verify that this is the current version before use.

PAGE 4

3.4, Renumber to 3.5, and amend paragraph, replacing the last sentence with: "The lens shall be colorless, smooth, and free from blemishes (internal and external), striae, waves, and damage such cracks, splits, and other visible defects as revealed in shadowgraph examination (see 4.4.4.4), which will impair its appearance or cause distortion of vision. In addition, the lens shall be free from foreign matter. Local defects of a magnitude greater than the referee standards established by the Government for major and minor defects (see 6.9) shall be categorized under the appropriate defect class."

PAGE 5

3.5, Renumber to 3.6.

PAGE 6

4.4.3.3, Make the following changes:

Major defect 102, Delete "(see 3.4)" and substitute "(see 3.5)".

Add the following major defects:

"103 Defects, over limits (Zone A) (see figure 2) 4.4.4.4"

Add the following minor defects:

"205 Defects, over limits (Zone B) (see figure 2) 4.4.4.4"

Delete "201 Instruction card missing or incorrect when applicable".

Change "202 Marking (instruction card or pouch) illegible or incorrect." to "202 Marking (repair parts only) illegible or incorrect."

Renumber 202, 203, 204, 205 to 201, 202, 203, 204.

4.4.3.3(a), Change "(Dwg C5-2-997)" to "(Dwg C5-2-998)".

PAGE 7

4.4.4.4, Add new paragraph as follows:

"4.4.4.4 Local defects. The lens shall be examined for compliance with 3.3 by comparative shadowgraph reviewing with the referee standards in accordance with instruction manual 136-300-118."



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:16Z
Check the source to verify that this is the current version before use.

PAGE 10

6.9, Add new paragraph as follows:

"6.9 Referee standards. The Government will furnish referee standards in the form of actual lenses or transparencies to define the type and category (major and minor) of each defect. These referee standards are based upon the defect magnitude and the potential deleterious effect on the wearer."

PAGE 11

Add Figure 2 - Lens, Cylindrical, Plastic.

Custodian:

Army - EA

Preparing activity:

Army - EA

Project No. 4240-A866



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:16Z
Check the source to verify that this is the current version before use.

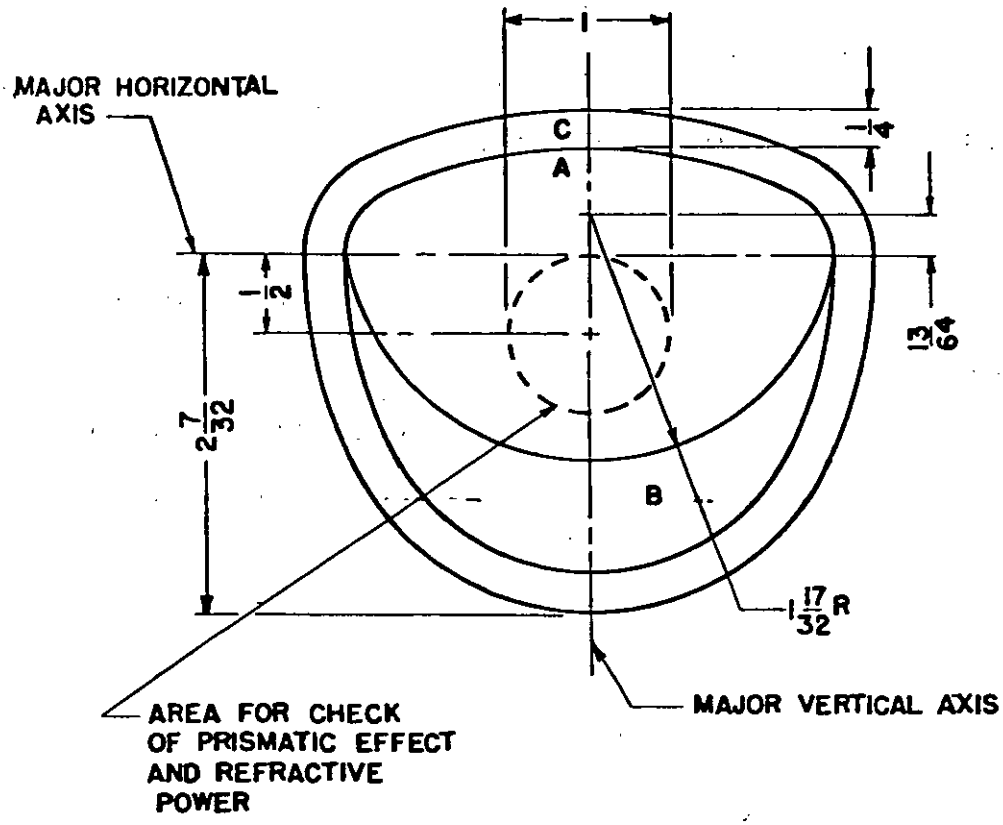



Figure 2 – Lens, Cylindrical, Plastic

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 — 704-036/46703

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:16Z
Check the source to verify that this is the current version before use.